

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744807

Luminaire Tested: LD4D25D010-EU4DR1515309024-4LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744807
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR1515309024-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1907.1 lumens
Efficiency: N/A
Efficacy: 76.0 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744807

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBSQW1MW

Luminous Intensity Polar Plot

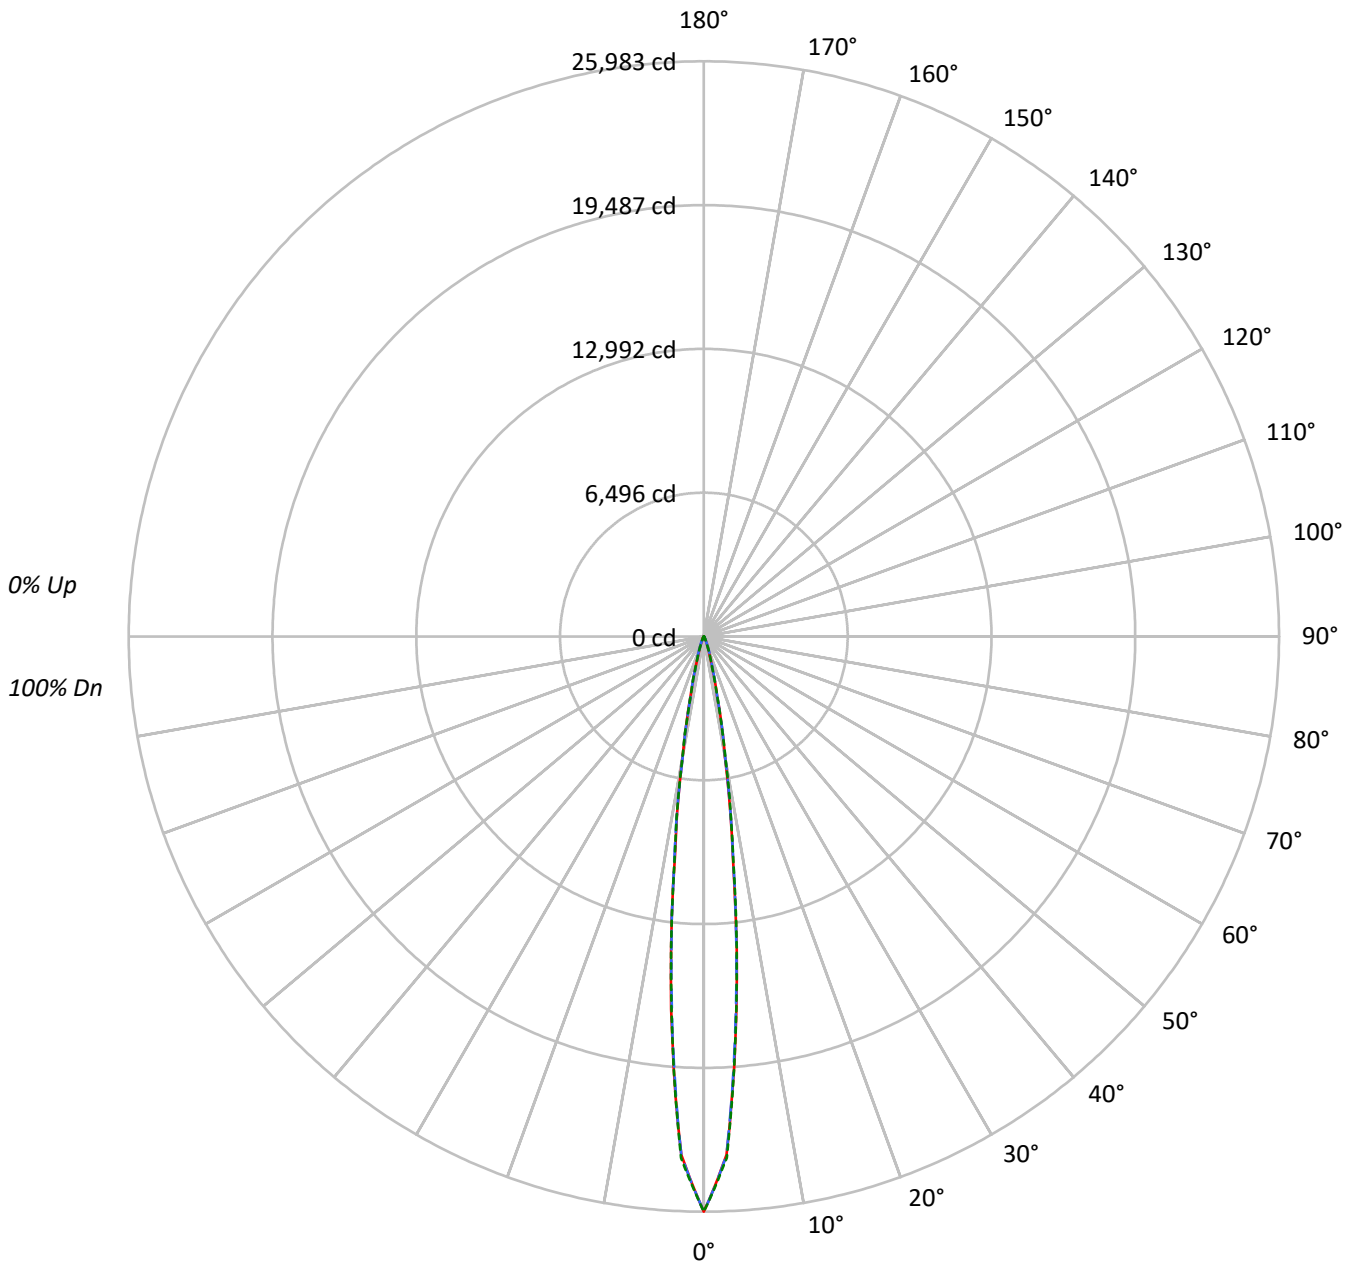



TEST NUMBER: P744807

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2923617	2923617	2923617
5°	1718057	1695810	1709225
10°	512763	516355	524258
15°	127541	130025	126012
20°	38162	44192	38972
25°	13453	17138	13625
30°	4942	6507	5025
35°	2476	2796	2396
40°	1562	1719	1562
45°	1155	1232	1155
50°	918	918	918
55°	766	766	766
60°	618	618	618
65°	471	471	471
70°	402	402	402
75°	249	249	333
80°	173	173	173
85°	91	91	91

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 1232 cd/sqm



TEST NUMBER: P744807

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1236.8	64.9
10°-20°	508.8	26.7
20°-30°	101.1	5.3
30°-40°	25.2	1.3
40°-50°	13.3	0.7
50°-60°	9.8	0.5
60°-70°	6.9	0.4
70°-80°	4.0	0.2
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1846.7	96.8
0°-40°	1871.9	98.2
0°-60°	1895.0	99.4
0°-90°	1907.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1907.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	25983	25983	25983	25983	25983	
5°	16905	16731	16686	16802	16818	1235
15°	1468	1496	1497	1471	1451	503
25°	173	196	220	195	175	91
35°	34	36	38	36	33	23
45°	16	16	18	16	16	13
55°	11	11	11	11	11	10
65°	7	7	7	7	7	7
75°	3	3	3	3	4	4
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P744807

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	25983.1	25983.1	25983.1	25983.1	25983.1
2.5°	23437.8	23457.6	23465.3	23488.4	23574.2
5°	16905.2	16731.4	16686.3	16801.8	16818.3
7.5°	10014.0	10049.2	10177.9	10206.5	10103.1
10°	5495.4	5540.5	5533.9	5573.5	5618.6
12.5°	2810.4	2775.2	2764.2	2809.3	2746.6
15°	1468.4	1495.9	1497.0	1470.6	1450.8
17.5°	789.8	821.7	874.5	831.6	765.6
20°	466.4	495.0	540.1	504.9	476.3
22.5°	288.2	311.3	343.2	315.7	292.6
25°	172.7	195.8	220.0	194.7	174.9
27.5°	102.3	122.1	137.5	121.0	101.2
30°	66.0	77.0	86.9	75.9	67.1
32.5°	46.2	50.6	55.0	50.6	46.2
35°	34.1	36.3	38.5	36.3	33.0
37.5°	26.4	28.6	29.7	27.5	25.3
40°	22.0	23.1	24.2	23.1	22.0
42.5°	18.7	19.8	19.8	19.8	18.7
45°	16.5	16.5	17.6	16.5	16.5
47.5°	14.3	14.3	15.4	14.3	14.3
50°	13.2	13.2	13.2	13.2	13.2
52.5°	12.1	12.1	12.1	12.1	12.1
55°	11.0	11.0	11.0	11.0	11.0
57.5°	9.9	9.9	9.9	9.9	9.9
60°	8.8	8.8	8.8	8.8	8.8
62.5°	7.7	7.7	7.7	7.7	7.7
65°	6.6	6.6	6.6	6.6	6.6
67.5°	6.6	6.6	6.6	6.6	6.6
70°	5.5	5.5	5.5	5.5	5.5
72.5°	4.4	4.4	4.4	4.4	4.4
75°	3.3	3.3	3.3	3.3	4.4
77.5°	3.3	3.3	3.3	3.3	3.3
80°	2.2	2.2	2.2	2.2	2.2
82.5°	2.2	2.2	2.2	2.2	2.2
85°	1.1	1.1	1.1	1.1	1.1
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)