

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745586

Luminaire Tested: LD4D25D010-EU4DR6520359024-4LBSQW1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745586  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR6520359024-4LBSQW1B  
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1393.9 lumens  
Efficiency: N/A  
Efficacy: 55.5 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745586

CATALOG NUMBER: LD4D25D010-EU4DR6520359024-4LBSQW1B

### Luminous Intensity Polar Plot

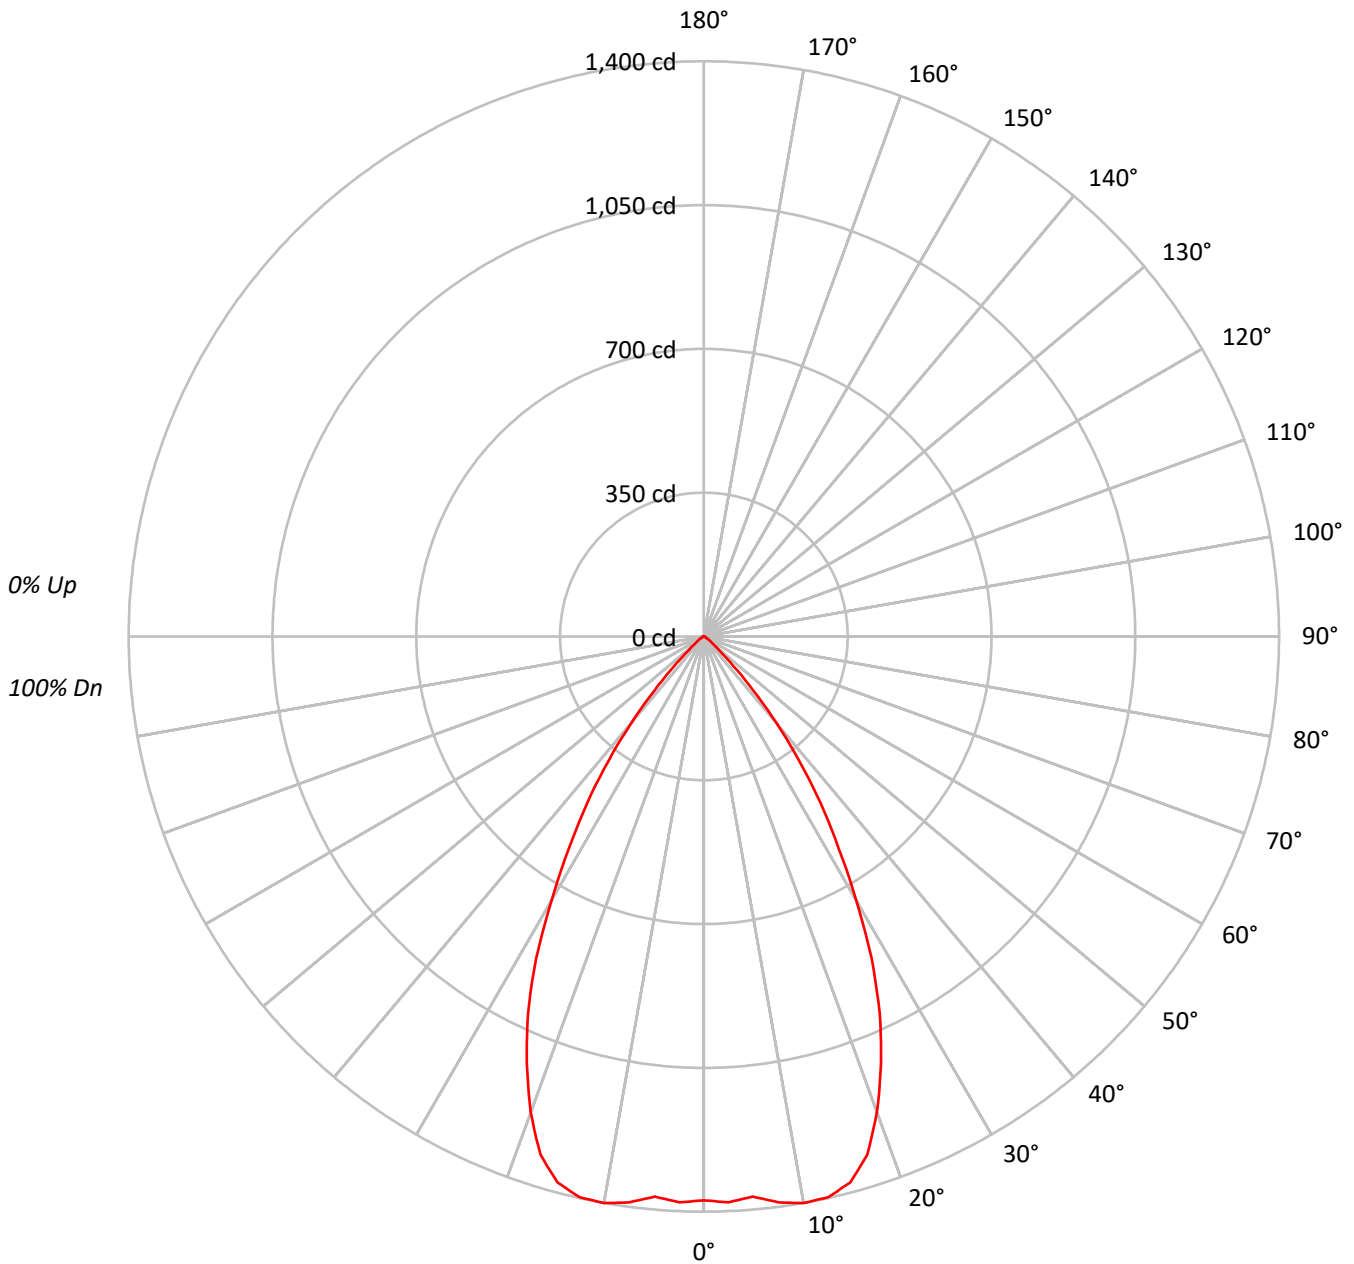



TEST NUMBER: P745586

CATALOG NUMBER: LD4D25D010-EU4DR6520359024-4LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 113 | 111 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 103 | 101 | 101 | 99  | 98  | 97  | 96  | 95  | 93  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 108 | 103 | 99  | 95  | 106 | 101 | 97  | 94  | 98  | 95  | 92  | 95  | 92  | 90  | 92  | 90  | 88  | 87  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 102 | 96  | 91  | 87  | 100 | 94  | 90  | 86  | 92  | 88  | 85  | 89  | 86  | 83  | 87  | 84  | 82  | 80  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 97  | 89  | 84  | 79  | 95  | 88  | 83  | 79  | 86  | 82  | 78  | 84  | 80  | 77  | 82  | 79  | 76  | 75  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 92  | 83  | 78  | 73  | 90  | 83  | 77  | 73  | 81  | 76  | 72  | 79  | 75  | 72  | 77  | 74  | 71  | 69  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 87  | 78  | 72  | 68  | 86  | 77  | 72  | 68  | 76  | 71  | 67  | 74  | 70  | 67  | 73  | 69  | 66  | 65  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 83  | 73  | 67  | 63  | 81  | 73  | 67  | 63  | 71  | 66  | 62  | 70  | 66  | 62  | 69  | 65  | 62  | 60  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 79  | 69  | 63  | 59  | 77  | 68  | 63  | 59  | 67  | 62  | 58  | 66  | 62  | 58  | 65  | 61  | 58  | 57  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 75  | 65  | 59  | 55  | 74  | 65  | 59  | 55  | 64  | 58  | 55  | 63  | 58  | 55  | 62  | 58  | 54  | 53  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 71  | 61  | 56  | 52  | 70  | 61  | 55  | 52  | 60  | 55  | 51  | 59  | 55  | 51  | 59  | 54  | 51  | 50  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°     |
|-----|--------|
| 0°  | 149949 |
| 5°  | 150073 |
| 10° | 155358 |
| 15° | 155612 |
| 20° | 143271 |
| 25° | 122075 |
| 30° | 93449  |
| 35° | 66024  |
| 40° | 38966  |
| 45° | 15823  |
| 50° | 5728   |
| 55° | 3200   |
| 60° | 1836   |
| 65° | 1008   |
| 70° | 1054   |
| 75° | 802    |
| 80° | 881    |
| 85° | 752    |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 15823 cd/sqm



TEST NUMBER: P745586

CATALOG NUMBER: LD4D25D010-EU4DR6520359024-4LBSQW1B

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 132.2  | 9.5       |
| 10°-20°   | 381.2  | 27.3      |
| 20°-30°   | 457.4  | 32.8      |
| 30°-40°   | 307.4  | 22.0      |
| 40°-50°   | 92.0   | 6.6       |
| 50°-60°   | 16.2   | 1.2       |
| 60°-70°   | 4.6    | 0.3       |
| 70°-80°   | 2.3    | 0.2       |
| 80°-90°   | 0.7    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 970.7  | 69.6      |
| 0°-40°    | 1278.1 | 91.7      |
| 0°-60°    | 1386.3 | 99.5      |
| 0°-90°    | 1393.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1393.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1372 |      |
| 5°  | 1368 | 132  |
| 15° | 1376 | 381  |
| 25° | 1013 | 457  |
| 35° | 495  | 307  |
| 45° | 102  | 92   |
| 55° | 17   | 16   |
| 65° | 4    | 5    |
| 75° | 2    | 2    |
| 85° | 1    | 1    |
| 90° | 0    |      |



TEST NUMBER: P745586

CATALOG NUMBER: LD4D25D010-EU4DR6520359024-4LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1372.4 |
| 2.5°  | 1378.3 |
| 5°    | 1368.3 |
| 7.5°  | 1389.0 |
| 10°   | 1400.3 |
| 12.5° | 1397.6 |
| 15°   | 1375.7 |
| 17.5° | 1322.3 |
| 20°   | 1232.2 |
| 22.5° | 1126.1 |
| 25°   | 1012.6 |
| 27.5° | 884.5  |
| 30°   | 740.7  |
| 32.5° | 610.4  |
| 35°   | 495.0  |
| 37.5° | 380.9  |
| 40°   | 273.2  |
| 42.5° | 178.5  |
| 45°   | 102.4  |
| 47.5° | 54.2   |
| 50°   | 33.7   |
| 52.5° | 23.4   |
| 55°   | 16.8   |
| 57.5° | 12.1   |
| 60°   | 8.4    |
| 62.5° | 5.4    |
| 65°   | 3.9    |
| 67.5° | 3.5    |
| 70°   | 3.3    |
| 72.5° | 2.5    |
| 75°   | 1.9    |
| 77.5° | 1.8    |
| 80°   | 1.4    |
| 82.5° | 1.0    |
| 85°   | 0.6    |
| 87.5° | 0.4    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)