

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745680

Luminaire Tested: LD4D25D010-EU4DR7020359030-4LBCSSQMMS

Issue Date: 1/31/2024

Test Information

Test Method: LM-79-2019
Report Number: P745680
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/31/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR7020359030-4LBCSSQMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2365.7 lumens
Efficiency: N/A
Efficacy: 94.2 lumens/watt
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P745680

CATALOG NUMBER: LD4D25D010-EU4DR7020359030-4LBCSSQMMS

Luminous Intensity Polar Plot

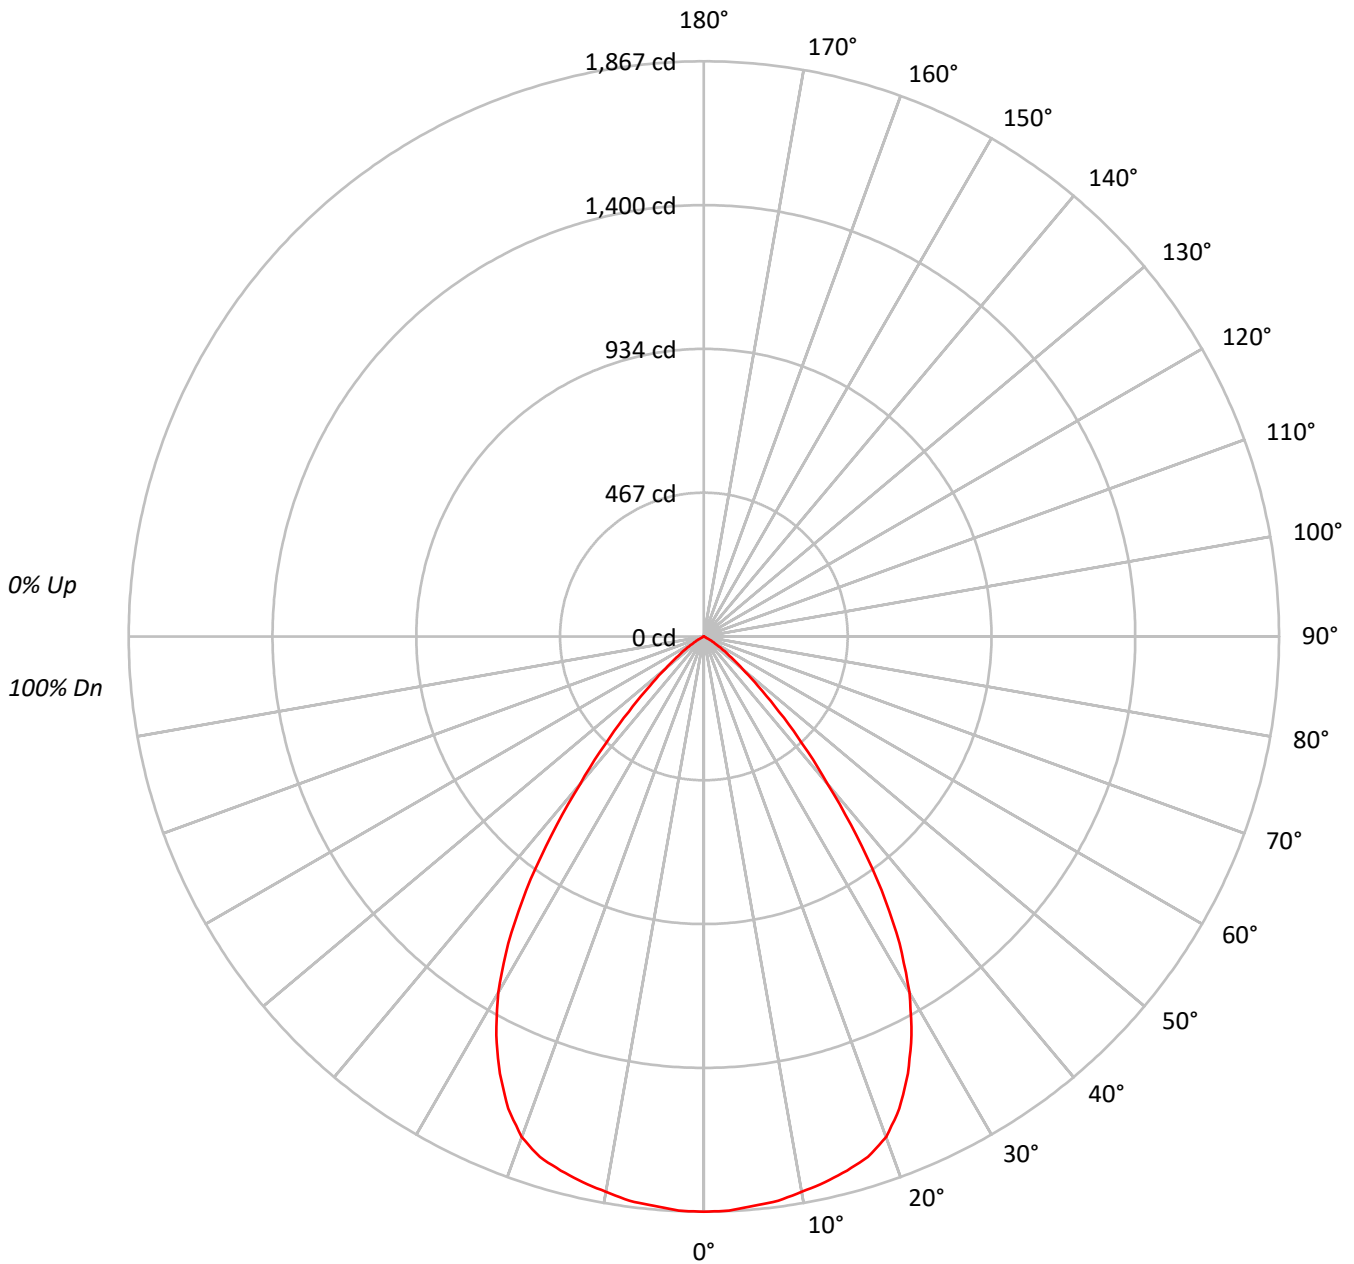



TEST NUMBER: P745680

CATALOG NUMBER: LD4D25D010-EU4DR7020359030-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78			78																
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71			71																
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65			65																
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60			60																
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56			56																
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51			51																
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48			48																
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44			44																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	204012
5°	203497
10°	203065
15°	203008
20°	201024
25°	188827
30°	168340
35°	134223
40°	89129
45°	53293
50°	27622
55°	14515
60°	5135
65°	78
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 53293 cd/sqm



TEST NUMBER: P745680

CATALOG NUMBER: LD4D25D010-EU4DR7020359030-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	176.5	7.5
10°-20°	506.1	21.4
20°-30°	713.9	30.2
30°-40°	616.3	26.1
40°-50°	276.0	11.7
50°-60°	72.2	3.1
60°-70°	4.7	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1396.4	59.0
0°-40°	2012.7	85.1
0°-60°	2361.0	99.8
0°-90°	2365.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2365.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1867	
5°	1855	176
15°	1795	506
25°	1566	714
35°	1006	616
45°	345	276
55°	76	72
65°	0	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P745680

CATALOG NUMBER: LD4D25D010-EU4DR7020359030-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	1867.2
2.5°	1865.2
5°	1855.4
7.5°	1847.4
10°	1830.3
12.5°	1814.8
15°	1794.7
17.5°	1771.5
20°	1728.9
22.5°	1658.7
25°	1566.3
27.5°	1459.2
30°	1334.3
32.5°	1181.6
35°	1006.3
37.5°	812.9
40°	624.9
42.5°	474.8
45°	344.9
47.5°	237.7
50°	162.5
52.5°	112.1
55°	76.2
57.5°	46.0
60°	23.5
62.5°	7.4
65°	0.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)