Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745027

Luminaire Tested: LD4D25D010-EU4DR2520359050-4LBSQW1B

Issue Date: 1/30/2024

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Test Information

Test Method:	LM-79-2019
Report Number:	P745027
	TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab:	COOPER LIGHTING SOLUTIONS
Issue Date:	1/30/2024
Manufacturer:	COOPER LIGHTING SOLUTIONS
Product Line:	PORTFOLIO
Catalog Number:	LD4D25D010-EU4DR2520359050-4LBSQW1B
Description:	4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 25° OPTIC
Light Source:	(1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver:	-

Summary

Lumens per Lamp:	N/A
Luminaire Lumens:	1725.1 lumens
Efficiency:	N/A
Efficacy:	68.7 lumens/watt
Spacing Criteria (0/90/45):	0.42 / 0.42 / 0.45
Luminous Opening:	Circular (Dia: 0.35' x H: 0')
CIE Type:	Direct

Input Watts (W):	25.1
Input Voltage (V):	NR
Input Current (Ain):	NR
Voltage Rise (V):	NR
Power Factor:	NR
Total Harmonic Distortion (THDi):	NR
Frequency (hertz):	60
Stabilization Time:	NR
Operation Time:	NR
Ambient Temperature (°C):	NR
Test Distance:	24 FT

Downlight

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P745027
CATALOG NUMBER: LD4D25D010-EU4DR2520359050-4LBSQW1B

Luminous Intensity Polar Plot

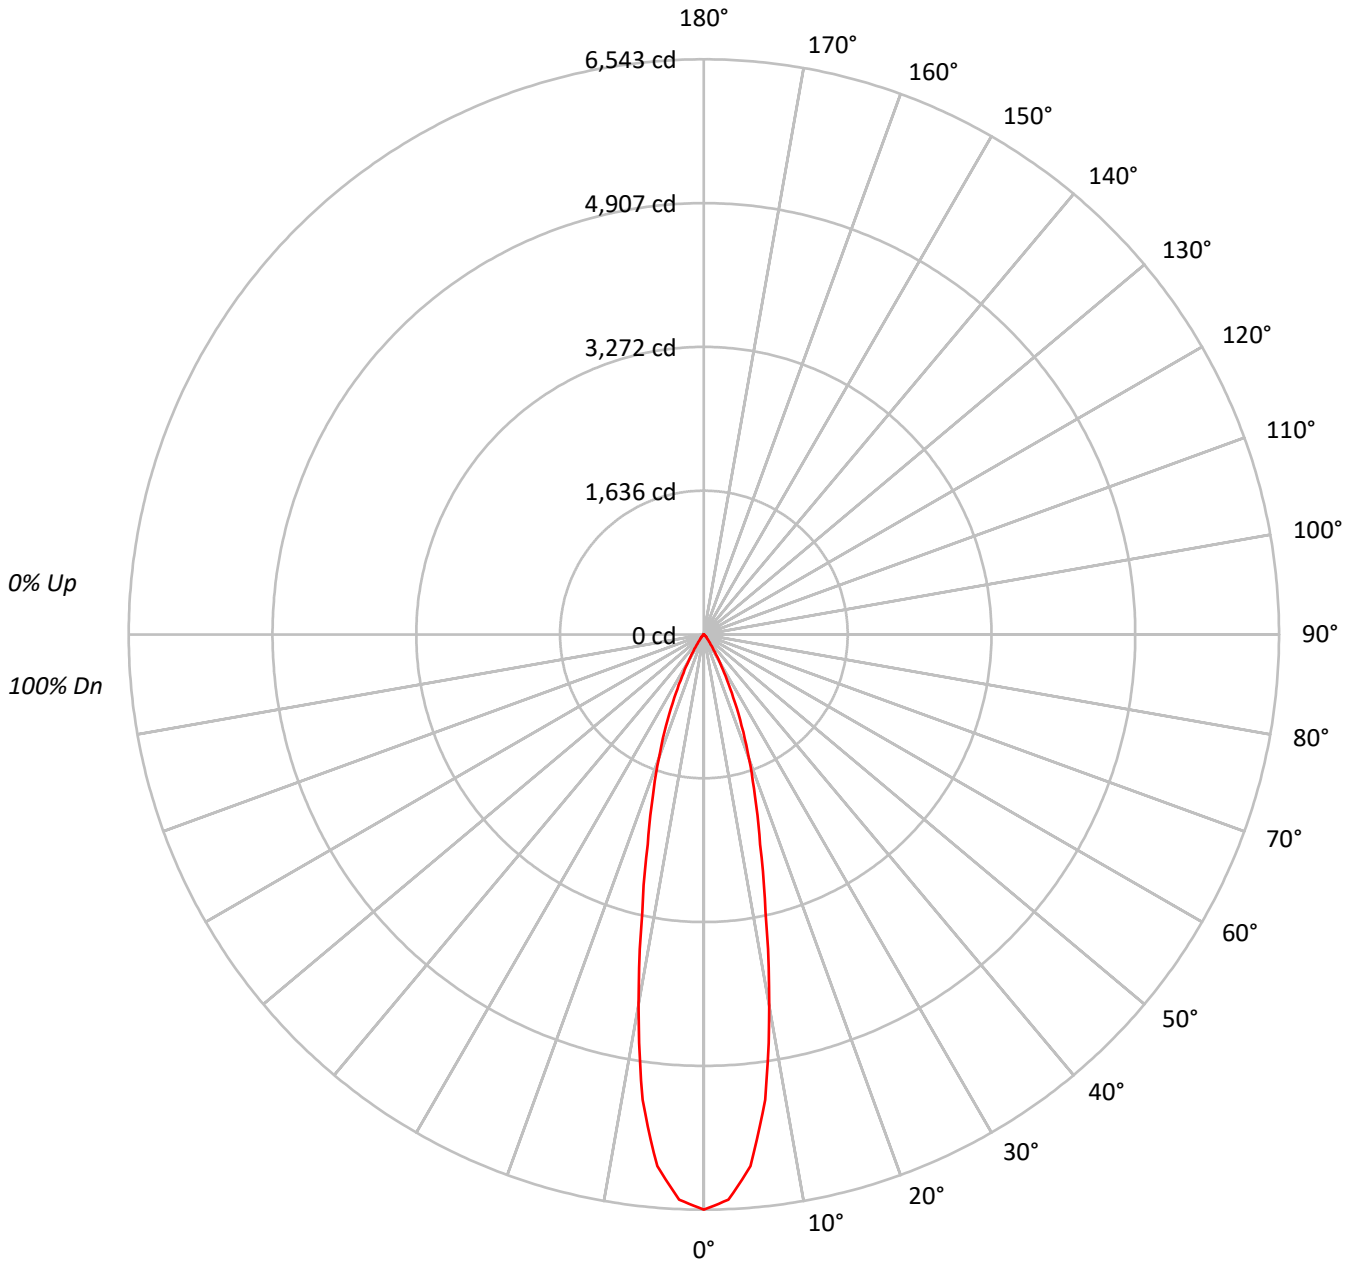

TEST NUMBER: P745027
CATALOG NUMBER: LD4D25D010-EU4DR2520359050-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	714882
5°	665823
10°	474950
15°	279734
20°	174049
25°	95516
30°	43678
35°	16539
40°	7488
45°	4512
50°	1870
55°	1200
60°	830
65°	569
70°	96
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4512 cd/sqm

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P745027
CATALOG NUMBER: LD4D25D010-EU4DR2520359050-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	521.7	30.2
10°-20°	706.6	41.0
20°-30°	373.9	21.7
30°-40°	92.3	5.4
40°-50°	22.5	1.3
50°-60°	5.9	0.3
60°-70°	2.0	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1602.3	92.9
0°-40°	1694.6	98.2
0°-60°	1723.1	99.9
0°-90°	1725.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1725.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6543	
5°	6071	522
15°	2473	707
25°	792	374
35°	124	92
45°	29	23
55°	6	6
65°	2	2
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P745027
CATALOG NUMBER: LD4D25D010-EU4DR2520359050-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	6542.9
2.5°	6435.4
5°	6070.7
7.5°	5338.1
10°	4280.9
12.5°	3236.1
15°	2473.0
17.5°	1927.3
20°	1496.9
22.5°	1122.6
25°	792.3
27.5°	531.4
30°	346.2
32.5°	210.7
35°	124.0
37.5°	75.9
40°	52.5
42.5°	40.2
45°	29.2
47.5°	17.6
50°	11.0
52.5°	8.0
55°	6.3
57.5°	4.9
60°	3.8
62.5°	3.0
65°	2.2
67.5°	0.8
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Report Generated By 670245859 / DESKTOP-T8S5UU9

0°-180°

(END OF REPORT)