

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745976

Luminaire Tested: LD4D30D010-EU4DR3020359024-4LBSQW1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P745976
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR3020359024-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1732.7 lumens
Efficiency: N/A
Efficacy: 59.7 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P745976

CATALOG NUMBER: LD4D30D010-EU4DR3020359024-4LBSQW1B

Luminous Intensity Polar Plot

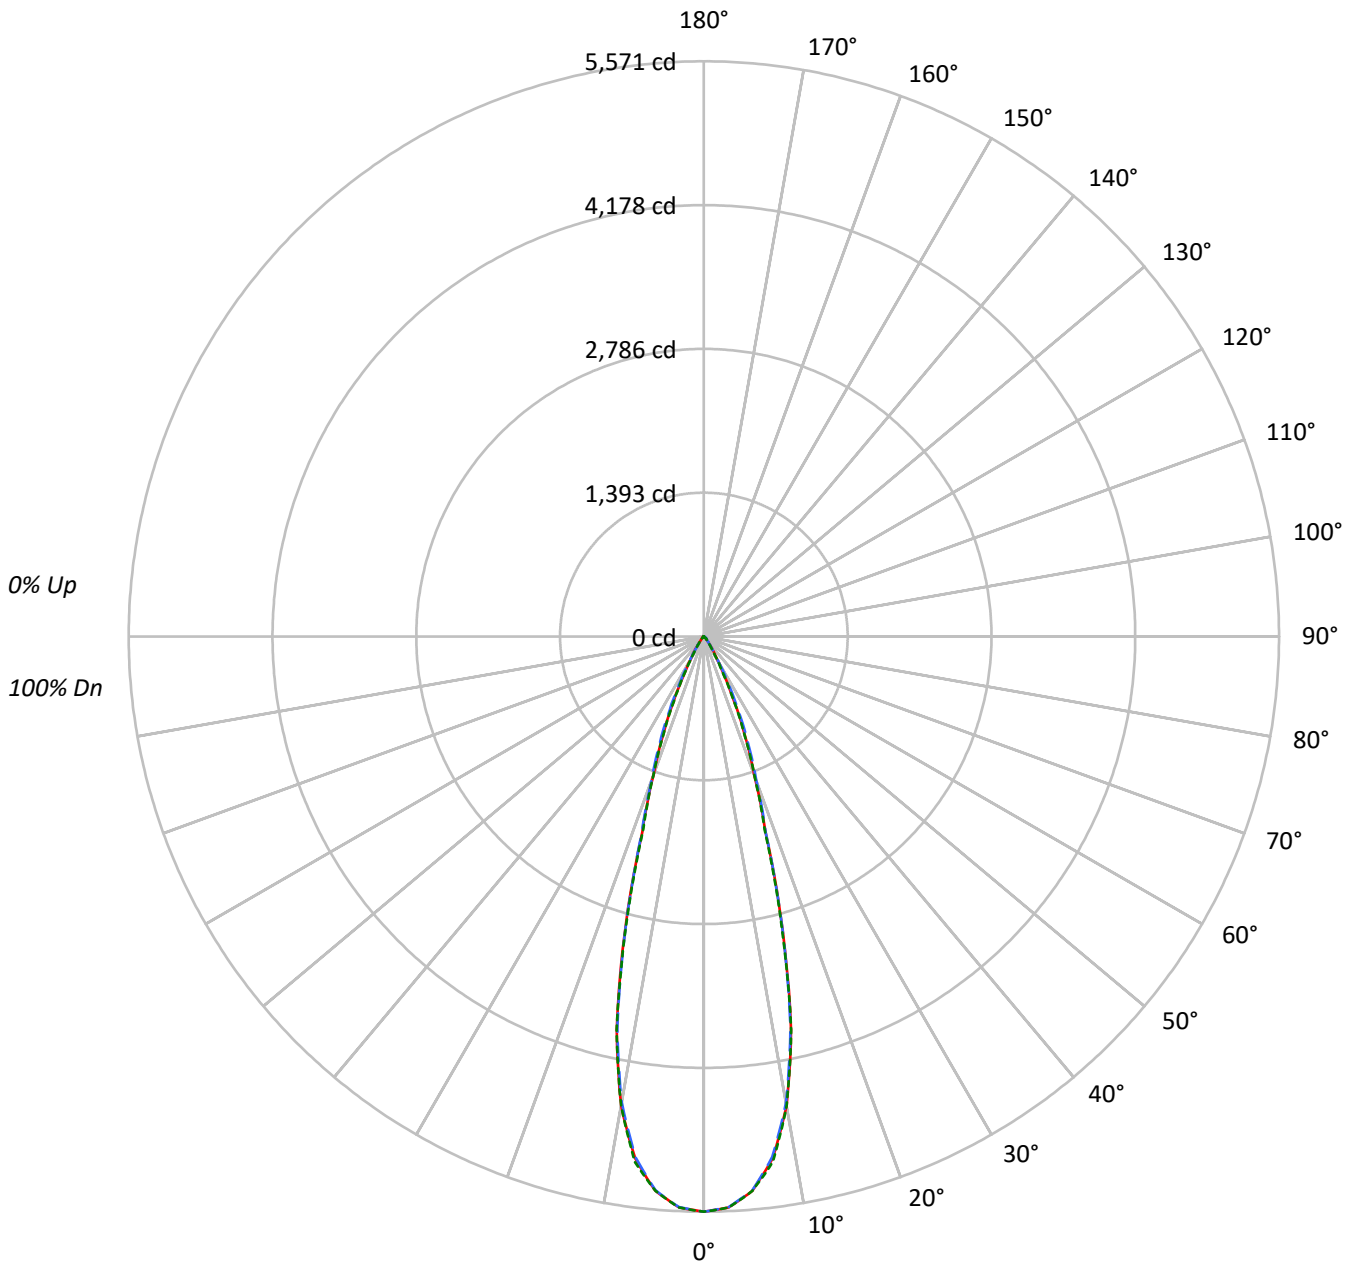



TEST NUMBER: P745976

CATALOG NUMBER: LD4D30D010-EU4DR3020359024-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	426454	426454	426454
5°	414214	413730	414229
10°	358767	356241	358682
15°	234078	232818	231653
20°	116392	120766	116237
25°	58630	66121	57430
30°	23475	25579	20452
35°	10886	10428	8746
40°	4696	5226	4426
45°	3323	4113	3345
50°	1143	3001	1203
55°	654	1241	694
60°	459	551	459
65°	308	308	308
70°	179	134	179
75°	0	89	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 4113 cd/sqm



TEST NUMBER: P745976

CATALOG NUMBER: LD4D30D010-EU4DR3020359024-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	489.9	28.3
10°-20°	789.0	45.5
20°-30°	341.0	19.7
30°-40°	77.7	4.5
40°-50°	26.7	1.5
50°-60°	6.5	0.4
60°-70°	1.7	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1619.9	93.5
0°-40°	1697.6	98.0
0°-60°	1730.8	99.9
0°-90°	1732.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1732.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	5571	5571	5571	5571	5571	
5°	5391	5386	5385	5396	5391	490
15°	2954	2918	2938	2928	2923	791
25°	694	720	783	702	680	332
35°	116	119	112	111	94	79
45°	31	38	38	38	31	22
55°	5	5	9	5	5	5
65°	2	2	2	2	2	2
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P745976

CATALOG NUMBER: LD4D30D010-EU4DR3020359024-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	5571.4	5571.4	5571.4	5571.4	5571.4
2.5°	5534.5	5530.6	5532.8	5535.6	5536.7
5°	5390.9	5385.7	5384.6	5395.8	5391.1
7.5°	5101.2	5093.8	5082.6	5108.0	5131.8
10°	4615.9	4607.7	4583.4	4595.4	4614.8
12.5°	3899.6	3873.0	3872.5	3910.7	3905.6
15°	2953.9	2918.4	2938.0	2928.5	2923.3
17.5°	1986.4	1972.7	1999.0	1991.1	1956.9
20°	1428.9	1432.5	1482.6	1457.4	1427.0
22.5°	1042.7	1055.6	1115.0	1050.1	1026.3
25°	694.2	720.5	782.9	702.2	680.0
27.5°	427.0	439.1	502.2	421.5	409.5
30°	265.6	259.6	289.4	248.4	231.4
32.5°	174.2	166.6	176.2	158.1	144.4
35°	116.5	119.0	111.6	110.8	93.6
37.5°	72.8	83.7	73.9	78.8	60.2
40°	47.0	60.7	52.3	57.7	44.3
42.5°	38.6	46.8	43.0	45.7	39.4
45°	30.7	38.0	38.0	38.0	30.9
47.5°	17.0	25.4	32.5	26.0	18.0
50°	9.6	12.8	25.2	13.4	10.1
52.5°	6.6	7.4	17.2	7.7	6.8
55°	4.9	5.2	9.3	5.4	5.2
57.5°	3.8	4.1	4.9	4.1	3.8
60°	3.0	3.0	3.6	3.3	3.0
62.5°	2.2	2.2	2.5	2.2	2.2
65°	1.7	1.7	1.7	1.7	1.7
67.5°	0.8	1.1	1.1	1.1	1.1
70°	0.8	0.6	0.6	0.6	0.8
72.5°	0.6	0.3	0.3	0.3	0.3
75°	0.0	0.0	0.3	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)