

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746279

Luminaire Tested: LD4D30D010-EU4DR5020359024-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P746279  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR5020359024-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 50° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2352.5 lumens  
Efficiency: N/A  
Efficacy: 81.1 lumens/watt  
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P746279

CATALOG NUMBER: LD4D30D010-EU4DR5020359024-4LBCSSQMW

### Luminous Intensity Polar Plot

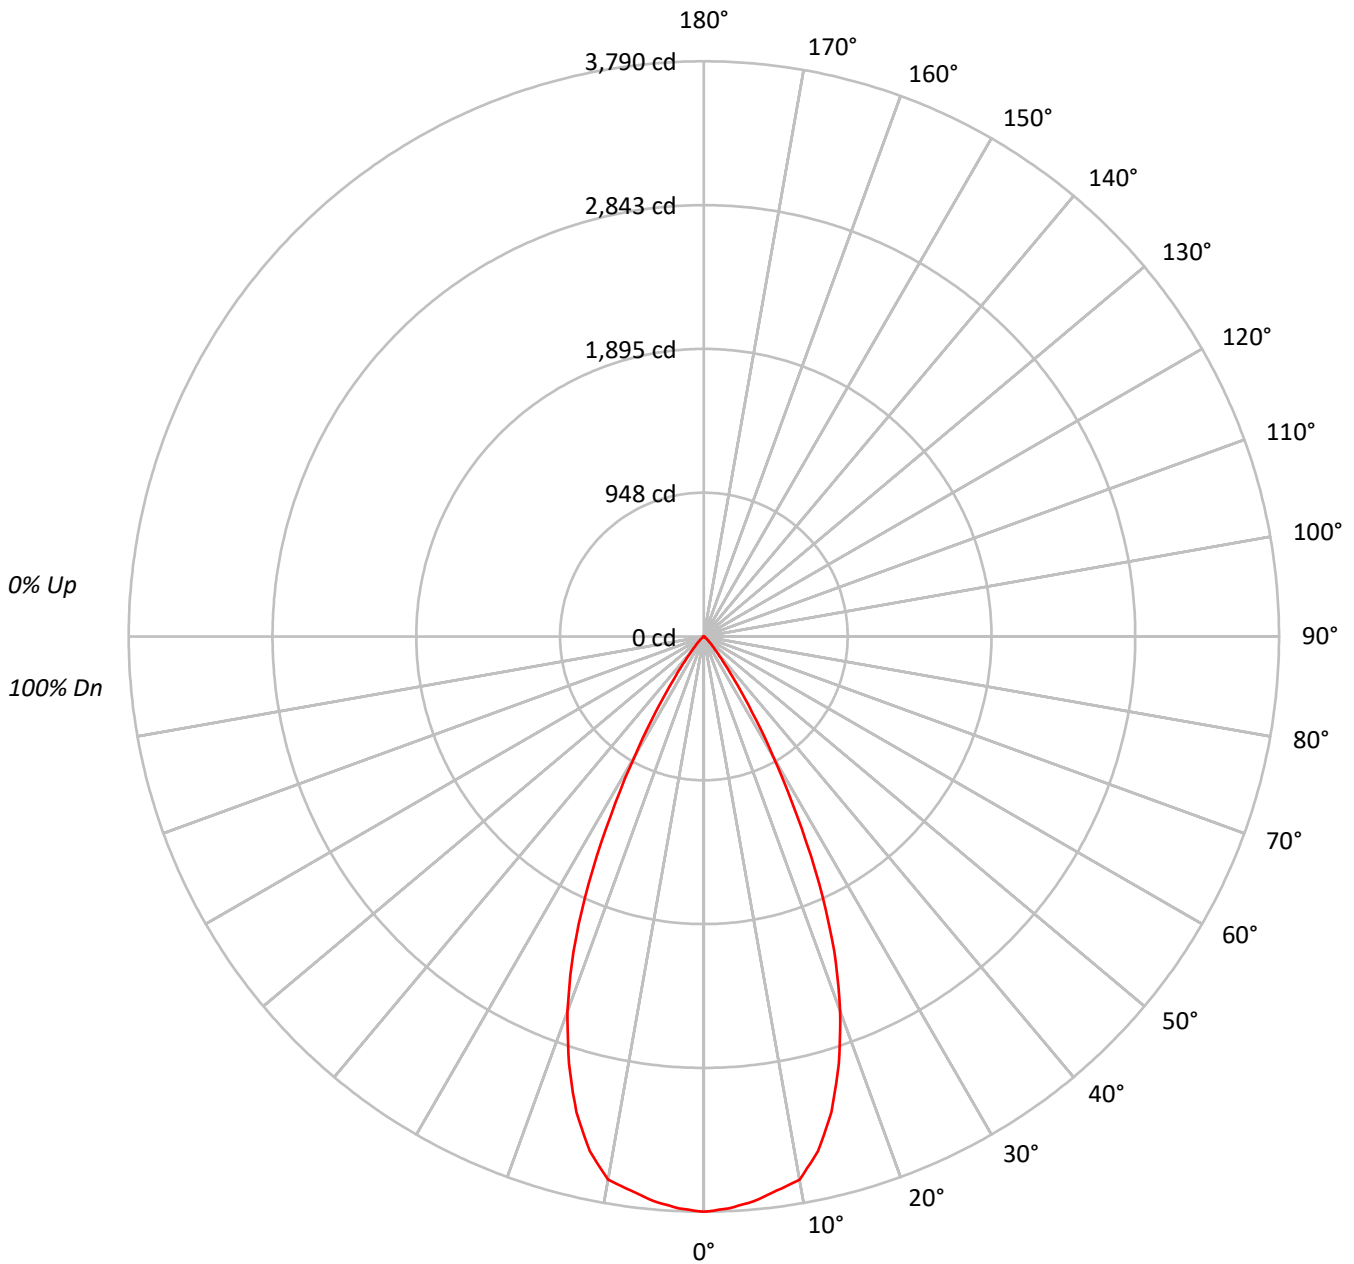



TEST NUMBER: P746279

CATALOG NUMBER: LD4D30D010-EU4DR5020359024-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95			
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90			
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85			
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80			
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76			
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72			
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69			
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65			
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62			
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	414153
5°	409823
10°	403068
15°	367024
20°	305402
25°	216796
30°	114746
35°	46764
40°	17372
45°	7958
50°	3264
55°	1695
60°	830
65°	259
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7958 cd/sqm



TEST NUMBER: P746279

CATALOG NUMBER: LD4D30D010-EU4DR5020359024-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	353.2	15.0
10°-20°	892.6	37.9
20°-30°	801.8	34.1
30°-40°	251.0	10.7
40°-50°	44.0	1.9
50°-60°	8.8	0.4
60°-70°	1.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2047.5	87.0
0°-40°	2298.5	97.7
0°-60°	2351.2	99.9
0°-90°	2352.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2352.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3790	
5°	3737	353
15°	3245	893
25°	1798	802
35°	351	251
45°	52	44
55°	9	9
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P746279

CATALOG NUMBER: LD4D30D010-EU4DR5020359024-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3790.5
2.5°	3771.7
5°	3736.6
7.5°	3682.9
10°	3633.0
12.5°	3473.2
15°	3244.7
17.5°	2954.5
20°	2626.6
22.5°	2247.3
25°	1798.3
27.5°	1322.1
30°	909.5
32.5°	592.2
35°	350.6
37.5°	201.3
40°	121.8
42.5°	79.2
45°	51.5
47.5°	31.3
50°	19.2
52.5°	13.1
55°	8.9
57.5°	6.1
60°	3.8
62.5°	2.2
65°	1.0
67.5°	0.3
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)