

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746512

Luminaire Tested: LD4D30D010-EU4DR6520359024-4LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P746512
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR6520359024-4LBCSSQMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2056.1 lumens
Efficiency: N/A
Efficacy: 70.9 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P746512
CATALOG NUMBER: LD4D30D010-EU4DR6520359024-4LBCSSQMMS

Luminous Intensity Polar Plot

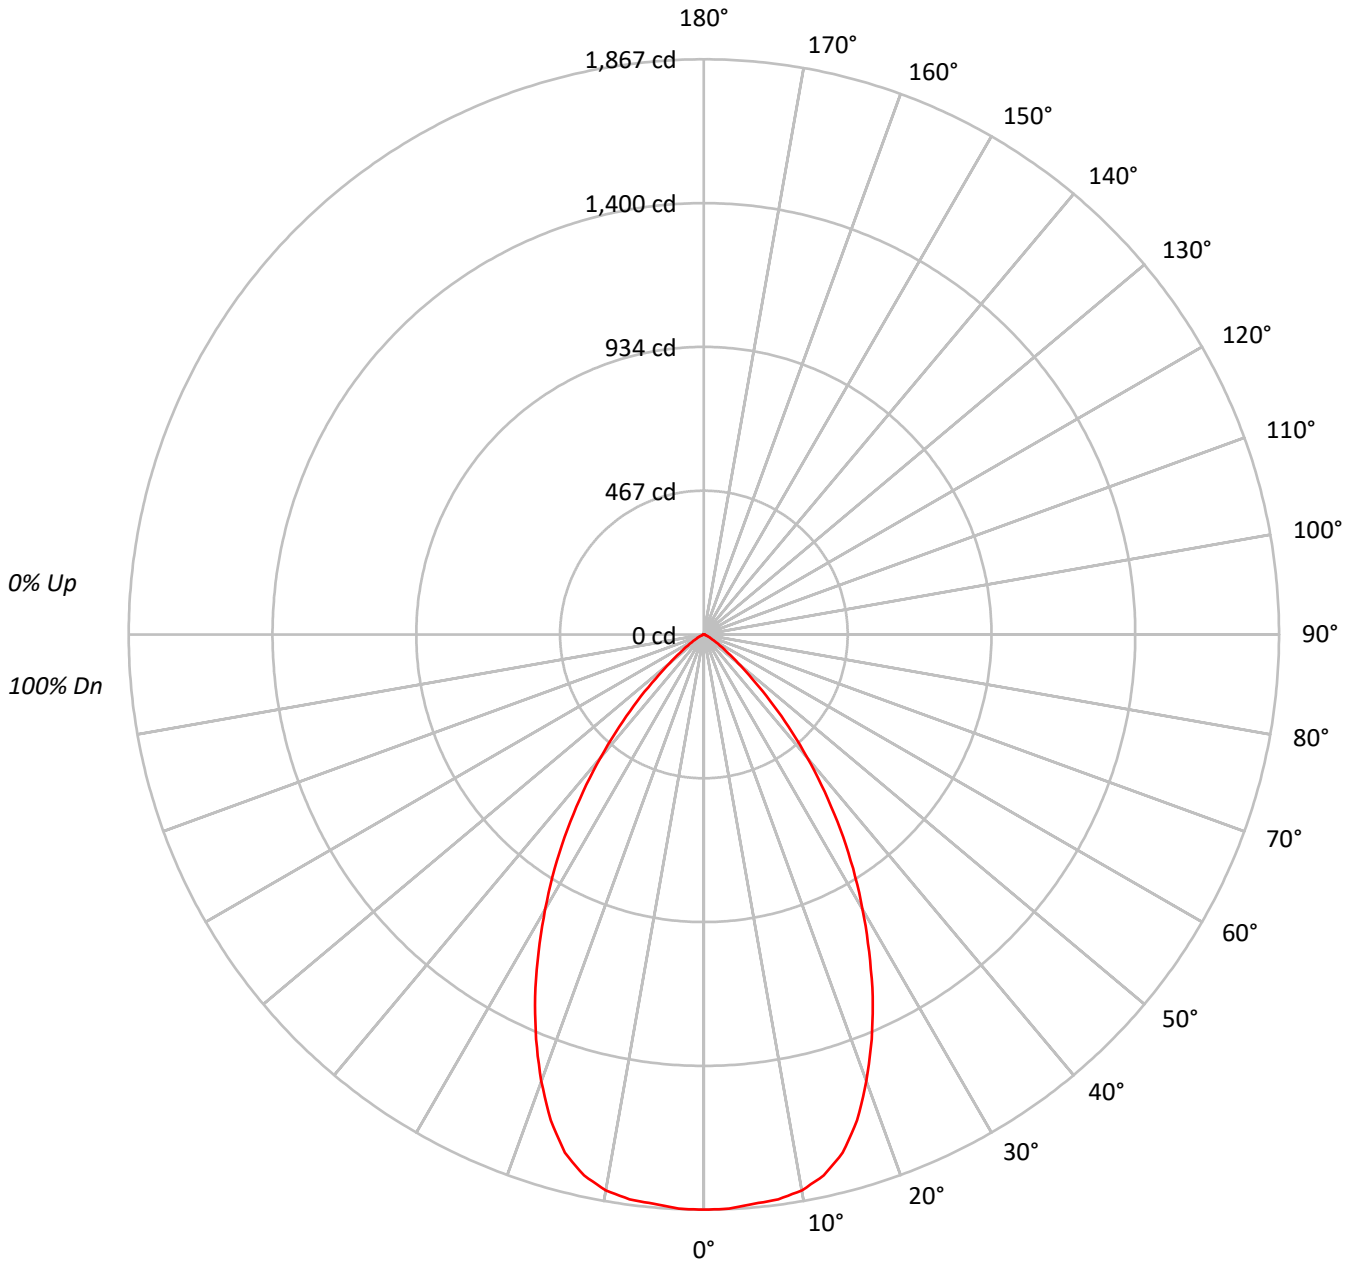



TEST NUMBER: P746512

CATALOG NUMBER: LD4D30D010-EU4DR6520359024-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	109028
5°	108753
10°	108664
15°	105316
20°	95876
25°	83548
30°	69489
35°	55056
40°	39737
45°	25109
50°	13084
55°	6955
60°	3656
65°	2018
70°	837
75°	925
80°	639
85°	536

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 25109 cd/sqm



TEST NUMBER: P746512

CATALOG NUMBER: LD4D30D010-EU4DR6520359024-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	176.5	8.6
10°-20°	483.5	23.5
20°-30°	590.9	28.7
30°-40°	479.5	23.3
40°-50°	238.9	11.6
50°-60°	66.6	3.2
60°-70°	15.2	0.7
70°-80°	3.9	0.2
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1250.9	60.8
0°-40°	1730.4	84.2
0°-60°	2036.0	99.0
0°-90°	2056.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2056.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1867	
5°	1855	177
15°	1742	483
25°	1296	591
35°	772	479
45°	304	239
55°	68	67
65°	15	15
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P746512

CATALOG NUMBER: LD4D30D010-EU4DR6520359024-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	1866.8
2.5°	1865.5
5°	1855.0
7.5°	1849.0
10°	1832.3
12.5°	1798.3
15°	1741.8
17.5°	1653.4
20°	1542.6
22.5°	1423.0
25°	1296.5
27.5°	1161.3
30°	1030.4
32.5°	901.2
35°	772.2
37.5°	643.6
40°	521.2
42.5°	406.6
45°	304.0
47.5°	211.8
50°	144.0
52.5°	99.3
55°	68.3
57.5°	46.1
60°	31.3
62.5°	21.7
65°	14.6
67.5°	7.4
70°	4.9
72.5°	4.6
75°	4.1
77.5°	2.8
80°	1.9
82.5°	1.4
85°	0.8
87.5°	0.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)