

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746251

Luminaire Tested: LD4D30D010-EU4DR4520359040-4LBCSSQMB

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P746251  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR4520359040-4LBCSSQMB  
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2853.6 lumens  
Efficiency: N/A  
Efficacy: 98.4 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P746251  
CATALOG NUMBER: LD4D30D010-EU4DR4520359040-4LBCSSQMB

### Luminous Intensity Polar Plot

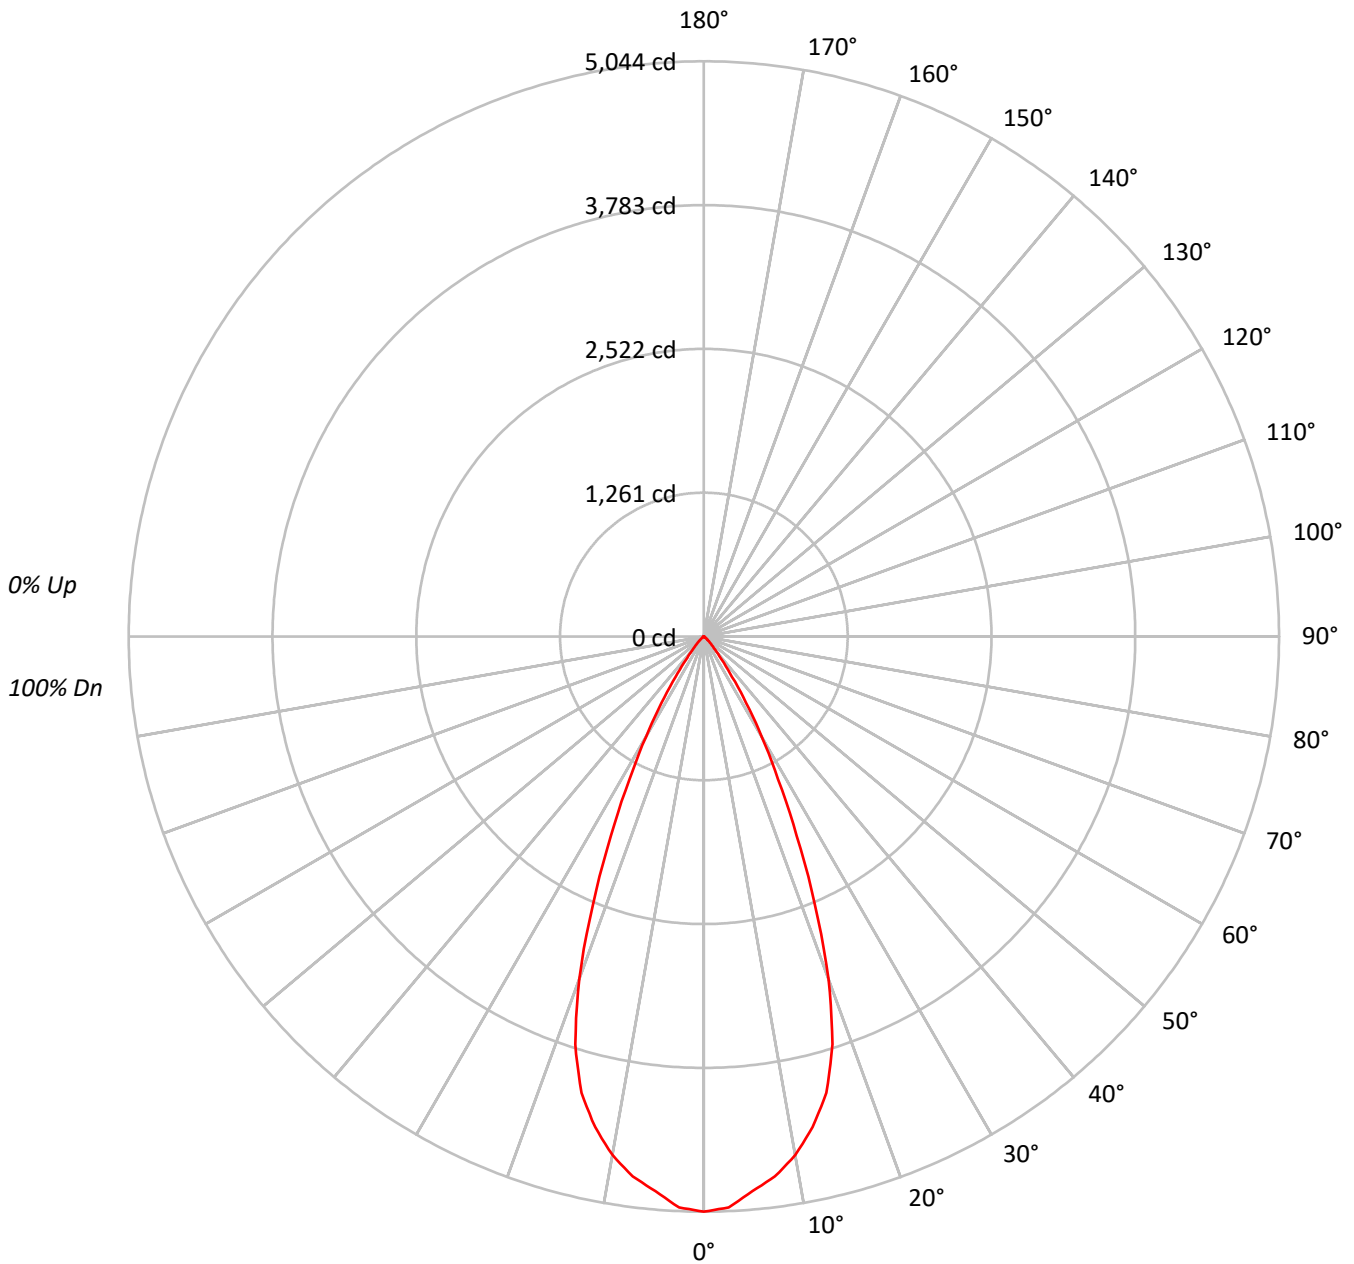



TEST NUMBER: P746251

CATALOG NUMBER: LD4D30D010-EU4DR4520359040-4LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100													
	1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95	95	95	95	95	95													
	2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90	90	90	90	90	90													
	3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85	85	85													
	4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81	81	81													
	5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77	77	77	77	77	77													
	6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73	73	73	73	73	73													
	7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69	69	69	69	69	69													
	8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66	66	66	66	66	66													
	9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63	63	63	63	63	63													
	10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60	60	60	60	60	60													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	551089
5°	535394
10°	512239
15°	468794
20°	371922
25°	232191
30°	127980
35°	57461
40°	22635
45°	10662
50°	5048
55°	2648
60°	1311
65°	310
70°	128
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 10662 cd/sqm



TEST NUMBER: P746251

CATALOG NUMBER: LD4D30D010-EU4DR4520359040-4LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	458.7	16.1
10°-20°	1128.8	39.6
20°-30°	893.9	31.3
30°-40°	297.7	10.4
40°-50°	59.1	2.1
50°-60°	13.4	0.5
60°-70°	1.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2481.4	87.0
0°-40°	2779.1	97.4
0°-60°	2851.6	99.9
0°-90°	2853.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2853.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5044	
5°	4882	459
15°	4144	1129
25°	1926	894
35°	431	298
45°	69	59
55°	14	13
65°	1	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P746251

CATALOG NUMBER: LD4D30D010-EU4DR4520359040-4LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5043.8
2.5°	5010.9
5°	4881.5
7.5°	4774.9
10°	4617.0
12.5°	4406.7
15°	4144.4
17.5°	3750.1
20°	3198.7
22.5°	2541.7
25°	1926.0
27.5°	1410.3
30°	1014.4
32.5°	689.9
35°	430.8
37.5°	255.5
40°	158.7
42.5°	104.3
45°	69.0
47.5°	44.4
50°	29.7
52.5°	19.8
55°	13.9
57.5°	9.1
60°	6.0
62.5°	3.2
65°	1.2
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)