

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746509

Luminaire Tested: LD4D30D010-EU4DR6020359050-4LBSQW1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P746509
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR6020359050-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2297.7 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P746509

CATALOG NUMBER: LD4D30D010-EU4DR6020359050-4LBSQW1B

Luminous Intensity Polar Plot

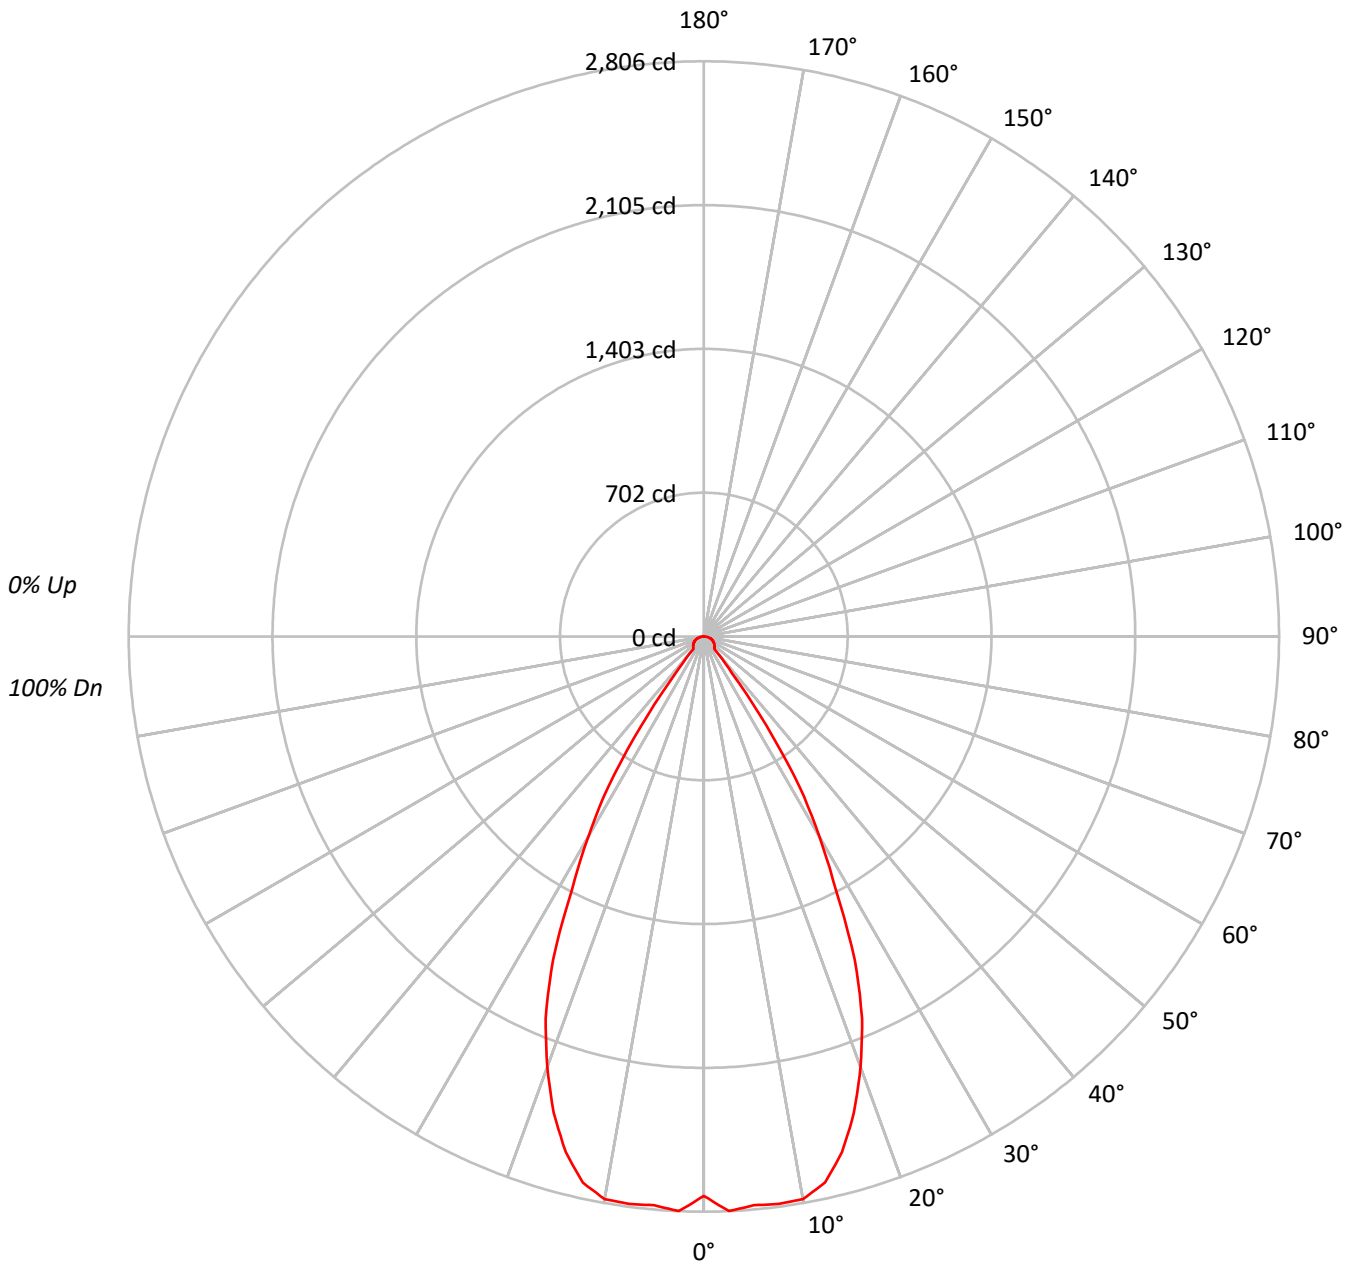



TEST NUMBER: P746509

CATALOG NUMBER: LD4D30D010-EU4DR6020359050-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	298140
5°	305475
10°	309163
15°	294518
20°	259684
25°	210032
30°	142073
35°	71200
40°	11553
45°	11311
50°	11525
55°	11696
60°	12041
65°	12306
70°	12587
75°	12749
80°	12270
85°	10280

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 12749 cd/sqm



TEST NUMBER: P746509

CATALOG NUMBER: LD4D30D010-EU4DR6020359050-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	266.2	11.6
10°-20°	720.2	31.3
20°-30°	774.9	33.7
30°-40°	336.8	14.7
40°-50°	56.6	2.5
50°-60°	55.0	2.4
60°-70°	47.1	2.0
70°-80°	31.5	1.4
80°-90°	9.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1761.3	76.7
0°-40°	2098.1	91.3
0°-60°	2209.7	96.2
0°-90°	2297.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2297.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2729	
5°	2785	266
15°	2604	720
25°	1742	775
35°	534	337
45°	73	57
55°	61	55
65°	48	47
75°	30	31
85°	8	9
90°	0	



TEST NUMBER: P746509

CATALOG NUMBER: LD4D30D010-EU4DR6020359050-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	2728.7
2.5°	2805.5
5°	2785.2
7.5°	2791.6
10°	2786.6
12.5°	2729.1
15°	2603.7
17.5°	2435.4
20°	2233.4
22.5°	2017.1
25°	1742.2
27.5°	1393.5
30°	1126.1
32.5°	867.9
35°	533.8
37.5°	228.3
40°	81.0
42.5°	74.6
45°	73.2
47.5°	70.6
50°	67.8
52.5°	64.6
55°	61.4
57.5°	58.2
60°	55.1
62.5°	51.5
65°	47.6
67.5°	43.7
70°	39.4
72.5°	34.8
75°	30.2
77.5°	24.9
80°	19.5
82.5°	13.9
85°	8.2
87.5°	2.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)