

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747316

Luminaire Tested: LD4D35BD010-EU4DR6520359027-4LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P747316
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D35BD010-EU4DR6520359027-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2445.2 lumens
Efficiency: N/A
Efficacy: 79.4 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 30.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P747316
CATALOG NUMBER: LD4D35BD010-EU4DR6520359027-4LBSQW1MW

Luminous Intensity Polar Plot

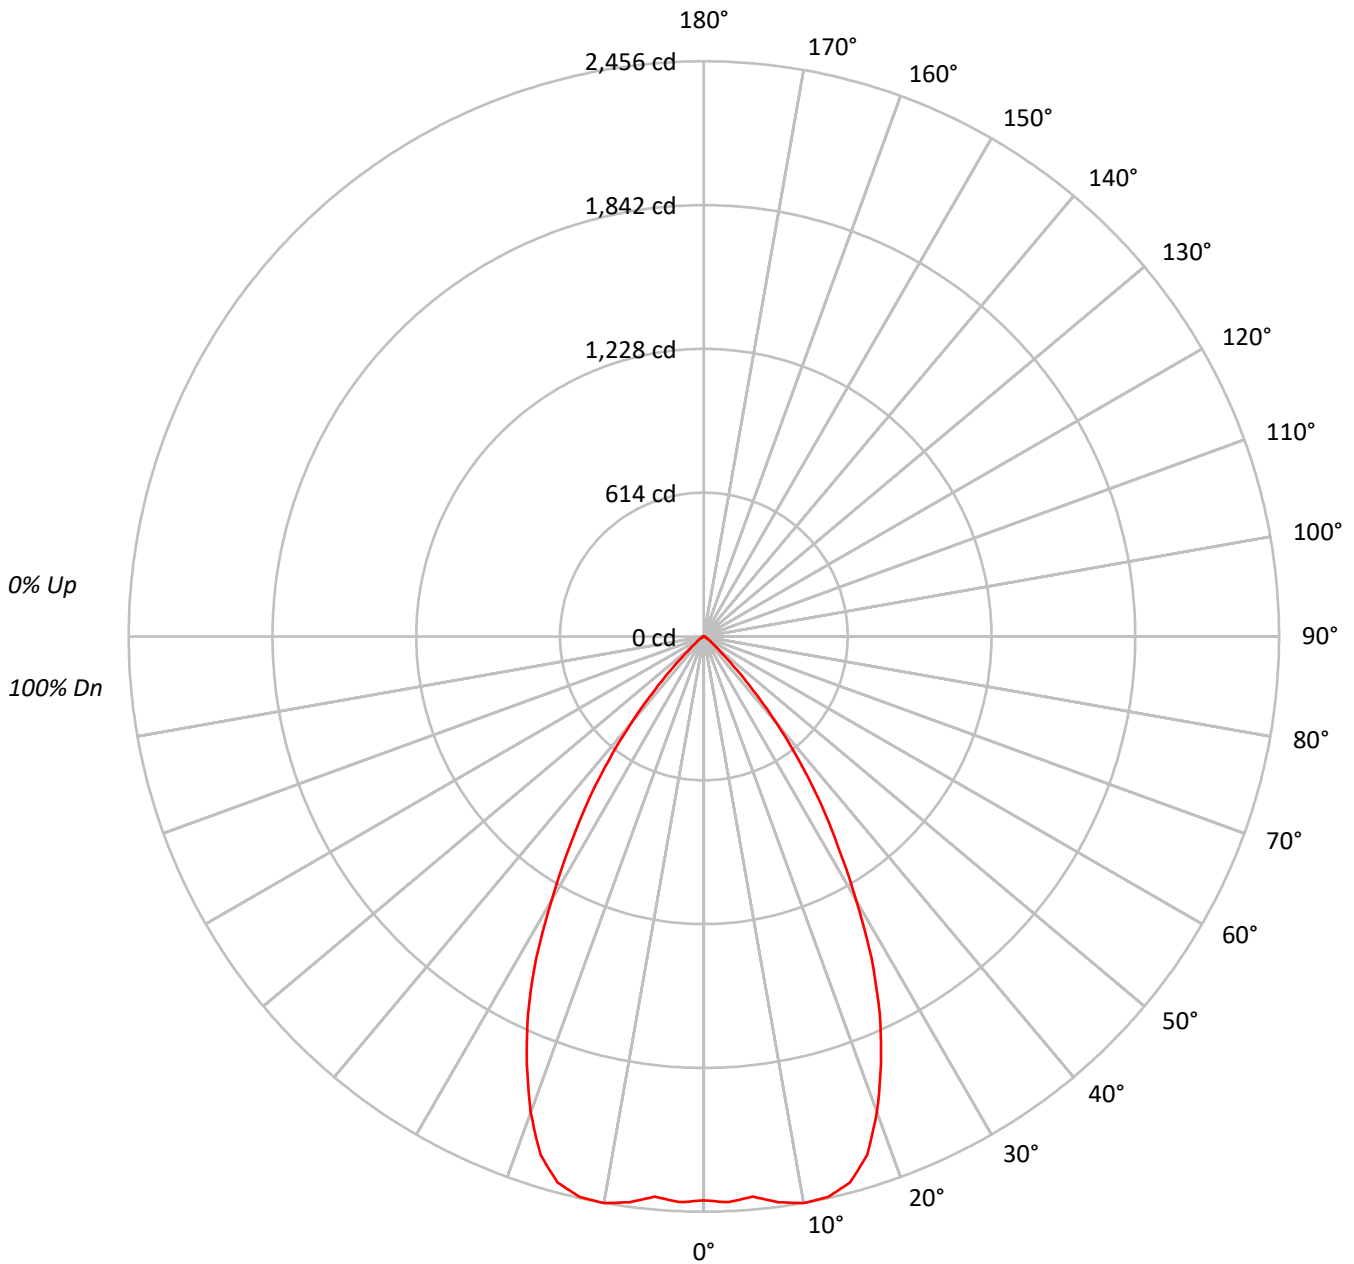



TEST NUMBER: P747316
 CATALOG NUMBER: LD4D35BD010-EU4DR6520359027-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 |
| RCR | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | |
| 1 | 113 | 111 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 103 | 101 | 101 | 99 | 98 | 97 | 96 | 95 | 93 | |
| 2 | 108 | 103 | 99 | 95 | 106 | 101 | 97 | 94 | 98 | 95 | 92 | 95 | 92 | 90 | 92 | 90 | 88 | 87 | |
| 3 | 102 | 96 | 91 | 87 | 100 | 94 | 90 | 86 | 92 | 88 | 85 | 89 | 86 | 83 | 87 | 84 | 82 | 80 | |
| 4 | 97 | 89 | 84 | 79 | 95 | 88 | 83 | 79 | 86 | 82 | 78 | 84 | 80 | 77 | 82 | 79 | 76 | 75 | |
| 5 | 92 | 83 | 78 | 73 | 90 | 83 | 77 | 73 | 81 | 76 | 72 | 79 | 75 | 72 | 77 | 74 | 71 | 69 | |
| 6 | 87 | 78 | 72 | 68 | 86 | 77 | 72 | 68 | 76 | 71 | 67 | 74 | 70 | 67 | 73 | 69 | 66 | 65 | |
| 7 | 83 | 73 | 67 | 63 | 81 | 73 | 67 | 63 | 71 | 66 | 62 | 70 | 66 | 62 | 69 | 65 | 62 | 60 | |
| 8 | 79 | 69 | 63 | 59 | 77 | 68 | 63 | 59 | 67 | 62 | 58 | 66 | 62 | 58 | 65 | 61 | 58 | 57 | |
| 9 | 75 | 65 | 59 | 55 | 74 | 65 | 59 | 55 | 64 | 58 | 55 | 63 | 58 | 55 | 62 | 58 | 54 | 53 | |
| 10 | 71 | 61 | 56 | 52 | 70 | 61 | 55 | 52 | 60 | 55 | 51 | 59 | 55 | 51 | 59 | 54 | 51 | 50 | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 263045 |
| 5° | 263260 |
| 10° | 272528 |
| 15° | 272981 |
| 20° | 251324 |
| 25° | 214143 |
| 30° | 163937 |
| 35° | 115816 |
| 40° | 68362 |
| 45° | 27751 |
| 50° | 10063 |
| 55° | 5600 |
| 60° | 3212 |
| 65° | 1758 |
| 70° | 1853 |
| 75° | 1435 |
| 80° | 1510 |
| 85° | 1254 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 27751 cd/sqm



TEST NUMBER: P747316

CATALOG NUMBER: LD4D35BD010-EU4DR6520359027-4LBSQW1MW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 231.8 | 9.5 |
| 10°-20° | 668.7 | 27.3 |
| 20°-30° | 802.3 | 32.8 |
| 30°-40° | 539.2 | 22.1 |
| 40°-50° | 161.4 | 6.6 |
| 50°-60° | 28.5 | 1.2 |
| 60°-70° | 8.1 | 0.3 |
| 70°-80° | 4.0 | 0.2 |
| 80°-90° | 1.3 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1702.8 | 69.6 |
| 0°-40° | 2242.0 | 91.7 |
| 0°-60° | 2431.9 | 99.5 |
| 0°-90° | 2445.2 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 2445.2 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 2408 | |
| 5° | 2400 | 232 |
| 15° | 2413 | 669 |
| 25° | 1776 | 802 |
| 35° | 868 | 539 |
| 45° | 180 | 161 |
| 55° | 29 | 28 |
| 65° | 7 | 8 |
| 75° | 3 | 4 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P747316

CATALOG NUMBER: LD4D35BD010-EU4DR6520359027-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 2407.5 |
| 2.5° | 2417.8 |
| 5° | 2400.3 |
| 7.5° | 2436.6 |
| 10° | 2456.4 |
| 12.5° | 2451.6 |
| 15° | 2413.3 |
| 17.5° | 2319.6 |
| 20° | 2161.5 |
| 22.5° | 1975.4 |
| 25° | 1776.3 |
| 27.5° | 1551.5 |
| 30° | 1299.4 |
| 32.5° | 1070.8 |
| 35° | 868.3 |
| 37.5° | 668.2 |
| 40° | 479.3 |
| 42.5° | 313.0 |
| 45° | 179.6 |
| 47.5° | 95.1 |
| 50° | 59.2 |
| 52.5° | 41.1 |
| 55° | 29.4 |
| 57.5° | 21.2 |
| 60° | 14.7 |
| 62.5° | 9.6 |
| 65° | 6.8 |
| 67.5° | 6.2 |
| 70° | 5.8 |
| 72.5° | 4.4 |
| 75° | 3.4 |
| 77.5° | 3.1 |
| 80° | 2.4 |
| 82.5° | 1.7 |
| 85° | 1.0 |
| 87.5° | 0.7 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)