

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P747563

Luminaire Tested: LD4D40BD010-EU4DR3040509030-4LBSQW1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P747563
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D40BD010-EU4DR3040509030-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3088.6 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 35.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P747563
CATALOG NUMBER: LD4D40BD010-EU4DR3040509030-4LBSQW1MW

Luminous Intensity Polar Plot

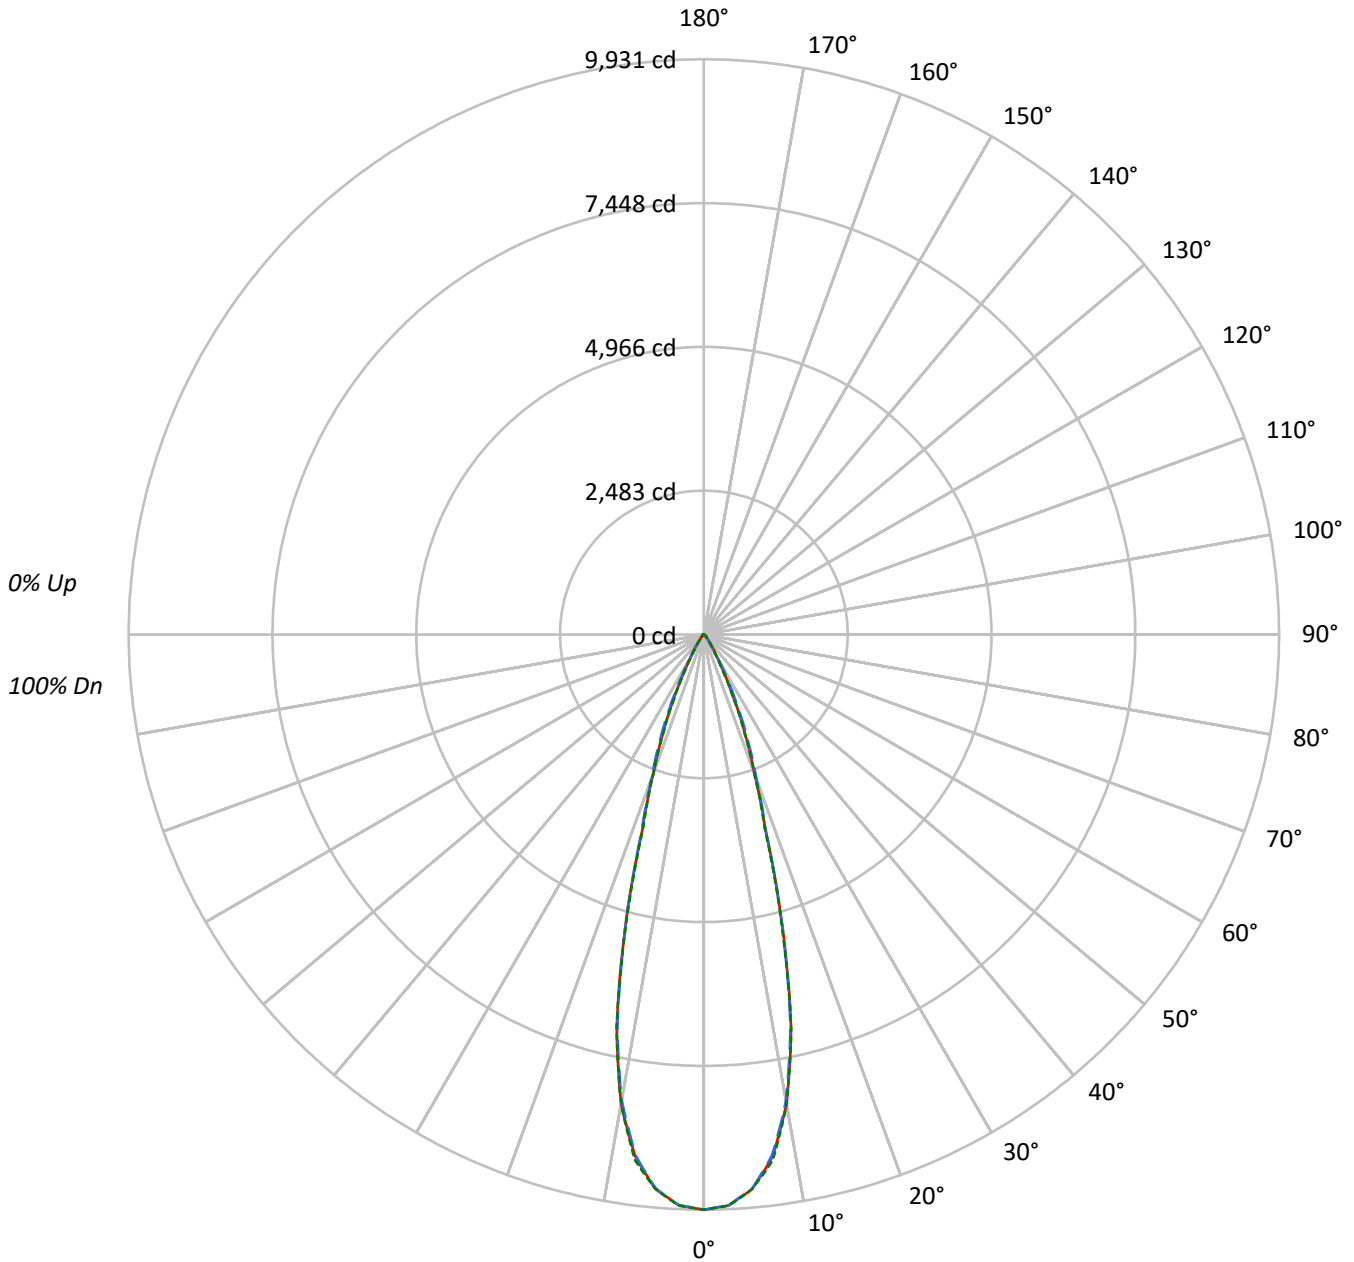



TEST NUMBER: P747563

CATALOG NUMBER: LD4D40BD010-EU4DR3040509030-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	760175	760175	760175
5°	738353	737493	738392
10°	639522	635014	639375
15°	417257	415014	412930
20°	207484	215271	207207
25°	104515	117859	102378
30°	41850	45598	36459
35°	19408	18586	15586
40°	8383	9303	7894
45°	5910	7339	5965
50°	2036	5347	2143
55°	1174	2215	1241
60°	827	964	827
65°	525	525	525
70°	336	224	336
75°	0	148	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 7339 cd/sqm



TEST NUMBER: P747563

CATALOG NUMBER: LD4D40BD010-EU4DR3040509030-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	873.3	28.3
10°-20°	1406.5	45.5
20°-30°	607.8	19.7
30°-40°	138.5	4.5
40°-50°	47.6	1.5
50°-60°	11.6	0.4
60°-70°	3.0	0.1
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2887.5	93.5
0°-40°	3026.1	98.0
0°-60°	3085.3	99.9
0°-90°	3088.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3088.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	9931	9931	9931	9931	9931	
5°	9610	9600	9598	9618	9610	874
15°	5266	5202	5237	5220	5211	1410
25°	1238	1284	1396	1252	1212	592
35°	208	212	199	198	167	141
45°	55	68	68	68	55	39
55°	9	9	17	10	9	9
65°	3	3	3	3	3	3
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P747563

CATALOG NUMBER: LD4D40BD010-EU4DR3040509030-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	9931.3	9931.3	9931.3	9931.3	9931.3
2.5°	9865.5	9858.7	9862.6	9867.4	9869.4
5°	9609.5	9600.2	9598.3	9618.3	9610.0
7.5°	9093.1	9080.0	9060.0	9105.3	9147.7
10°	8228.1	8213.5	8170.1	8191.6	8226.2
12.5°	6951.1	6903.8	6902.9	6971.1	6961.9
15°	5265.5	5202.1	5237.2	5220.2	5210.9
17.5°	3540.9	3516.5	3563.3	3549.2	3488.2
20°	2547.2	2553.5	2642.8	2597.9	2543.8
22.5°	1858.7	1881.6	1987.4	1871.9	1829.5
25°	1237.5	1284.3	1395.5	1251.7	1212.2
27.5°	761.1	782.6	895.2	751.4	729.9
30°	473.5	462.7	515.9	442.7	412.5
32.5°	310.6	296.9	314.0	281.8	257.4
35°	207.7	212.1	198.9	197.5	166.8
37.5°	129.7	149.2	131.7	140.4	107.3
40°	83.9	108.2	93.1	102.9	79.0
42.5°	68.8	83.4	76.6	81.4	70.2
45°	54.6	67.8	67.8	67.8	55.1
47.5°	30.2	45.3	58.0	46.3	32.2
50°	17.1	22.9	44.9	23.9	18.0
52.5°	11.7	13.2	30.7	13.7	12.2
55°	8.8	9.3	16.6	9.8	9.3
57.5°	6.8	7.3	8.8	7.3	6.8
60°	5.4	5.4	6.3	5.9	5.4
62.5°	3.9	3.9	4.4	3.9	3.9
65°	2.9	2.9	2.9	2.9	2.9
67.5°	1.5	2.0	2.0	2.0	2.0
70°	1.5	1.0	1.0	1.0	1.5
72.5°	1.0	0.5	0.5	0.5	0.5
75°	0.0	0.0	0.5	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)