

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748476

Luminaire Tested: LD4D45BD010-EU4DR4040509027-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P748476  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D45BD010-EU4DR4040509027-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 40° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3953.2 lumens  
Efficiency: N/A  
Efficacy: 102.1 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P748476

CATALOG NUMBER: LD4D45BD010-EU4DR4040509027-4LBCSSQMW

### Luminous Intensity Polar Plot

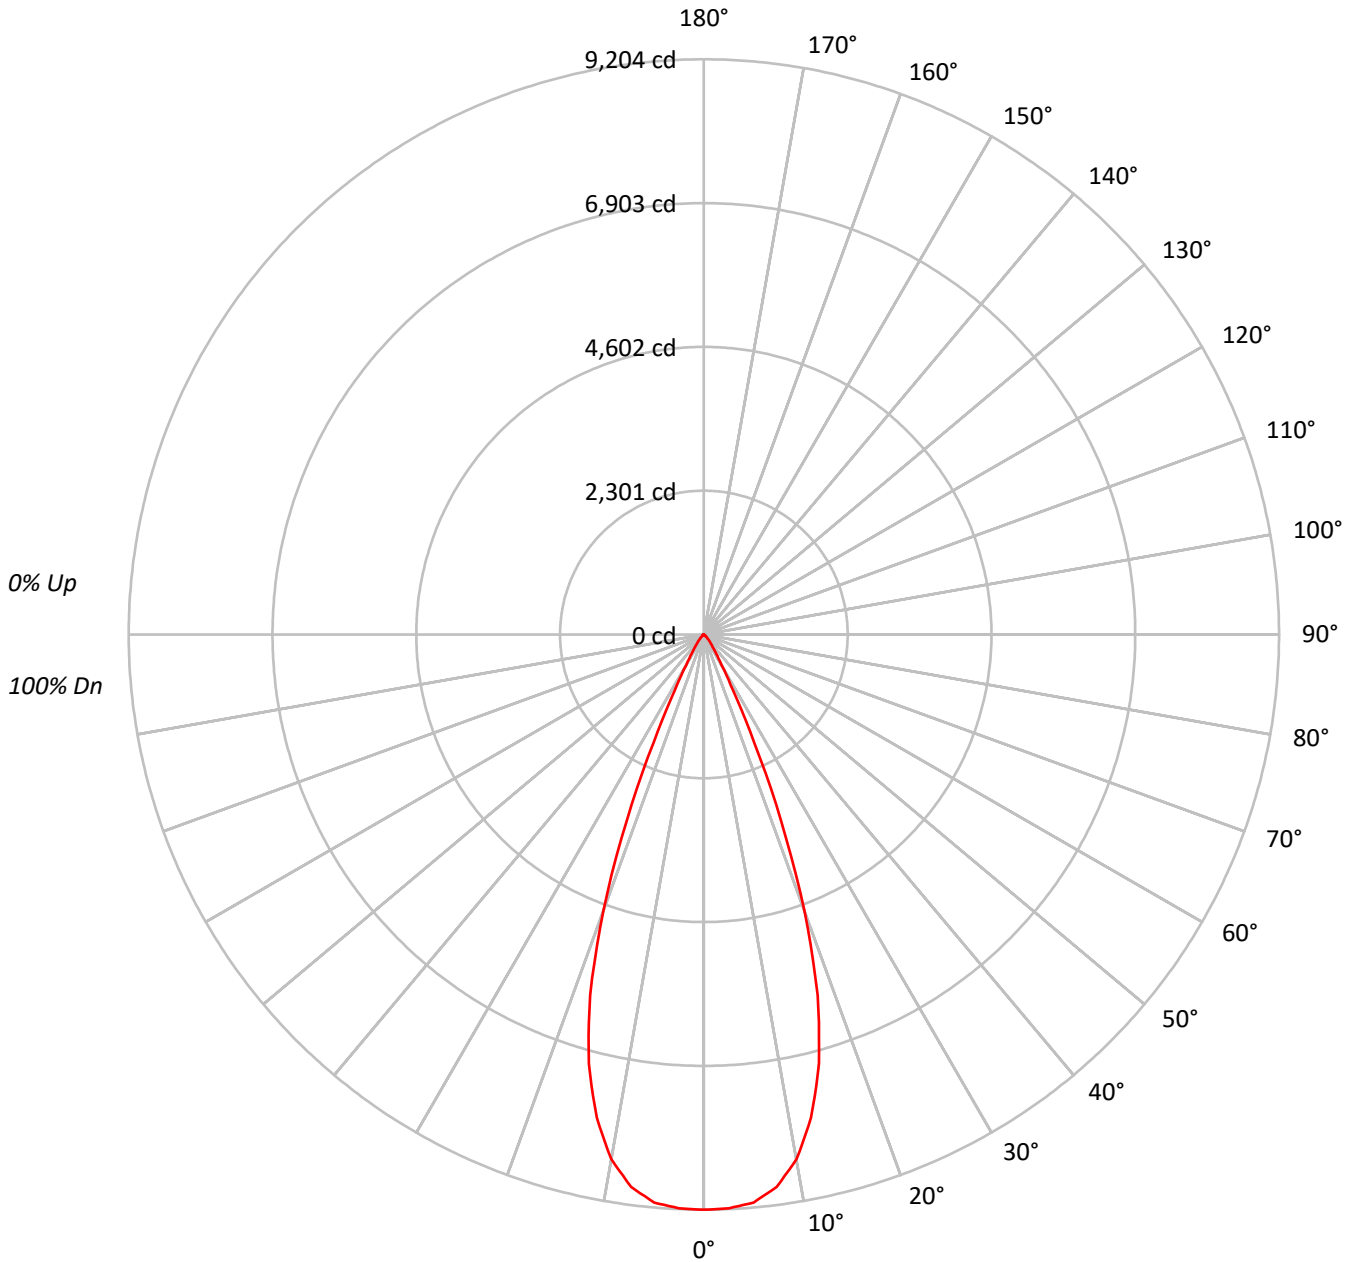



TEST NUMBER: P748476

CATALOG NUMBER: LD4D45BD010-EU4DR4040509027-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96			96																
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92																
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88			88																
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84			84																
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81			81																
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77			77																
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74			74																
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72			72																
9	86	79	74	71	85	78	74	71	77	73	71	77	73	70	76	72	70	69			69																
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67			67																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1005647
5°	1000769
10°	945939
15°	804169
20°	548099
25°	228695
30°	71901
35°	33426
40°	18485
45°	8468
50°	4114
55°	2248
60°	1180
65°	414
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8468 cd/sqm



TEST NUMBER: P748476

CATALOG NUMBER: LD4D45BD010-EU4DR4040509027-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	852.0	21.6
10°-20°	1908.7	48.3
20°-30°	955.4	24.2
30°-40°	175.2	4.4
40°-50°	48.3	1.2
50°-60°	11.3	0.3
60°-70°	2.2	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3716.2	94.0
0°-40°	3891.3	98.4
0°-60°	3951.0	99.9
0°-90°	3953.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3953.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9204	
5°	9125	852
15°	7109	1909
25°	1897	955
35°	251	175
45°	55	48
55°	12	11
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P748476

CATALOG NUMBER: LD4D45BD010-EU4DR4040509027-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	9204.1
2.5°	9190.7
5°	9124.6
7.5°	8913.8
10°	8526.1
12.5°	7921.8
15°	7109.3
17.5°	6052.8
20°	4713.9
22.5°	3213.8
25°	1897.0
27.5°	1002.8
30°	569.9
32.5°	368.3
35°	250.6
37.5°	179.1
40°	129.6
42.5°	88.7
45°	54.8
47.5°	34.9
50°	24.2
52.5°	17.2
55°	11.8
57.5°	7.5
60°	5.4
62.5°	3.2
65°	1.6
67.5°	1.1
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)