

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748253

Luminaire Tested: LD4D45BD010-EU4DR2540509030-4LBCSSQMB

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P748253  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D45BD010-EU4DR2540509030-4LBCSSQMB  
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3386.7 lumens  
Efficiency: N/A  
Efficacy: 87.5 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P748253

CATALOG NUMBER: LD4D45BD010-EU4DR2540509030-4LBCSSQMB

### Luminous Intensity Polar Plot

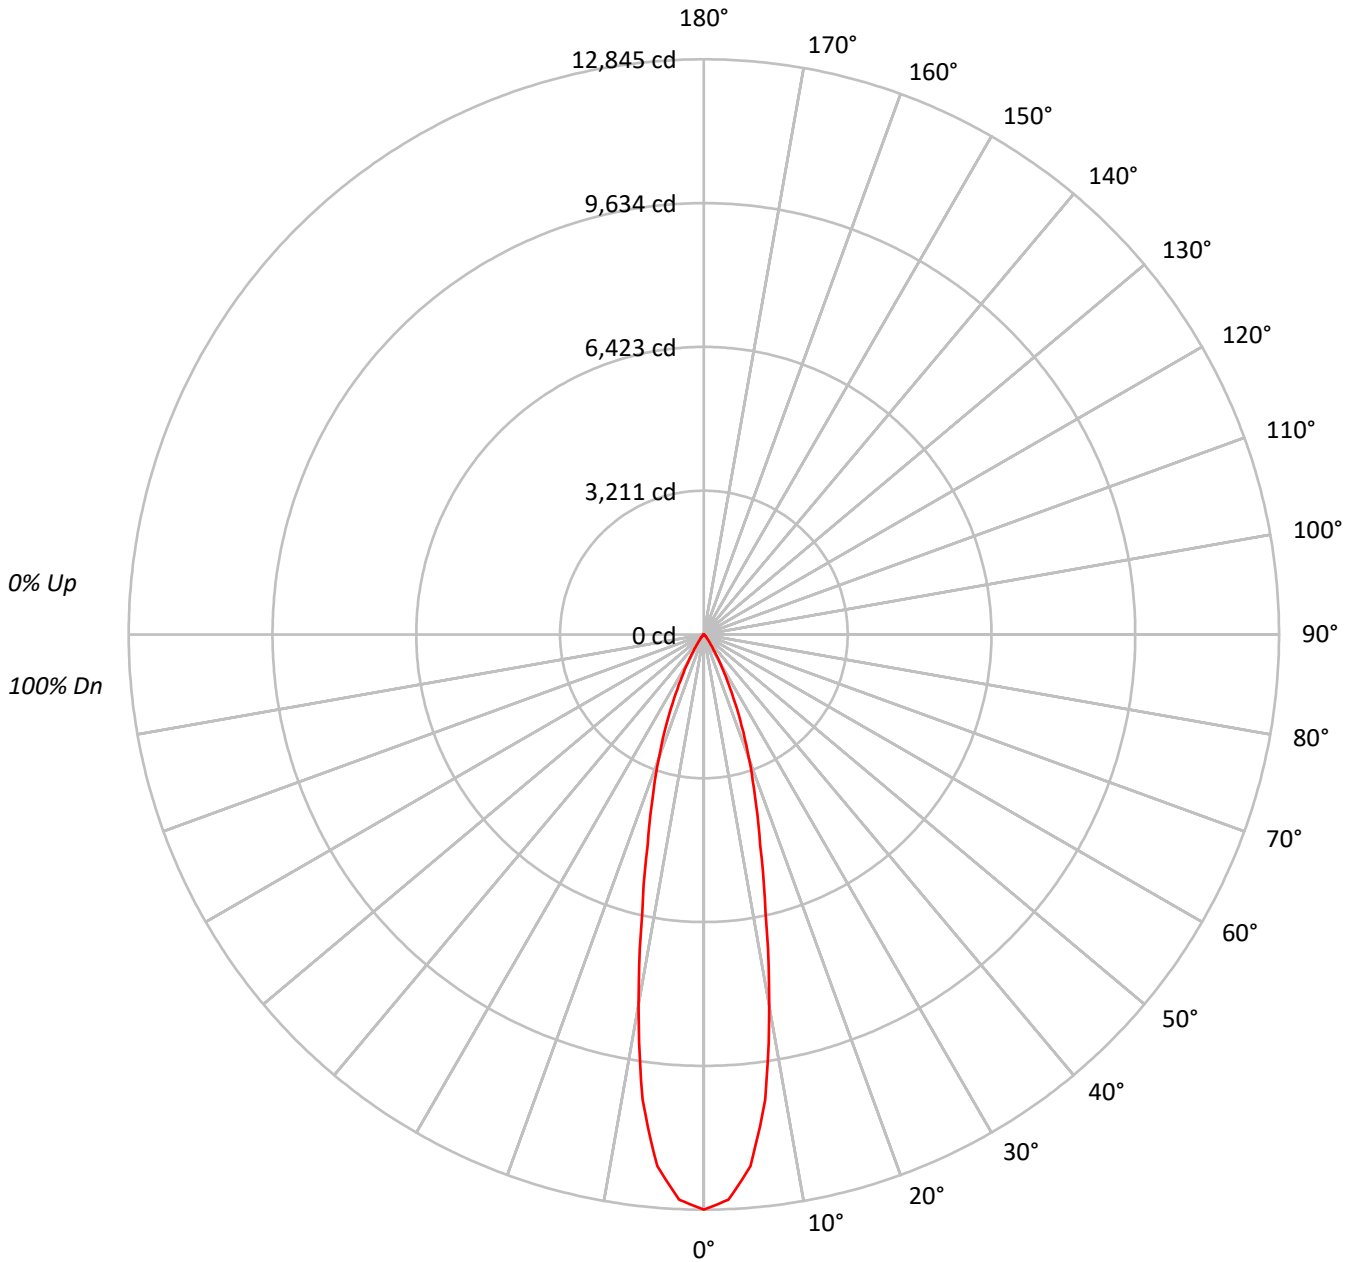



TEST NUMBER: P748253

CATALOG NUMBER: LD4D45BD010-EU4DR2540509030-4LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																	
	1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96	96	96	96	96	96	96	96	96	96	96																	
	2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92	92	92	92	92	92	92	92	92	92	92	92																
	3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89	89	89	89	89	89	89	89	89	89	89	89																
	4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85	85	85	85	85	85	85	85	85	85	85	85																
	5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82	82	82	82	82	82	82	82	82	82	82	82																
	6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79	79	79	79	79	79	79	79	79	79	79	79																
	7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77	77	77	77	77	77	77	77	77	77	77	77																
	8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74	74	74	74	74	74	74	74	74	74	74	74																
	9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72	72	72	72	72	72	72	72	72	72	72	72																
	10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69	69	69	69	69	69	69	69	69	69	69	69																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1403443
5°	1307133
10°	932415
15°	549151
20°	341691
25°	187525
30°	85753
35°	32479
40°	14705
45°	8838
50°	3672
55°	2362
60°	1661
65°	1112
70°	160
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8838 cd/sqm



TEST NUMBER: P748253

CATALOG NUMBER: LD4D45BD010-EU4DR2540509030-4LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1024.2	30.2
10°-20°	1387.3	41.0
20°-30°	734.1	21.7
30°-40°	181.2	5.4
40°-50°	44.2	1.3
50°-60°	11.6	0.3
60°-70°	3.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3145.6	92.9
0°-40°	3326.9	98.2
0°-60°	3382.7	99.9
0°-90°	3386.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3386.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	12845	
5°	11918	###
15°	4855	1387
25°	1556	734
35°	244	181
45°	57	44
55°	12	12
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P748253

CATALOG NUMBER: LD4D45BD010-EU4DR2540509030-4LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	12844.9
2.5°	12633.8
5°	11917.9
7.5°	10479.6
10°	8404.2
12.5°	6353.1
15°	4854.8
17.5°	3783.7
20°	2938.7
22.5°	2203.9
25°	1555.5
27.5°	1043.1
30°	679.7
32.5°	413.6
35°	243.5
37.5°	149.0
40°	103.1
42.5°	78.8
45°	57.2
47.5°	34.6
50°	21.6
52.5°	15.7
55°	12.4
57.5°	9.7
60°	7.6
62.5°	5.9
65°	4.3
67.5°	1.6
70°	0.5
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)