

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P748957

Luminaire Tested: LD4D45BD010-EU4DR7040509030-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P748957  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D45BD010-EU4DR7040509030-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4131.7 lumens  
Efficiency: N/A  
Efficacy: 106.8 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P748957  
CATALOG NUMBER: LD4D45BD010-EU4DR7040509030-4LBCSSQMW

### Luminous Intensity Polar Plot

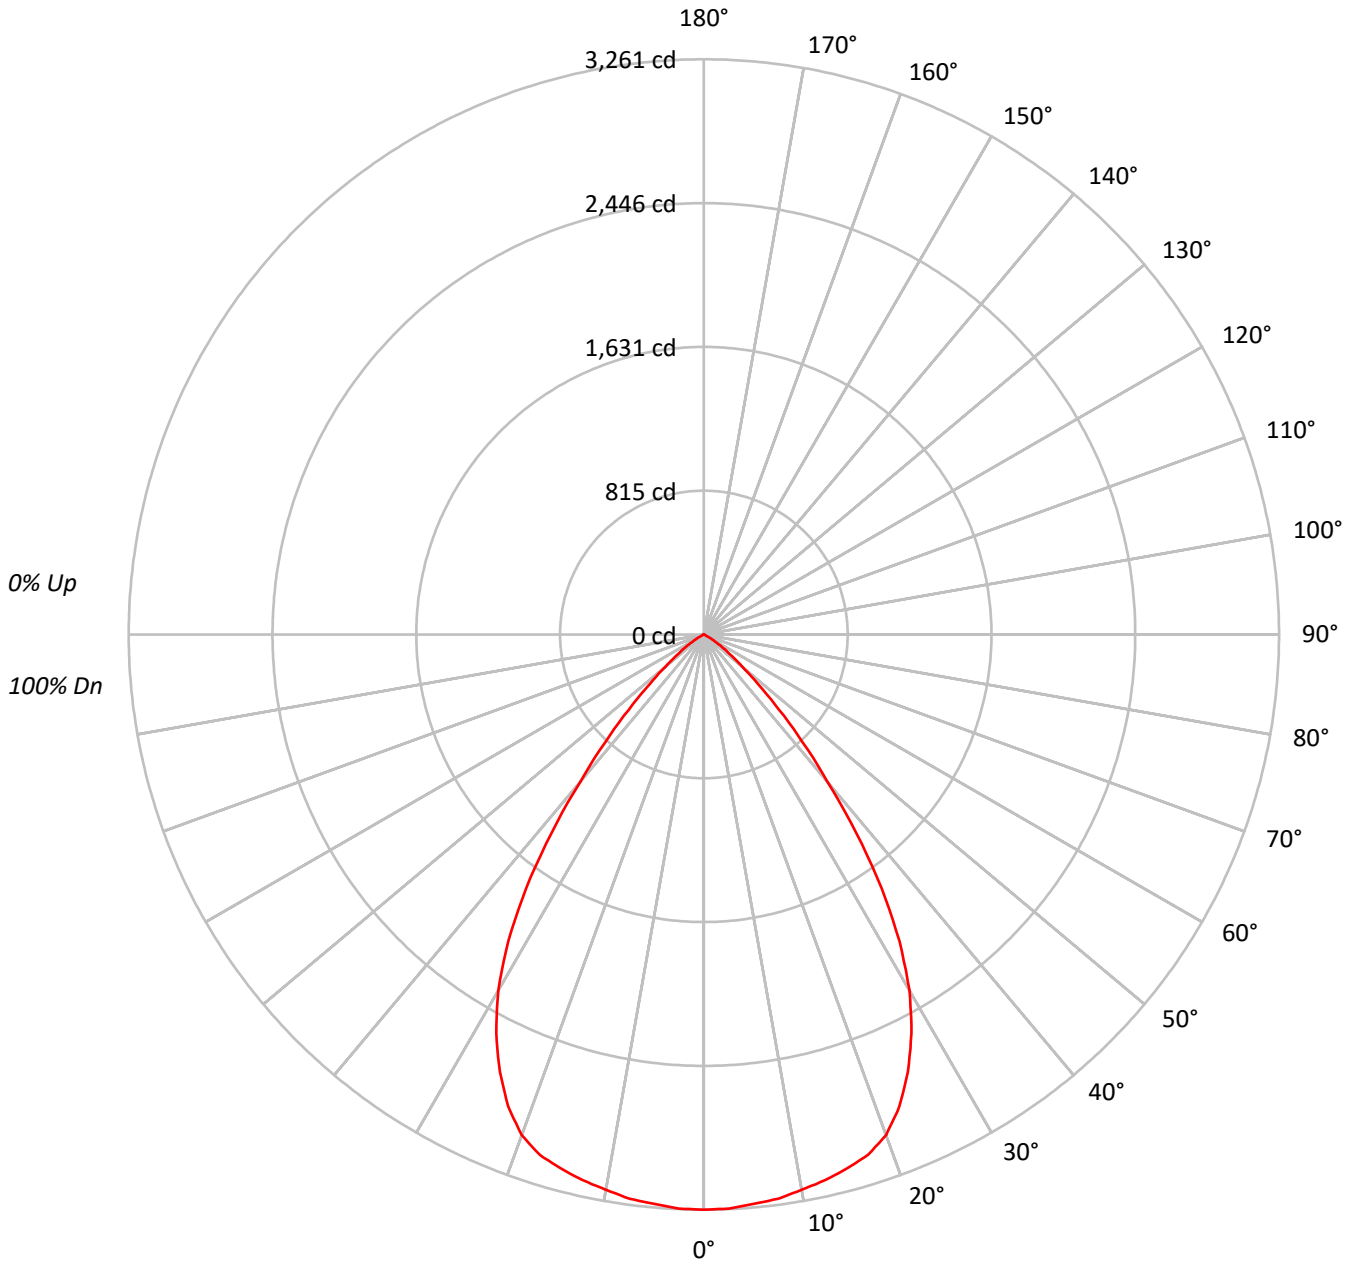



TEST NUMBER: P748957

CATALOG NUMBER: LD4D45BD010-EU4DR7040509030-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78				78															
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71				71															
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65				65															
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60				60															
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56				56															
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51				51															
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48				48															
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44				44															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	356310
5°	355423
10°	354651
15°	354548
20°	351086
25°	329805
30°	294011
35°	234420
40°	155652
45°	93066
50°	48240
55°	25354
60°	8959
65°	155
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 93066 cd/sqm



TEST NUMBER: P748957

CATALOG NUMBER: LD4D45BD010-EU4DR7040509030-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	308.2	7.5
10°-20°	883.9	21.4
20°-30°	1246.9	30.2
30°-40°	1076.4	26.1
40°-50°	482.0	11.7
50°-60°	126.2	3.1
60°-70°	8.2	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2438.9	59.0
0°-40°	3515.3	85.1
0°-60°	4123.5	99.8
0°-90°	4131.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4131.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3261	
5°	3241	308
15°	3134	884
25°	2736	1247
35°	1758	1076
45°	602	482
55°	133	126
65°	1	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P748957

CATALOG NUMBER: LD4D45BD010-EU4DR7040509030-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3261.1
2.5°	3257.6
5°	3240.6
7.5°	3226.5
10°	3196.6
12.5°	3169.6
15°	3134.4
17.5°	3094.0
20°	3019.5
22.5°	2896.9
25°	2735.7
27.5°	2548.6
30°	2330.4
32.5°	2063.6
35°	1757.5
37.5°	1419.7
40°	1091.3
42.5°	829.2
45°	602.3
47.5°	415.2
50°	283.8
52.5°	195.9
55°	133.1
57.5°	80.3
60°	41.0
62.5°	12.9
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)