

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739915

Luminaire Tested: LD4D05D010-EU4DR200210IC9024-4LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P739915
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR200210IC9024-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 549.0 lumens
Efficiency: N/A
Efficacy: 73.2 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739915
CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBCSSQMW

Luminous Intensity Polar Plot

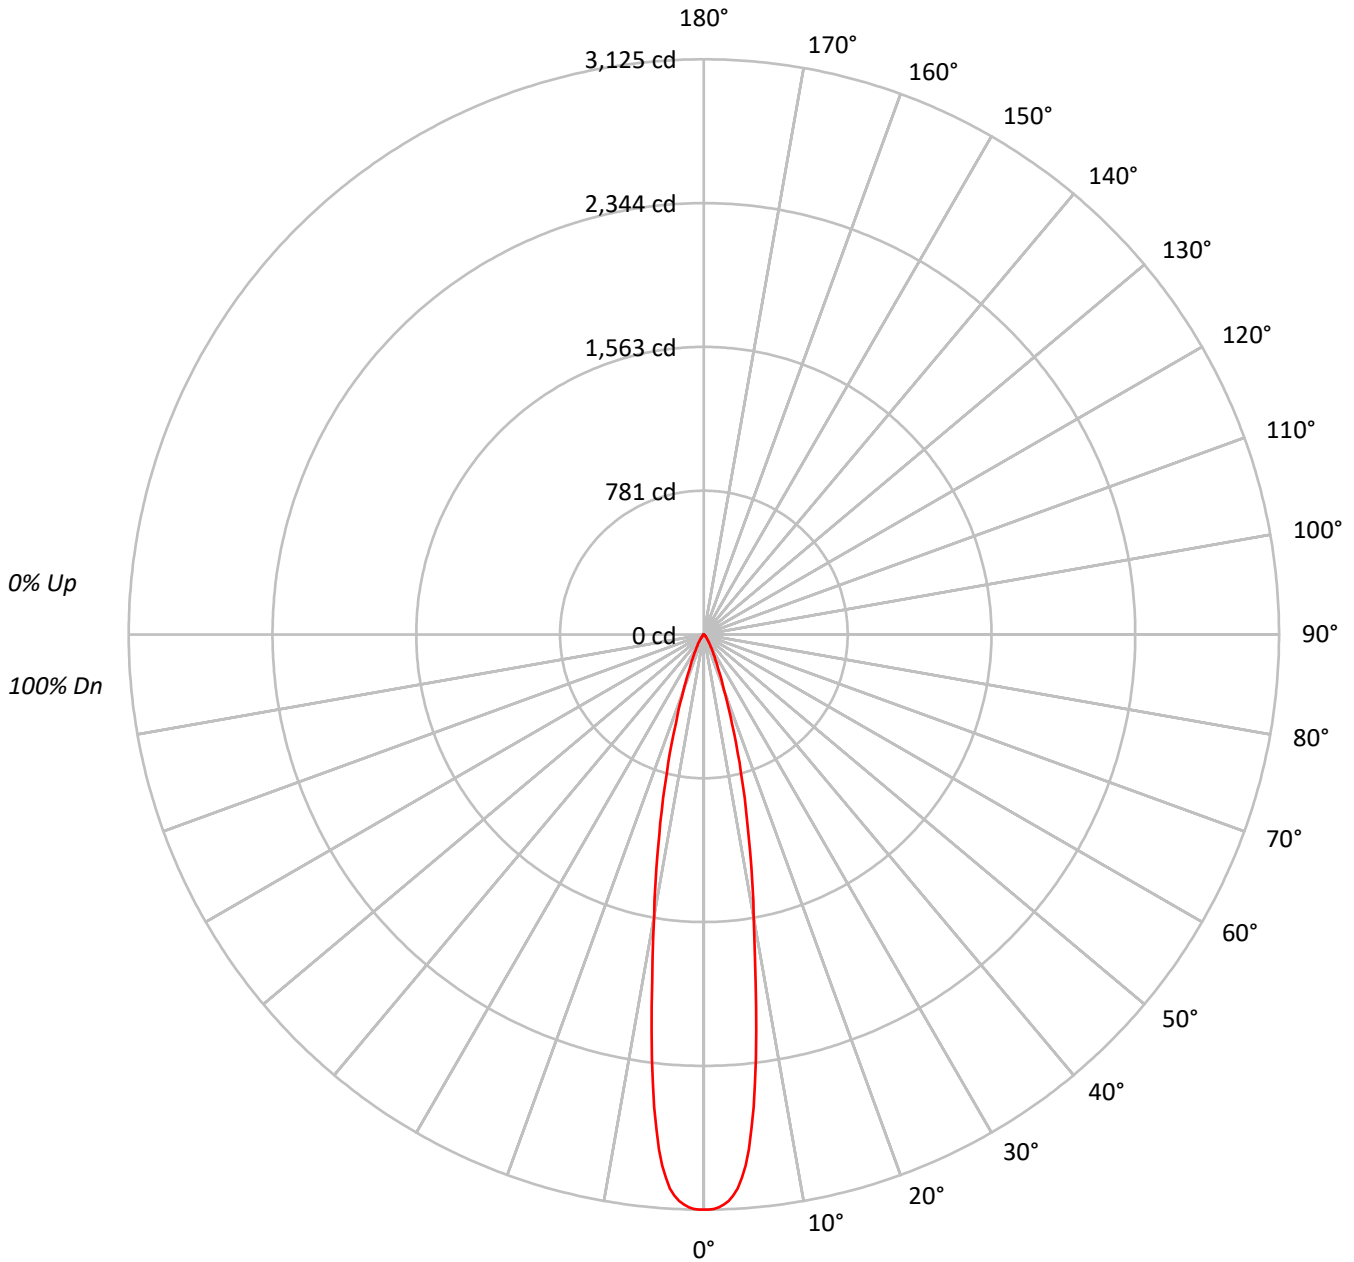



TEST NUMBER: P739915

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	100	99	98	97	98	96	95	94												
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	98	96	95	94	93	92	91	94												
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	98	96	95	94	93	92	91	94												
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	93	91	89	88	86	85	84	88												
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	91	88	86	85	84	83	82	85												
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	88	86	84	83	82	81	80	83												
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	86	84	82	81	80	79	78	81												
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	84	82	80	79	78	77	76	79												
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	82	80	78	77	76	75	74	77												
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	81	78	76	75	74	73	72	75												

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	341418
5°	308020
10°	172876
15°	87879
20°	37207
25°	17179
30°	9096
35°	4895
40°	2624
45°	1545
50°	901
55°	476
60°	306
65°	207
70°	96
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1545 cd/sqm



TEST NUMBER: P739915

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	222.5	40.5
10°-20°	219.1	39.9
20°-30°	71.6	13.0
30°-40°	24.4	4.4
40°-50°	8.2	1.5
50°-60°	2.4	0.4
60°-70°	0.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	513.1	93.5
0°-40°	537.5	97.9
0°-60°	548.2	99.8
0°-90°	549.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	549.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3125	
5°	2808	222
15°	777	219
25°	142	72
35°	37	24
45°	10	8
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P739915

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°
0°	3124.8
0.5°	3124.8
1°	3120.9
1.5°	3113.1
2°	3098.9
2.5°	3080.0
3°	3053.3
3.5°	3016.0
4°	2960.6
4.5°	2893.3
5°	2808.4
5.5°	2696.9
6°	2582.5
6.5°	2451.4
7°	2323.2
7.5°	2172.9
8°	2038.8
8.5°	1903.8
9°	1779.2
9.5°	1664.8
10°	1558.2
12.5°	1118.9
15°	776.9
17.5°	507.5
20°	320.0
22.5°	207.3
25°	142.5
27.5°	100.2
30°	72.1
32.5°	51.8
35°	36.7
37.5°	25.6
40°	18.4
42.5°	13.4
45°	10.0
47.5°	7.8
50°	5.3
52.5°	3.3
55°	2.5
57.5°	1.9
60°	1.4
62.5°	1.1
65°	0.8



TEST NUMBER: P739915

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBCSSQMW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		0.6
70°		0.3

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)