

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739925

Luminaire Tested: LD4D05D010-EU4DR200210IC9024-4LBSQW1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P739925
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR200210IC9024-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 507.7 lumens
Efficiency: N/A
Efficacy: 67.7 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739925
CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBSQW1MW

Luminous Intensity Polar Plot

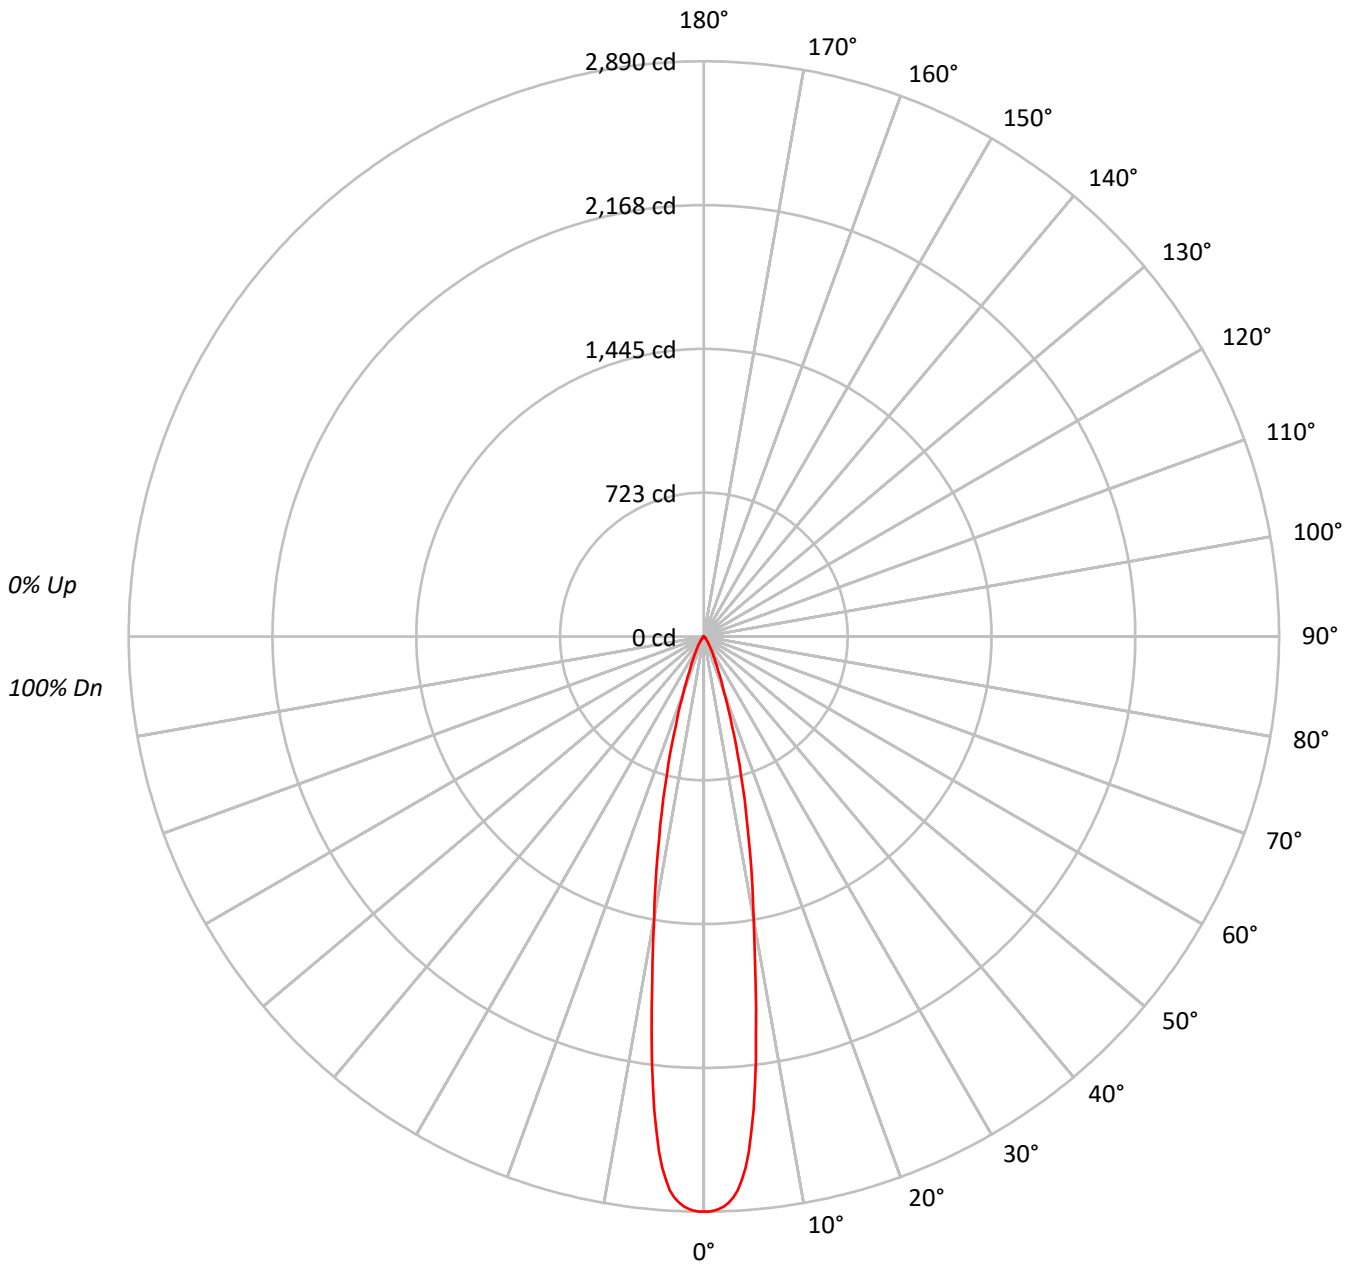



TEST NUMBER: P739925

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	95	93	92															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	91	89															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	88	86															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	86	84															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	84	82															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	82	80															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	80	78															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	78	76															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	315709
5°	284823
10°	159862
15°	81262
20°	34405
25°	15877
30°	8402
35°	4535
40°	2425
45°	1437
50°	833
55°	438
60°	284
65°	207
70°	96
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1437 cd/sqm



TEST NUMBER: P739925

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	205.7	40.5
10°-20°	202.6	39.9
20°-30°	66.2	13.0
30°-40°	22.5	4.4
40°-50°	7.6	1.5
50°-60°	2.3	0.4
60°-70°	0.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	474.5	93.5
0°-40°	497.0	97.9
0°-60°	506.9	99.8
0°-90°	507.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	507.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2890	
5°	2597	206
15°	718	203
25°	132	66
35°	34	23
45°	9	8
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P739925

CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2889.5
0.5°	2889.5
1°	2885.9
1.5°	2878.7
2°	2865.5
2.5°	2848.0
3°	2823.3
3.5°	2788.9
4°	2737.7
4.5°	2675.4
5°	2596.9
5.5°	2493.7
6°	2388.0
6.5°	2266.8
7°	2148.2
7.5°	2009.2
8°	1885.2
8.5°	1760.4
9°	1645.2
9.5°	1539.4
10°	1440.9
12.5°	1034.6
15°	718.4
17.5°	469.3
20°	295.9
22.5°	191.7
25°	131.7
27.5°	92.6
30°	66.6
32.5°	47.9
35°	34.0
37.5°	23.7
40°	17.0
42.5°	12.4
45°	9.3
47.5°	7.2
50°	4.9
52.5°	3.1
55°	2.3
57.5°	1.8
60°	1.3
62.5°	1.0
65°	0.8



TEST NUMBER: P739925
CATALOG NUMBER: LD4D05D010-EU4DR200210IC9024-4LBSQW1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		0.5
70°		0.3

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)