

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740617

Luminaire Tested: LD4D05D010-EU4DR650210IC9024-4LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740617  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR650210IC9024-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 496.9 lumens  
Efficiency: N/A  
Efficacy: 66.3 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740617

CATALOG NUMBER: LD4D05D010-EU4DR650210IC9024-4LBCSSQMW

### Luminous Intensity Polar Plot

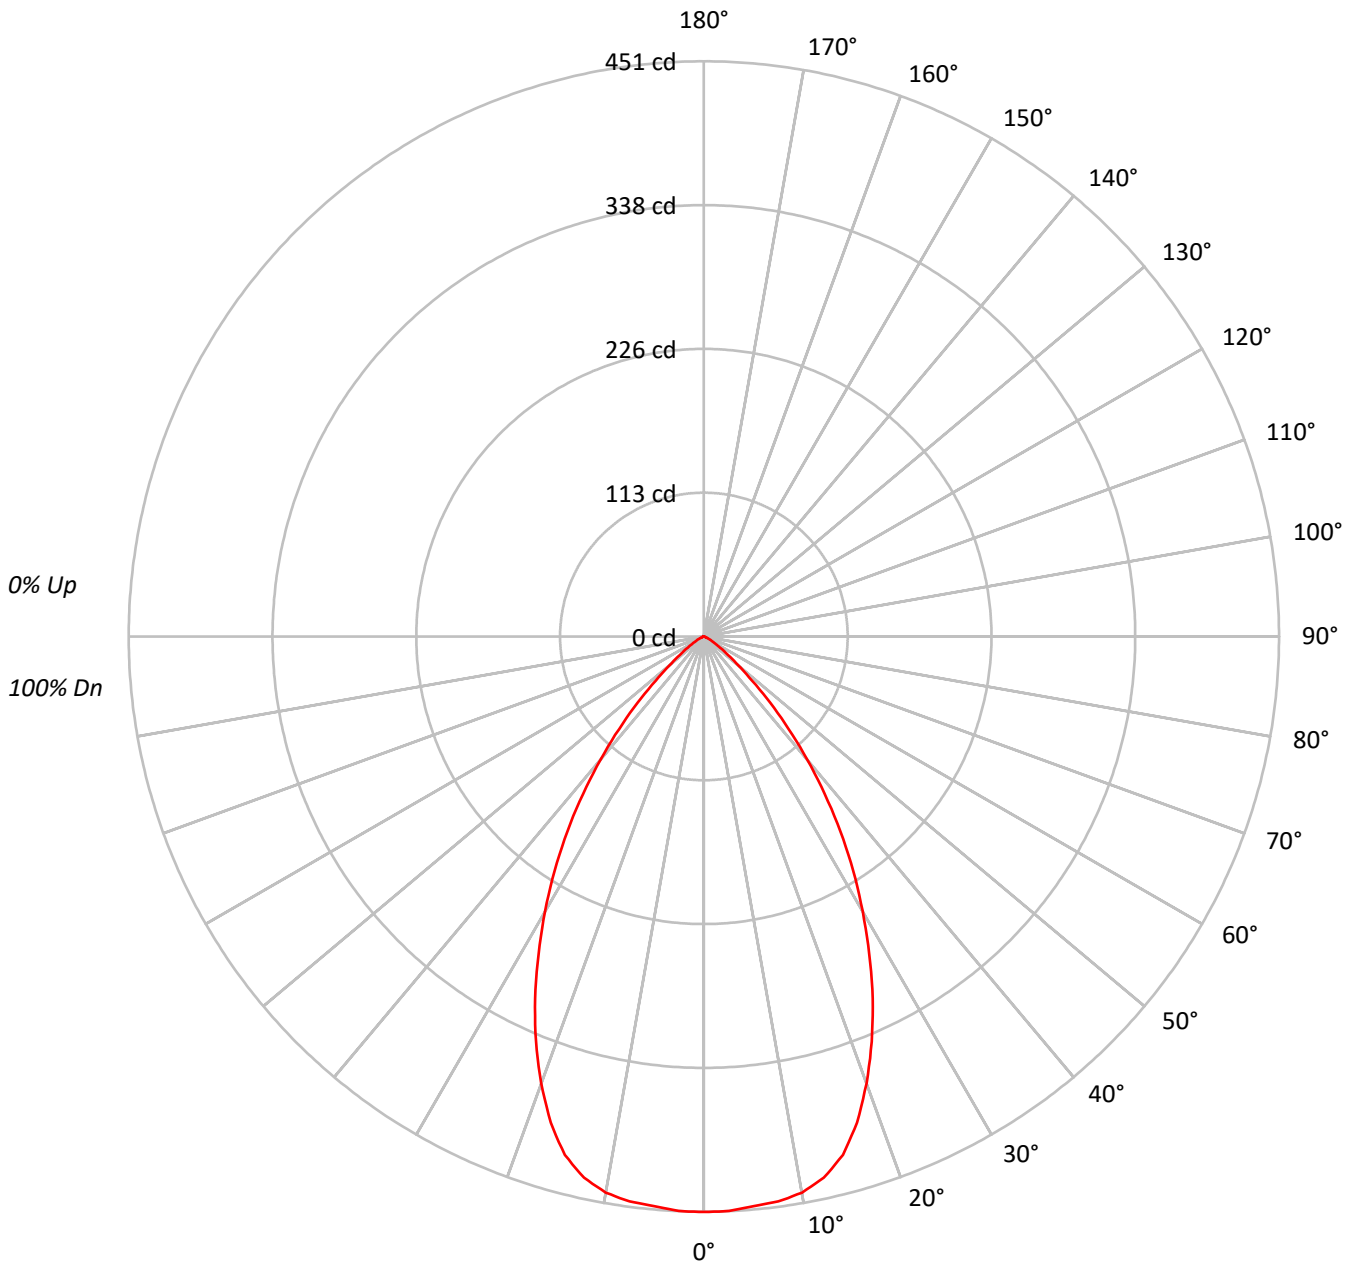



TEST NUMBER: P740617

CATALOG NUMBER: LD4D05D010-EU4DR650210IC9024-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	26352
5°	26282
10°	26260
15°	25449
20°	23170
25°	20190
30°	16792
35°	13304
40°	9606
45°	6071
50°	3162
55°	1680
60°	888
65°	484
70°	205
75°	226
80°	168
85°	134

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6071 cd/sqm



TEST NUMBER: P740617

CATALOG NUMBER: LD4D05D010-EU4DR650210IC9024-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	42.7	8.6
10°-20°	116.8	23.5
20°-30°	142.8	28.7
30°-40°	115.9	23.3
40°-50°	57.8	11.6
50°-60°	16.1	3.2
60°-70°	3.7	0.7
70°-80°	1.0	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	302.3	60.8
0°-40°	418.2	84.2
0°-60°	492.0	99.0
0°-90°	496.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	496.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	451	
5°	448	43
15°	421	117
25°	313	143
35°	187	116
45°	74	58
55°	16	16
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P740617

CATALOG NUMBER: LD4D05D010-EU4DR650210IC9024-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	451.2
2.5°	450.9
5°	448.3
7.5°	446.8
10°	442.8
12.5°	434.6
15°	420.9
17.5°	399.6
20°	372.8
22.5°	343.9
25°	313.3
27.5°	280.6
30°	249.0
32.5°	217.8
35°	186.6
37.5°	155.6
40°	126.0
42.5°	98.3
45°	73.5
47.5°	51.2
50°	34.8
52.5°	24.0
55°	16.5
57.5°	11.1
60°	7.6
62.5°	5.2
65°	3.5
67.5°	1.8
70°	1.2
72.5°	1.1
75°	1.0
77.5°	0.7
80°	0.5
82.5°	0.3
85°	0.2
87.5°	0.1
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)