

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740705

Luminaire Tested: LD4D05D010-EU4DR700210IC9024-4LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740705  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR700210IC9024-4LBSQW1MW  
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 460.4 lumens  
Efficiency: N/A  
Efficacy: 61.4 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740705  
CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBSQW1MW

### Luminous Intensity Polar Plot

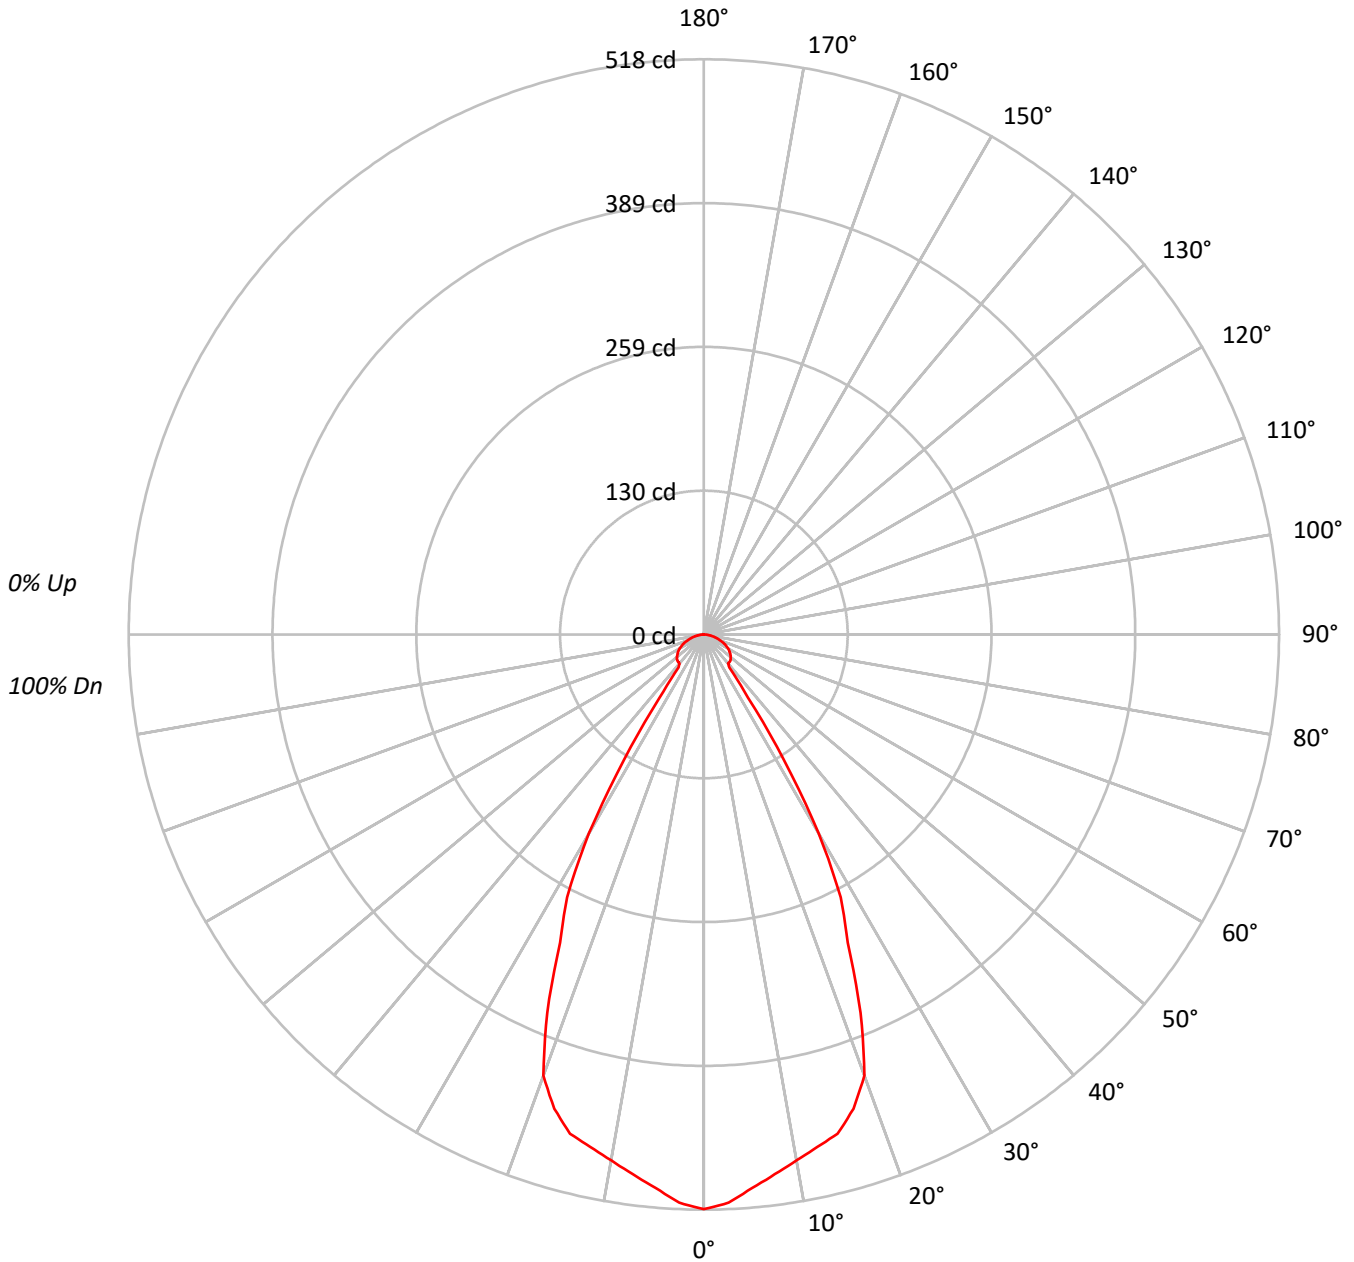



TEST NUMBER: P740705

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	56542
5°	54861
10°	53343
15°	52644
20°	49149
25°	36926
30°	26103
35°	9243
40°	4864
45°	5176
50°	5371
55°	5467
60°	5507
65°	5377
70°	5079
75°	4728
80°	4153
85°	3385

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 60°  
 Luminance: 5507 cd/sqm



TEST NUMBER: P740705

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	47.2	10.2
10°-20°	129.4	28.1
20°-30°	142.5	31.0
30°-40°	54.5	11.8
40°-50°	25.7	5.6
50°-60°	25.6	5.6
60°-70°	20.5	4.4
70°-80°	11.8	2.6
80°-90°	3.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	319.2	69.3
0°-40°	373.6	81.2
0°-60°	424.9	92.3
0°-90°	460.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	460.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	518	
5°	500	47
15°	465	129
25°	306	143
35°	69	54
45°	34	26
55°	29	26
65°	21	20
75°	11	12
85°	3	3
90°	0	



TEST NUMBER: P740705

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9024-4LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	517.5
2.5°	512.2
5°	500.2
7.5°	490.3
10°	480.8
12.5°	472.6
15°	465.4
17.5°	447.8
20°	422.7
22.5°	368.8
25°	306.3
27.5°	266.7
30°	206.9
32.5°	133.7
35°	69.3
37.5°	37.5
40°	34.1
42.5°	33.9
45°	33.5
47.5°	32.8
50°	31.6
52.5°	30.1
55°	28.7
57.5°	27.0
60°	25.2
62.5°	23.0
65°	20.8
67.5°	18.3
70°	15.9
72.5°	13.5
75°	11.2
77.5°	8.8
80°	6.6
82.5°	4.7
85°	2.7
87.5°	1.1
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)