

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740083

Luminaire Tested: LD4D05D010-EU4DR300210IC9027-4LBCSSQMMS

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740083  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR300210IC9027-4LBCSSQMMS  
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 548.8 lumens  
Efficiency: N/A  
Efficacy: 73.2 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740083  
CATALOG NUMBER: LD4D05D010-EU4DR300210IC9027-4LBCSSQMMS

### Luminous Intensity Polar Plot

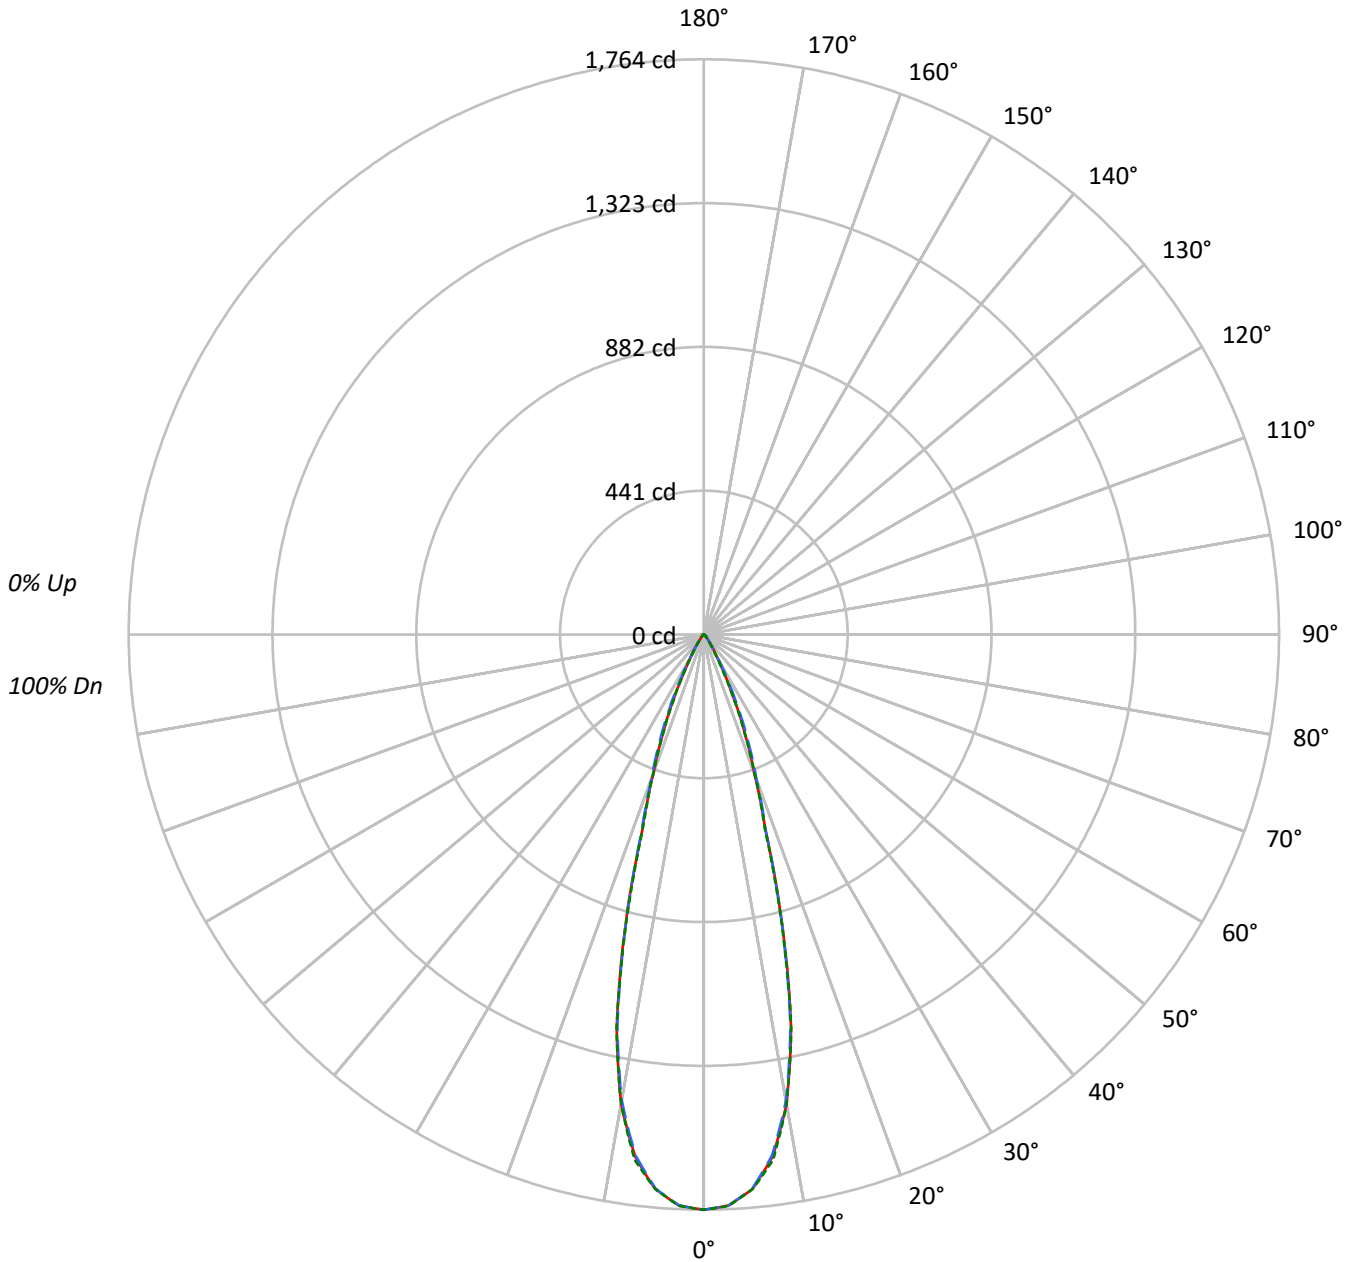



TEST NUMBER: P740083

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9027-4LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	135061	135061	135061
5°	131182	131028	131197
10°	113625	112824	113594
15°	74132	73736	73364
20°	36867	38243	36810
25°	18572	20937	18192
30°	7433	8105	6479
35°	3448	3308	2766
40°	1489	1659	1399
45°	1050	1299	1061
50°	357	953	381
55°	200	387	227
60°	153	168	153
65°	91	91	91
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1299 cd/sqm



TEST NUMBER: P740083

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9027-4LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	155.2	28.3
10°-20°	249.9	45.5
20°-30°	108.0	19.7
30°-40°	24.6	4.5
40°-50°	8.5	1.5
50°-60°	2.1	0.4
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	513.0	93.5
0°-40°	537.7	98.0
0°-60°	548.2	99.9
0°-90°	548.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	548.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1764	1764	1764	1764	1764	
5°	1707	1706	1705	1709	1708	155
15°	936	924	930	928	926	251
25°	220	228	248	222	215	105
35°	37	38	35	35	30	25
45°	10	12	12	12	10	7
55°	2	2	3	2	2	2
65°	0	0	0	0	0	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740083

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9027-4LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1764.5	1764.5	1764.5	1764.5	1764.5
2.5°	1752.8	1751.6	1752.3	1753.2	1753.5
5°	1707.3	1705.7	1705.3	1708.9	1707.5
7.5°	1615.6	1613.3	1609.7	1617.8	1625.3
10°	1461.9	1459.3	1451.6	1455.4	1461.5
12.5°	1235.1	1226.6	1226.5	1238.6	1236.9
15°	935.5	924.3	930.5	927.5	925.8
17.5°	629.1	624.8	633.1	630.6	619.8
20°	452.6	453.7	469.5	461.6	451.9
22.5°	330.2	334.3	353.1	332.6	325.0
25°	219.9	228.2	247.9	222.4	215.4
27.5°	135.2	139.1	159.1	133.5	129.7
30°	84.1	82.2	91.7	78.7	73.3
32.5°	55.2	52.8	55.8	50.1	45.7
35°	36.9	37.7	35.4	35.1	29.6
37.5°	23.0	26.5	23.4	24.9	19.1
40°	14.9	19.3	16.6	18.3	14.0
42.5°	12.2	14.8	13.6	14.5	12.5
45°	9.7	12.0	12.0	12.0	9.8
47.5°	5.4	8.1	10.3	8.3	5.7
50°	3.0	4.1	8.0	4.2	3.2
52.5°	2.1	2.3	5.4	2.4	2.2
55°	1.5	1.7	2.9	1.7	1.7
57.5°	1.2	1.3	1.5	1.3	1.2
60°	1.0	1.0	1.1	1.0	1.0
62.5°	0.7	0.7	0.8	0.7	0.7
65°	0.5	0.5	0.5	0.5	0.5
67.5°	0.3	0.3	0.3	0.3	0.3
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)