

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740017

Luminaire Tested: LD4D05D010-EU4DR250210IC9030-4LBCSSQMB

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740017  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR250210IC9030-4LBCSSQMB  
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 25° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 522.1 lumens  
Efficiency: N/A  
Efficacy: 69.6 lumens/watt  
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740017

CATALOG NUMBER: LD4D05D010-EU4DR250210IC9030-4LBCSSQMB

### Luminous Intensity Polar Plot

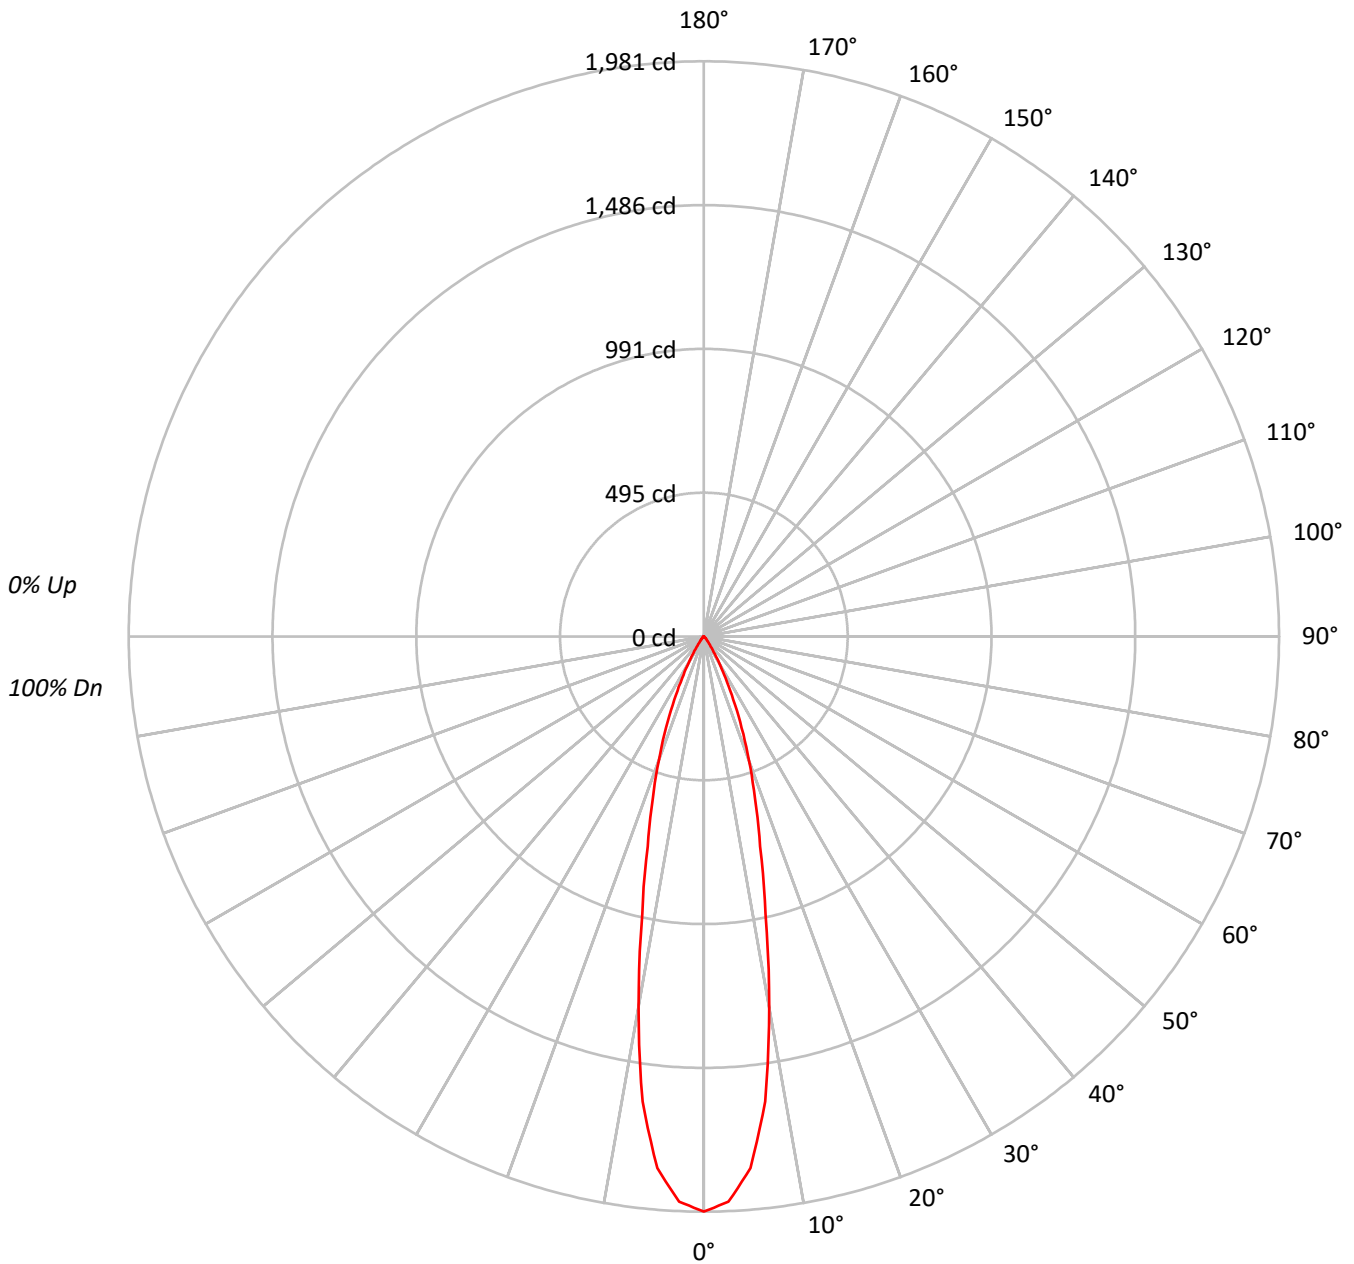



TEST NUMBER: P740017

CATALOG NUMBER: LD4D05D010-EU4DR250210IC9030-4LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104		103	102	101		99	99	98	96
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		97	95	94	92
3	107	102	98	95	105	101	97	94	98	95	93		96	93	91		94	92	90	89
4	103	97	93	90	102	96	93	90	94	91	89		93	90	88		91	89	87	85
5	100	94	89	86	98	93	89	86	91	87	85		89	86	84		88	85	83	82
6	97	90	85	82	95	89	85	82	88	84	81		87	83	81		85	83	80	79
7	93	87	82	79	92	86	82	79	85	81	78		84	80	78		83	80	78	77
8	91	84	79	76	90	83	79	76	82	78	76		81	78	75		80	77	75	74
9	88	81	76	73	87	80	76	73	80	76	73		79	75	73		78	75	73	72
10	85	78	74	71	85	78	74	71	77	73	71		76	73	71		76	73	70	69

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	216402
5°	201555
10°	143775
15°	84678
20°	52683
25°	28909
30°	13222
35°	5002
40°	2268
45°	1360
50°	561
55°	362
60°	240
65°	181
70°	32
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1360 cd/sqm



TEST NUMBER: P740017

CATALOG NUMBER: LD4D05D010-EU4DR250210IC9030-4LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	157.9	30.2
10°-20°	213.9	41.0
20°-30°	113.2	21.7
30°-40°	27.9	5.4
40°-50°	6.8	1.3
50°-60°	1.8	0.3
60°-70°	0.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	485.0	92.9
0°-40°	513.0	98.2
0°-60°	521.5	99.9
0°-90°	522.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	522.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1981	
5°	1838	158
15°	749	214
25°	240	113
35°	38	28
45°	9	7
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P740017

CATALOG NUMBER: LD4D05D010-EU4DR250210IC9030-4LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1980.6
2.5°	1948.1
5°	1837.7
7.5°	1615.9
10°	1295.9
12.5°	979.6
15°	748.6
17.5°	583.4
20°	453.1
22.5°	339.8
25°	239.8
27.5°	160.8
30°	104.8
32.5°	63.8
35°	37.5
37.5°	23.0
40°	15.9
42.5°	12.1
45°	8.8
47.5°	5.3
50°	3.3
52.5°	2.4
55°	1.9
57.5°	1.5
60°	1.1
62.5°	0.9
65°	0.7
67.5°	0.2
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)