

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740108

Luminaire Tested: LD4D05D010-EU4DR300210IC9035-4LBCSSQMB

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P740108
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR300210IC9035-4LBCSSQMB
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 598.2 lumens
Efficiency: N/A
Efficacy: 79.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740108

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9035-4LBCSSQMB

Luminous Intensity Polar Plot

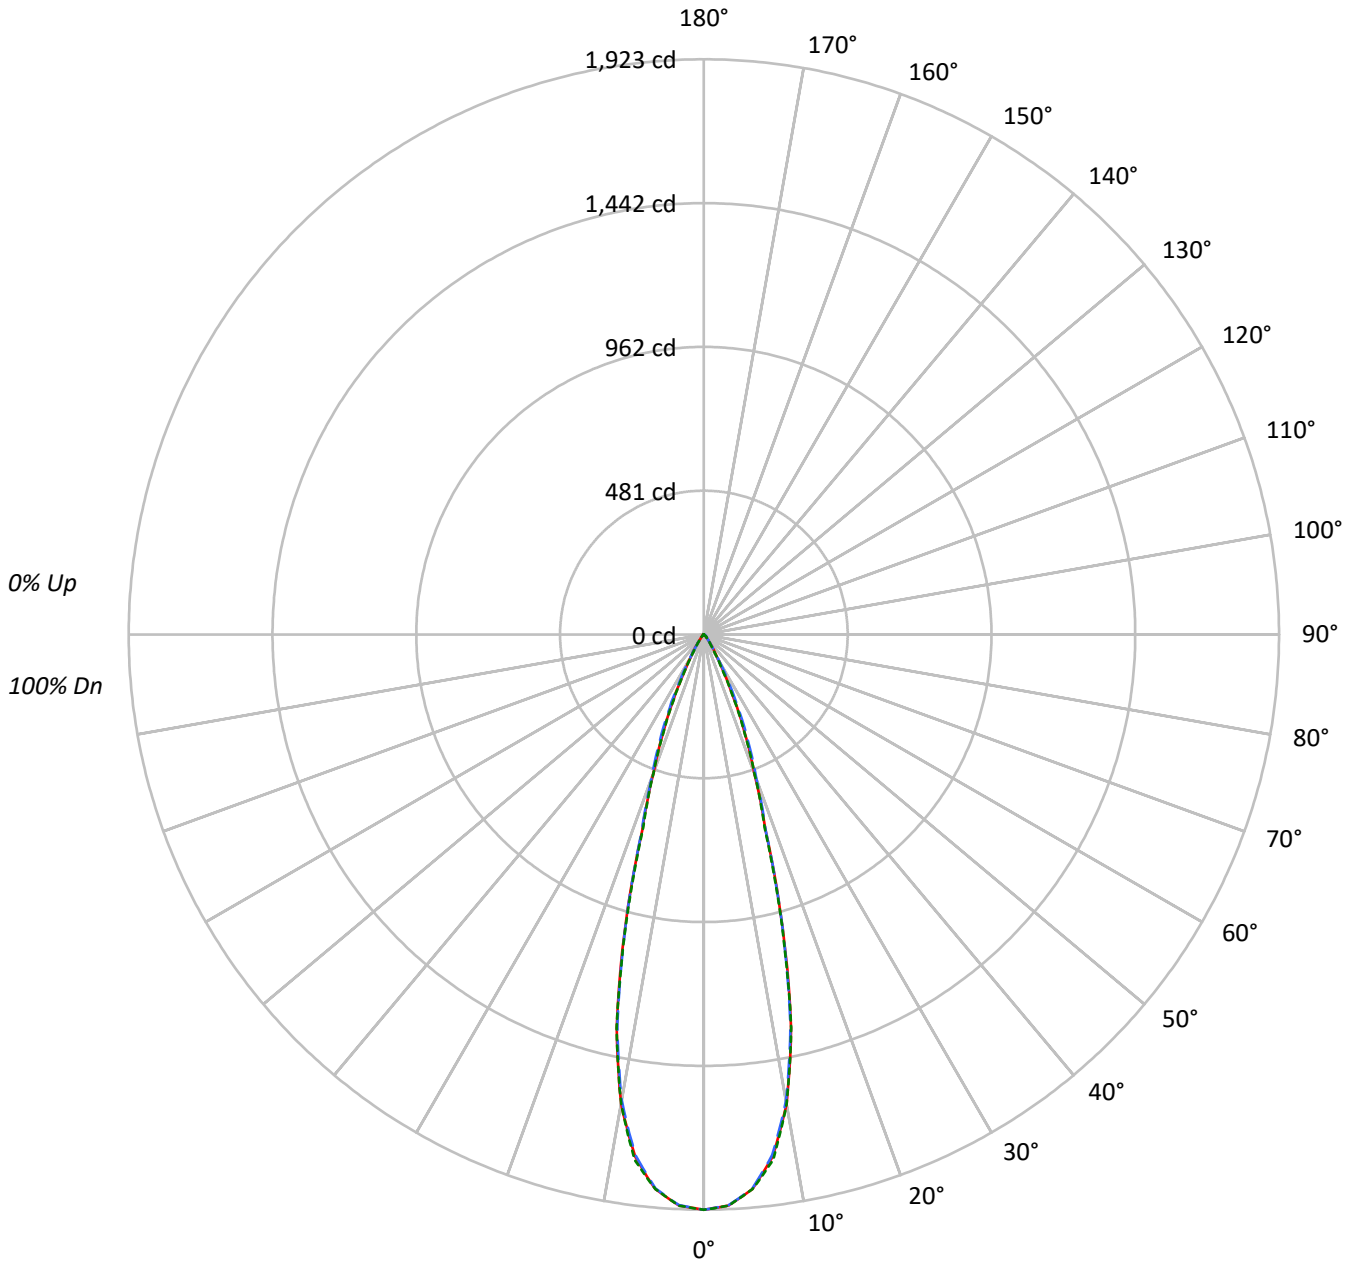



TEST NUMBER: P740108

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9035-4LBCSSQMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	147224	147224	147224
5°	142999	142830	143007
10°	123854	122983	123830
15°	80813	80377	79973
20°	40182	41689	40133
25°	20244	22829	19822
30°	8105	8830	7062
35°	3756	3598	3018
40°	1619	1799	1529
45°	1147	1418	1158
50°	393	1036	417
55°	227	427	240
60°	153	184	153
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1418 cd/sqm



TEST NUMBER: P740108

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9035-4LBCSSQMB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.1	28.3
10°-20°	272.4	45.5
20°-30°	117.7	19.7
30°-40°	26.8	4.5
40°-50°	9.2	1.5
50°-60°	2.2	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	559.2	93.5
0°-40°	586.1	98.0
0°-60°	597.5	99.9
0°-90°	598.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	598.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1923	1923	1923	1923	1923	
5°	1861	1859	1859	1863	1861	169
15°	1020	1008	1014	1011	1009	273
25°	240	249	270	242	235	115
35°	40	41	38	38	32	27
45°	11	13	13	13	11	7
55°	2	2	3	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P740108

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9035-4LBCSSQMB

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1923.4	1923.4	1923.4	1923.4	1923.4
2.5°	1910.7	1909.4	1910.1	1911.0	1911.4
5°	1861.1	1859.3	1858.9	1862.8	1861.2
7.5°	1761.1	1758.5	1754.7	1763.4	1771.7
10°	1593.5	1590.7	1582.3	1586.5	1593.2
12.5°	1346.3	1337.1	1336.9	1350.1	1348.3
15°	1019.8	1007.5	1014.3	1011.0	1009.2
17.5°	685.8	681.1	690.1	687.4	675.6
20°	493.3	494.6	511.8	503.2	492.7
22.5°	360.0	364.4	384.9	362.5	354.3
25°	239.7	248.7	270.3	242.4	234.7
27.5°	147.4	151.5	173.4	145.5	141.3
30°	91.7	89.6	99.9	85.8	79.9
32.5°	60.2	57.5	60.8	54.6	49.8
35°	40.2	41.1	38.5	38.3	32.3
37.5°	25.1	28.9	25.5	27.2	20.8
40°	16.2	21.0	18.0	19.9	15.3
42.5°	13.3	16.2	14.8	15.8	13.6
45°	10.6	13.1	13.1	13.1	10.7
47.5°	5.8	8.8	11.2	9.0	6.2
50°	3.3	4.4	8.7	4.6	3.5
52.5°	2.3	2.6	6.0	2.6	2.3
55°	1.7	1.8	3.2	1.9	1.8
57.5°	1.3	1.4	1.7	1.4	1.3
60°	1.0	1.0	1.2	1.1	1.0
62.5°	0.7	0.7	0.9	0.7	0.7
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)