

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740744

Luminaire Tested: LD4D05D010-EU4DR700210IC9035-4LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P740744
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR700210IC9035-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 557.0 lumens
Efficiency: N/A
Efficacy: 74.3 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740744
CATALOG NUMBER: LD4D05D010-EU4DR700210IC9035-4LBSQW1MW

Luminous Intensity Polar Plot

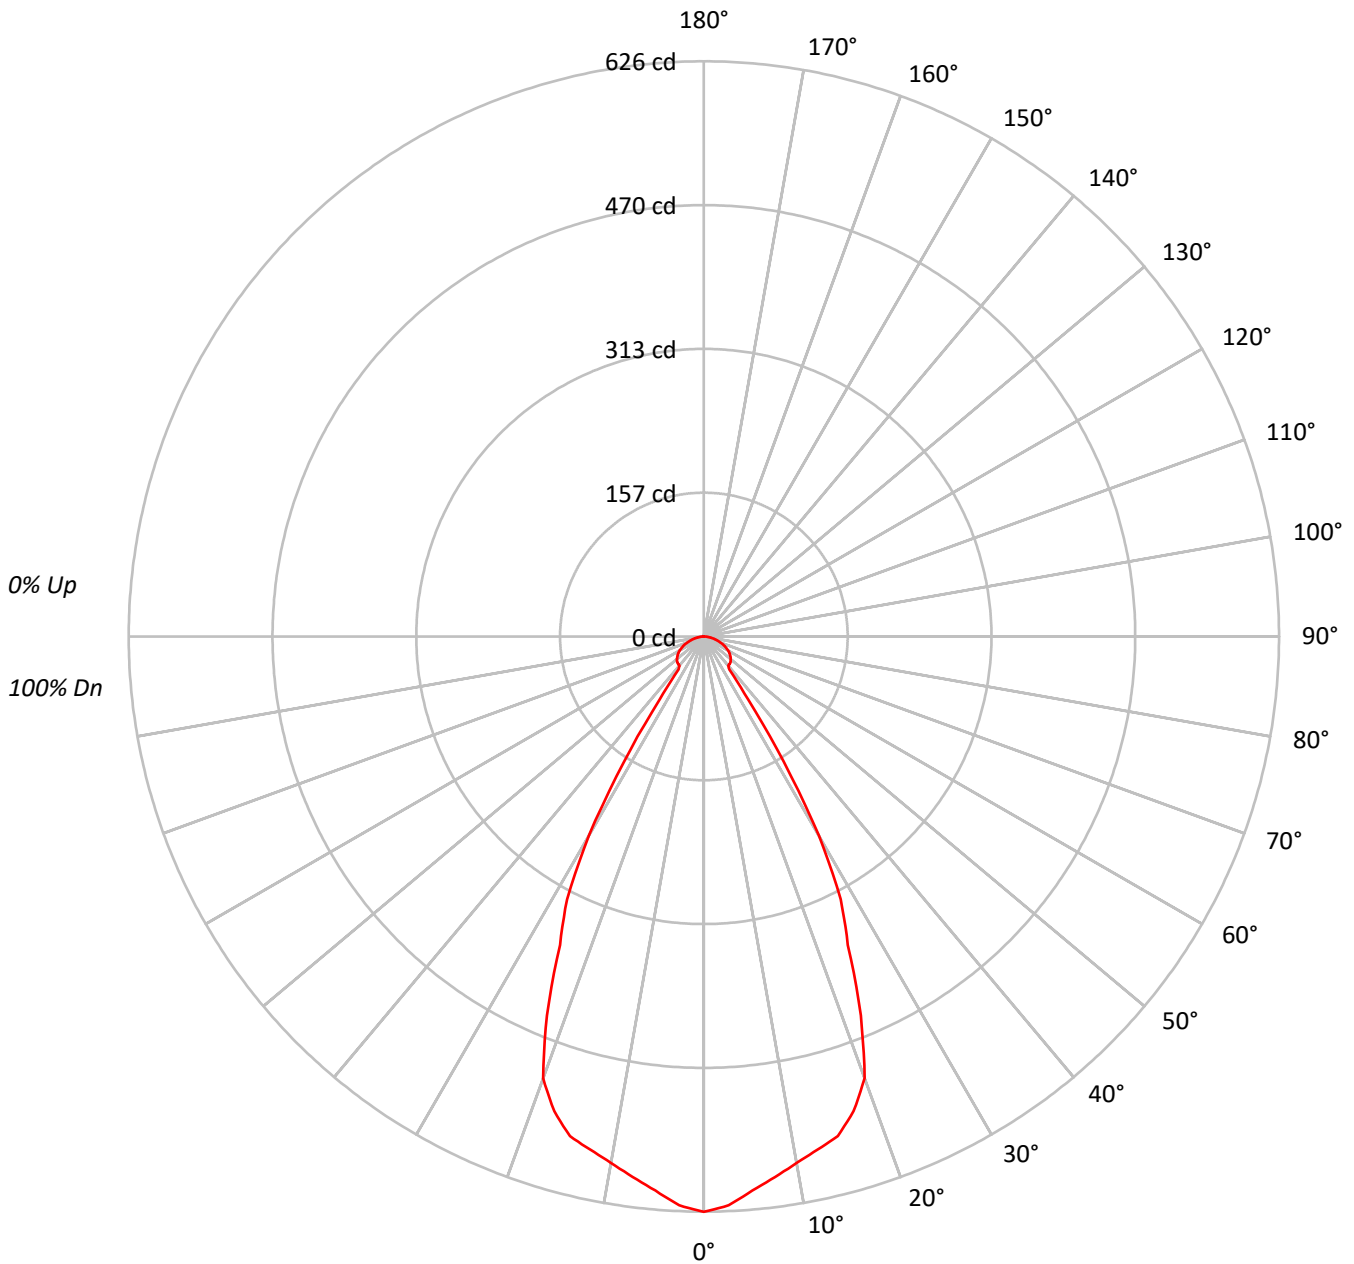



TEST NUMBER: P740744

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9035-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																											
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																											
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																											
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																											
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																											
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																											
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																											
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																											
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																											
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	68419
5°	66388
10°	64537
15°	63695
20°	59474
25°	44678
30°	31591
35°	11191
40°	5891
45°	6273
50°	6493
55°	6610
60°	6643
65°	6515
70°	6166
75°	5699
80°	5034
85°	4137

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 6650 cd/sqm



TEST NUMBER: P740744

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9035-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.1	10.2
10°-20°	156.6	28.1
20°-30°	172.5	31.0
30°-40°	65.9	11.8
40°-50°	31.1	5.6
50°-60°	30.9	5.6
60°-70°	24.8	4.4
70°-80°	14.3	2.6
80°-90°	3.9	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	386.2	69.3
0°-40°	452.1	81.2
0°-60°	514.1	92.3
0°-90°	557.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	557.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	626	
5°	605	57
15°	563	157
25°	371	172
35°	84	66
45°	41	31
55°	35	31
65°	25	25
75°	14	14
85°	3	4
90°	0	



TEST NUMBER: P740744

CATALOG NUMBER: LD4D05D010-EU4DR700210IC9035-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	626.2
2.5°	619.7
5°	605.3
7.5°	593.3
10°	581.7
12.5°	571.9
15°	563.1
17.5°	541.8
20°	511.5
22.5°	446.3
25°	370.6
27.5°	322.6
30°	250.4
32.5°	161.7
35°	83.9
37.5°	45.3
40°	41.3
42.5°	41.0
45°	40.6
47.5°	39.6
50°	38.2
52.5°	36.5
55°	34.7
57.5°	32.7
60°	30.4
62.5°	27.8
65°	25.2
67.5°	22.2
70°	19.3
72.5°	16.3
75°	13.5
77.5°	10.6
80°	8.0
82.5°	5.7
85°	3.3
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)