

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739898

Luminaire Tested: LD4D05D010-EU4DR150210IC9040-4LBSQW1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P739898
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D05D010-EU4DR150210IC9040-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 601.7 lumens
Efficiency: N/A
Efficacy: 80.2 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739898
CATALOG NUMBER: LD4D05D010-EU4DR150210IC9040-4LBSQW1B

Luminous Intensity Polar Plot

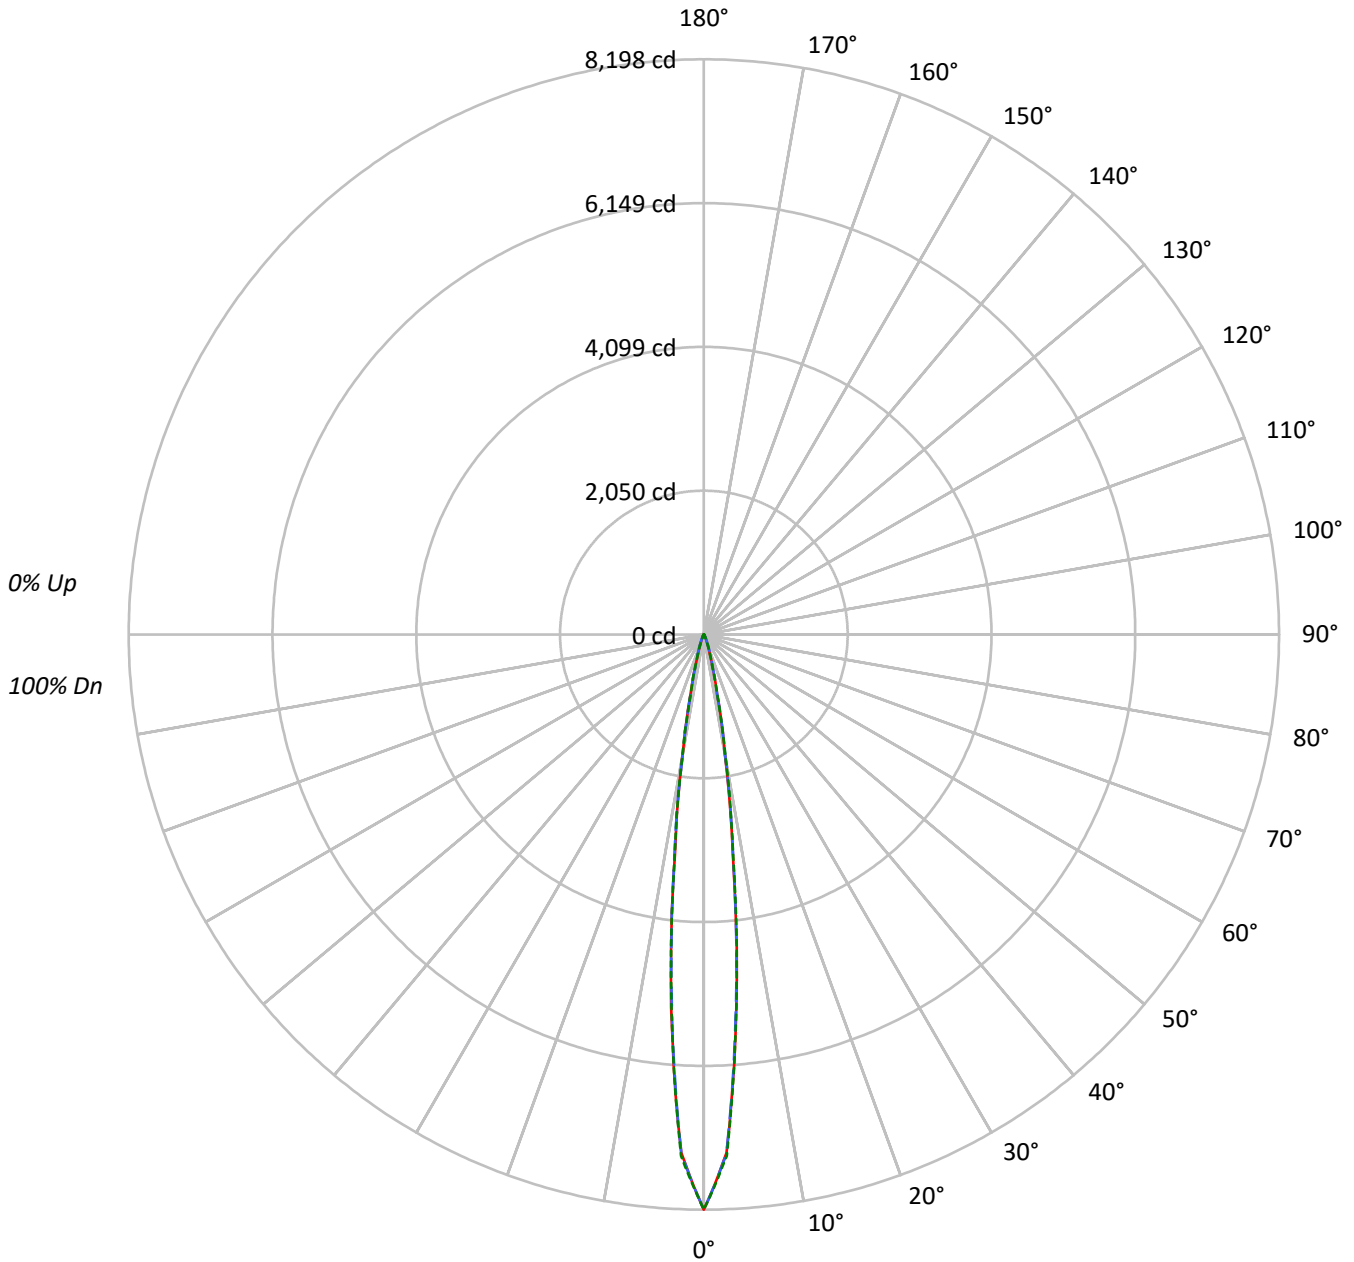



TEST NUMBER: P739898

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9040-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	99	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	99	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	922484	922484	922484
5°	542099	535076	539314
10°	161786	162924	165416
15°	40241	41031	39763
20°	12044	13943	12298
25°	4246	5406	4300
30°	1558	2052	1587
35°	784	879	755
40°	490	540	490
45°	364	392	364
50°	292	292	292
55°	244	244	244
60°	197	197	197
65°	150	150	150
70°	124	124	124
75°	76	76	106
80°	55	55	55
85°	25	25	25

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 392 cd/sqm



TEST NUMBER: P739898

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9040-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	390.3	64.9
10°-20°	160.5	26.7
20°-30°	31.9	5.3
30°-40°	8.0	1.3
40°-50°	4.2	0.7
50°-60°	3.1	0.5
60°-70°	2.2	0.4
70°-80°	1.2	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	582.7	96.8
0°-40°	590.6	98.2
0°-60°	597.9	99.4
0°-90°	601.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	601.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	8198	8198	8198	8198	8198	
5°	5334	5279	5265	5302	5307	390
15°	463	472	472	464	458	159
25°	54	62	69	61	55	29
35°	11	12	12	12	10	7
45°	5	5	6	5	5	4
55°	4	4	4	4	4	3
65°	2	2	2	2	2	2
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P739898

CATALOG NUMBER: LD4D05D010-EU4DR150210IC9040-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	8198.4	8198.4	8198.4	8198.4	8198.4
2.5°	7395.3	7401.6	7404.0	7411.3	7438.4
5°	5334.1	5279.2	5265.0	5301.5	5306.7
7.5°	3159.7	3170.8	3211.4	3220.4	3187.8
10°	1733.9	1748.2	1746.1	1758.6	1772.8
12.5°	886.8	875.7	872.2	886.4	866.6
15°	463.3	472.0	472.4	464.0	457.8
17.5°	249.2	259.3	275.9	262.4	241.6
20°	147.2	156.2	170.4	159.3	150.3
22.5°	90.9	98.2	108.3	99.6	92.3
25°	54.5	61.8	69.4	61.4	55.2
27.5°	32.3	38.5	43.4	38.2	31.9
30°	20.8	24.3	27.4	23.9	21.2
32.5°	14.6	16.0	17.4	16.0	14.6
35°	10.8	11.5	12.1	11.5	10.4
37.5°	8.3	9.0	9.4	8.7	8.0
40°	6.9	7.3	7.6	7.3	6.9
42.5°	5.9	6.2	6.2	6.2	5.9
45°	5.2	5.2	5.6	5.2	5.2
47.5°	4.5	4.5	4.9	4.5	4.5
50°	4.2	4.2	4.2	4.2	4.2
52.5°	3.8	3.8	3.8	3.8	3.8
55°	3.5	3.5	3.5	3.5	3.5
57.5°	3.1	3.1	3.1	3.1	3.1
60°	2.8	2.8	2.8	2.8	2.8
62.5°	2.4	2.4	2.4	2.4	2.4
65°	2.1	2.1	2.1	2.1	2.1
67.5°	2.1	2.1	2.1	2.1	2.1
70°	1.7	1.7	1.7	1.7	1.7
72.5°	1.4	1.4	1.4	1.4	1.4
75°	1.0	1.0	1.0	1.0	1.4
77.5°	1.0	1.0	1.0	1.0	1.0
80°	0.7	0.7	0.7	0.7	0.7
82.5°	0.7	0.7	0.7	0.7	0.7
85°	0.3	0.3	0.3	0.3	0.3
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)