

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740123

Luminaire Tested: LD4D05D010-EU4DR300210IC9040-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740123  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR300210IC9040-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 614.8 lumens  
Efficiency: N/A  
Efficacy: 82.0 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740123

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9040-4LBCSSQMW

### Luminous Intensity Polar Plot

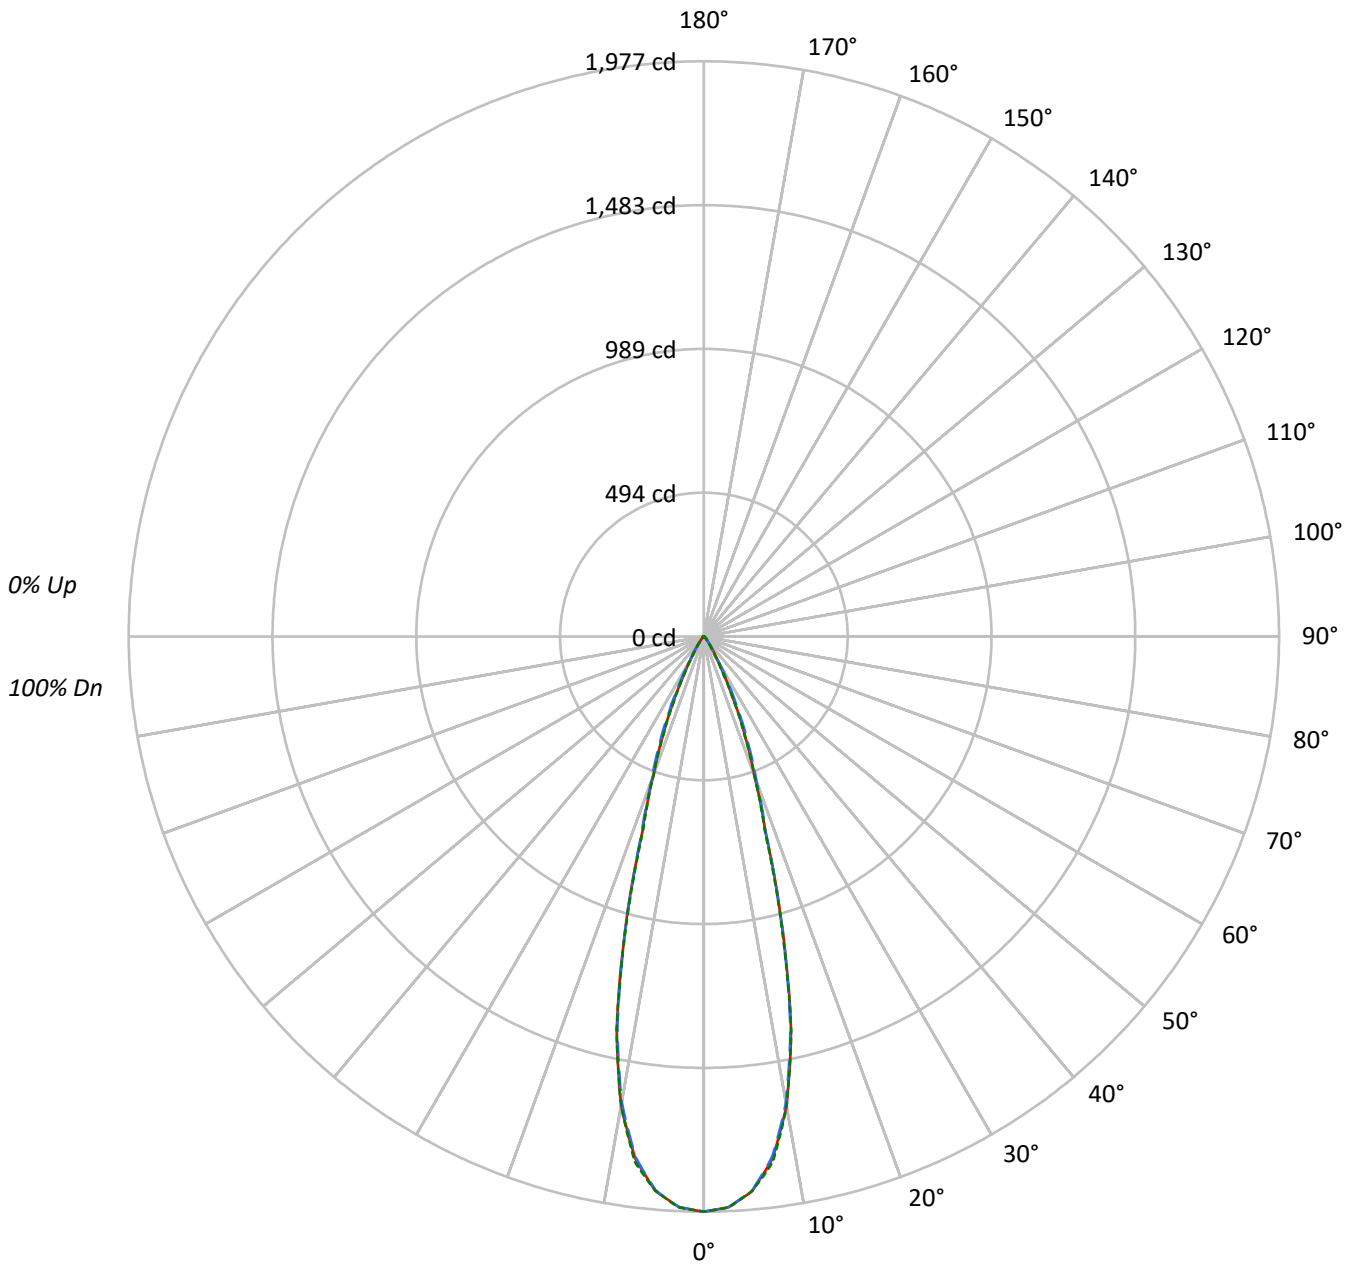



TEST NUMBER: P740123

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9040-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	151319	151319	151319
5°	146979	146802	146987
10°	127304	126403	127273
15°	83063	82611	82199
20°	41306	42854	41249
25°	20802	23462	20379
30°	8335	9077	7256
35°	3869	3700	3102
40°	1669	1859	1569
45°	1180	1461	1180
50°	405	1060	429
55°	227	440	240
60°	168	199	168
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1461 cd/sqm



TEST NUMBER: P740123

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9040-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	173.8	28.3
10°-20°	280.0	45.5
20°-30°	121.0	19.7
30°-40°	27.6	4.5
40°-50°	9.5	1.5
50°-60°	2.3	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	574.8	93.5
0°-40°	602.4	98.0
0°-60°	614.1	99.9
0°-90°	614.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	614.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1977	1977	1977	1977	1977	
5°	1913	1911	1911	1915	1913	174
15°	1048	1036	1042	1039	1037	281
25°	246	256	278	249	241	118
35°	41	42	40	39	33	28
45°	11	14	14	14	11	8
55°	2	2	3	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P740123

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9040-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1976.9	1976.9	1976.9	1976.9	1976.9
2.5°	1963.8	1962.4	1963.2	1964.2	1964.6
5°	1912.9	1911.0	1910.6	1914.6	1913.0
7.5°	1810.1	1807.4	1803.5	1812.5	1821.0
10°	1637.9	1635.0	1626.3	1630.6	1637.5
12.5°	1383.7	1374.3	1374.1	1387.6	1385.8
15°	1048.2	1035.6	1042.5	1039.1	1037.3
17.5°	704.8	700.0	709.3	706.5	694.4
20°	507.1	508.3	526.1	517.1	506.4
22.5°	370.0	374.5	395.6	372.6	364.2
25°	246.3	255.7	277.8	249.2	241.3
27.5°	151.5	155.8	178.2	149.5	145.3
30°	94.3	92.1	102.7	88.1	82.1
32.5°	61.8	59.1	62.5	56.1	51.2
35°	41.4	42.2	39.6	39.3	33.2
37.5°	25.8	29.7	26.2	28.0	21.4
40°	16.7	21.5	18.6	20.5	15.7
42.5°	13.7	16.6	15.2	16.2	14.0
45°	10.9	13.5	13.5	13.5	10.9
47.5°	6.0	9.1	11.6	9.2	6.4
50°	3.4	4.6	8.9	4.8	3.6
52.5°	2.3	2.6	6.1	2.7	2.4
55°	1.7	1.8	3.3	1.9	1.8
57.5°	1.4	1.4	1.7	1.4	1.4
60°	1.1	1.1	1.3	1.1	1.1
62.5°	0.8	0.8	0.9	0.8	0.8
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)