

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740136

Luminaire Tested: LD4D05D010-EU4DR300210IC9050-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740136  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D05D010-EU4DR300210IC9050-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 607.5 lumens  
Efficiency: N/A  
Efficacy: 81.0 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740136

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9050-4LBCSSQMW

### Luminous Intensity Polar Plot

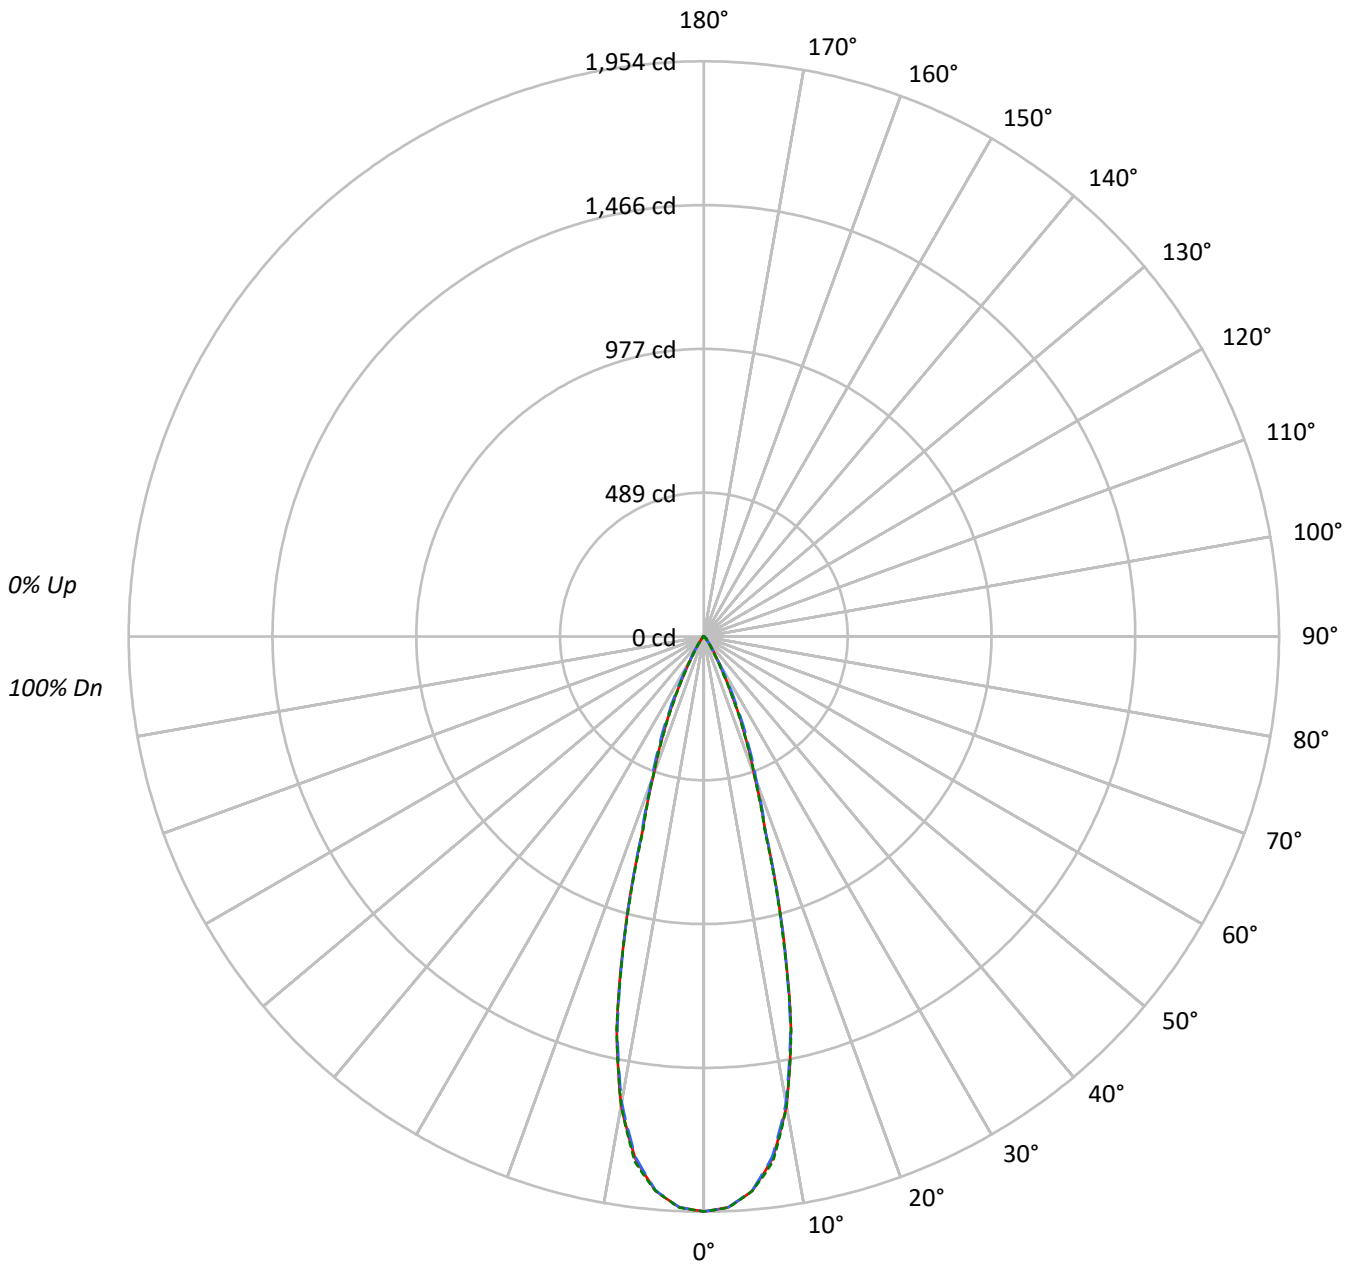



TEST NUMBER: P740136

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9050-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	149535	149535	149535
5°	145243	145074	145250
10°	125804	124911	125773
15°	82080	81637	81233
20°	40809	42341	40760
25°	20557	23183	20143
30°	8237	8971	7168
35°	3822	3654	3065
40°	1649	1829	1549
45°	1158	1440	1169
50°	405	1048	429
55°	227	440	240
60°	153	199	153
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1440 cd/sqm



TEST NUMBER: P740136

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9050-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	171.8	28.3
10°-20°	276.7	45.5
20°-30°	119.6	19.7
30°-40°	27.2	4.5
40°-50°	9.3	1.5
50°-60°	2.3	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	568.0	93.5
0°-40°	595.2	98.0
0°-60°	606.9	99.9
0°-90°	607.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	607.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1954	1954	1954	1954	1954	
5°	1890	1888	1888	1892	1890	172
15°	1036	1023	1030	1027	1025	277
25°	243	253	274	246	238	117
35°	41	42	39	39	33	28
45°	11	13	13	13	11	8
55°	2	2	3	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740136

CATALOG NUMBER: LD4D05D010-EU4DR300210IC9050-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1953.6	1953.6	1953.6	1953.6	1953.6
2.5°	1940.6	1939.3	1940.1	1941.0	1941.4
5°	1890.3	1888.4	1888.1	1892.0	1890.4
7.5°	1788.7	1786.1	1782.2	1791.1	1799.5
10°	1618.6	1615.7	1607.1	1611.4	1618.2
12.5°	1367.3	1358.1	1357.8	1371.3	1369.5
15°	1035.8	1023.3	1030.2	1026.8	1025.1
17.5°	696.5	691.7	700.9	698.1	686.2
20°	501.0	502.3	519.8	511.0	500.4
22.5°	365.6	370.1	390.9	368.2	359.9
25°	243.4	252.6	274.5	246.2	238.5
27.5°	149.7	154.0	176.1	147.8	143.6
30°	93.2	91.0	101.5	87.1	81.1
32.5°	61.1	58.4	61.8	55.5	50.6
35°	40.9	41.7	39.1	38.8	32.8
37.5°	25.5	29.3	25.9	27.6	21.1
40°	16.5	21.3	18.3	20.2	15.5
42.5°	13.5	16.4	15.1	16.0	13.8
45°	10.7	13.3	13.3	13.3	10.8
47.5°	6.0	8.9	11.4	9.1	6.3
50°	3.4	4.5	8.8	4.7	3.6
52.5°	2.3	2.6	6.0	2.7	2.4
55°	1.7	1.8	3.3	1.9	1.8
57.5°	1.3	1.4	1.7	1.4	1.3
60°	1.0	1.0	1.3	1.1	1.0
62.5°	0.7	0.7	0.9	0.7	0.7
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)