

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P749684

Luminaire Tested: LD4D50D010-EU4DR6540509040-4LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P749684
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D50D010-EU4DR6540509040-4LBCSSQMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4504.6 lumens
Efficiency: N/A
Efficacy: 95.8 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 47
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P749684

CATALOG NUMBER: LD4D50D010-EU4DR6540509040-4LBCSSQMMS

Luminous Intensity Polar Plot

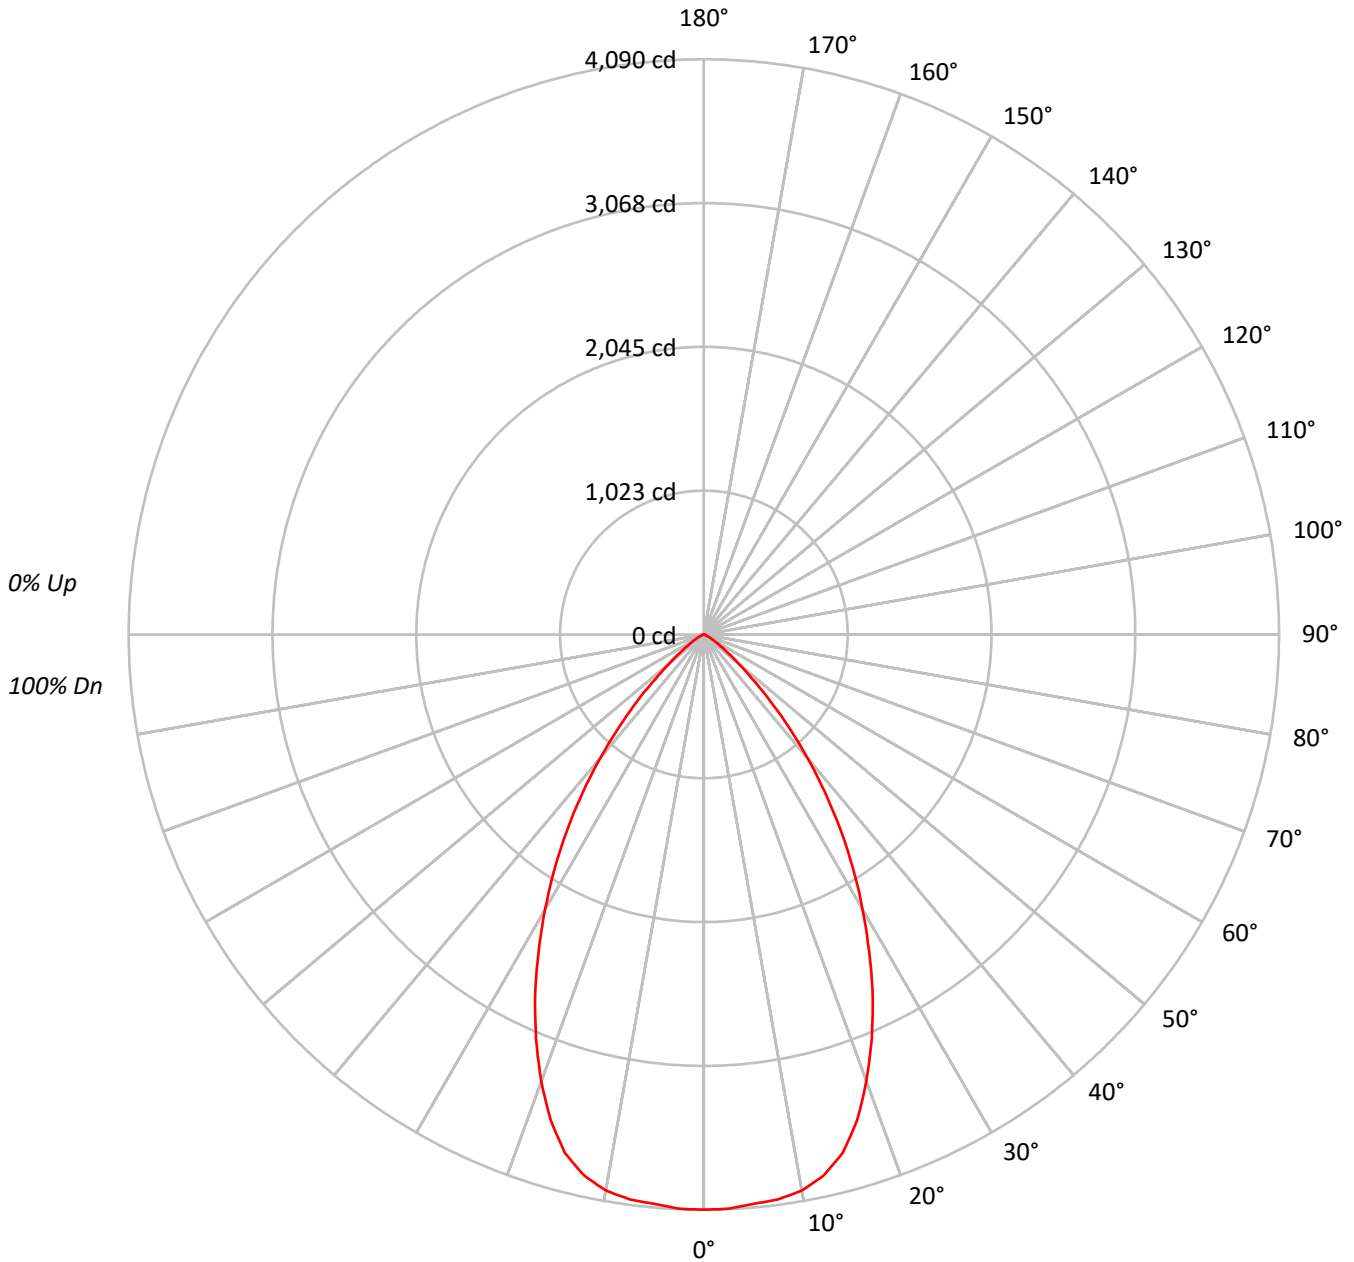



TEST NUMBER: P749684

CATALOG NUMBER: LD4D50D010-EU4DR6540509040-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93		
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85		
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78		
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72		
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66		
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61		
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56		
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52		
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49		
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	238878
5°	238272
10°	238067
15°	230731
20°	210049
25°	183046
30°	152243
35°	120629
40°	87067
45°	55009
50°	28666
55°	15243
60°	8001
65°	4408
70°	1844
75°	2031
80°	1413
85°	1206

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 55009 cd/sqm



TEST NUMBER: P749684

CATALOG NUMBER: LD4D50D010-EU4DR6540509040-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	386.8	8.6
10°-20°	1059.2	23.5
20°-30°	1294.7	28.7
30°-40°	1050.5	23.3
40°-50°	523.5	11.6
50°-60°	146.0	3.2
60°-70°	33.2	0.7
70°-80°	8.6	0.2
80°-90°	2.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2740.6	60.8
0°-40°	3791.1	84.2
0°-60°	4460.6	99.0
0°-90°	4504.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4504.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4090	
5°	4064	387
15°	3816	1059
25°	2840	1295
35°	1692	1050
45°	666	523
55°	150	146
65°	32	33
75°	9	9
85°	2	2
90°	0	



TEST NUMBER: P749684

CATALOG NUMBER: LD4D50D010-EU4DR6540509040-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	4090.1
2.5°	4087.1
5°	4064.2
7.5°	4051.0
10°	4014.3
12.5°	3939.8
15°	3816.0
17.5°	3622.5
20°	3379.6
22.5°	3117.6
25°	2840.5
27.5°	2544.2
30°	2257.5
32.5°	1974.4
35°	1691.9
37.5°	1410.0
40°	1142.0
42.5°	890.7
45°	666.0
47.5°	464.0
50°	315.5
52.5°	217.6
55°	149.7
57.5°	101.0
60°	68.5
62.5°	47.5
65°	31.9
67.5°	16.2
70°	10.8
72.5°	10.2
75°	9.0
77.5°	6.0
80°	4.2
82.5°	3.0
85°	1.8
87.5°	1.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)