

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750396

Luminaire Tested: LD4D55D010-EU4DR6055659040-4LBSQW1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P750396  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D55D010-EU4DR6055659040-4LBSQW1B  
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4631.5 lumens  
Efficiency: N/A  
Efficacy: 79.6 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P750396

CATALOG NUMBER: LD4D55D010-EU4DR6055659040-4LBSQW1B

### Luminous Intensity Polar Plot

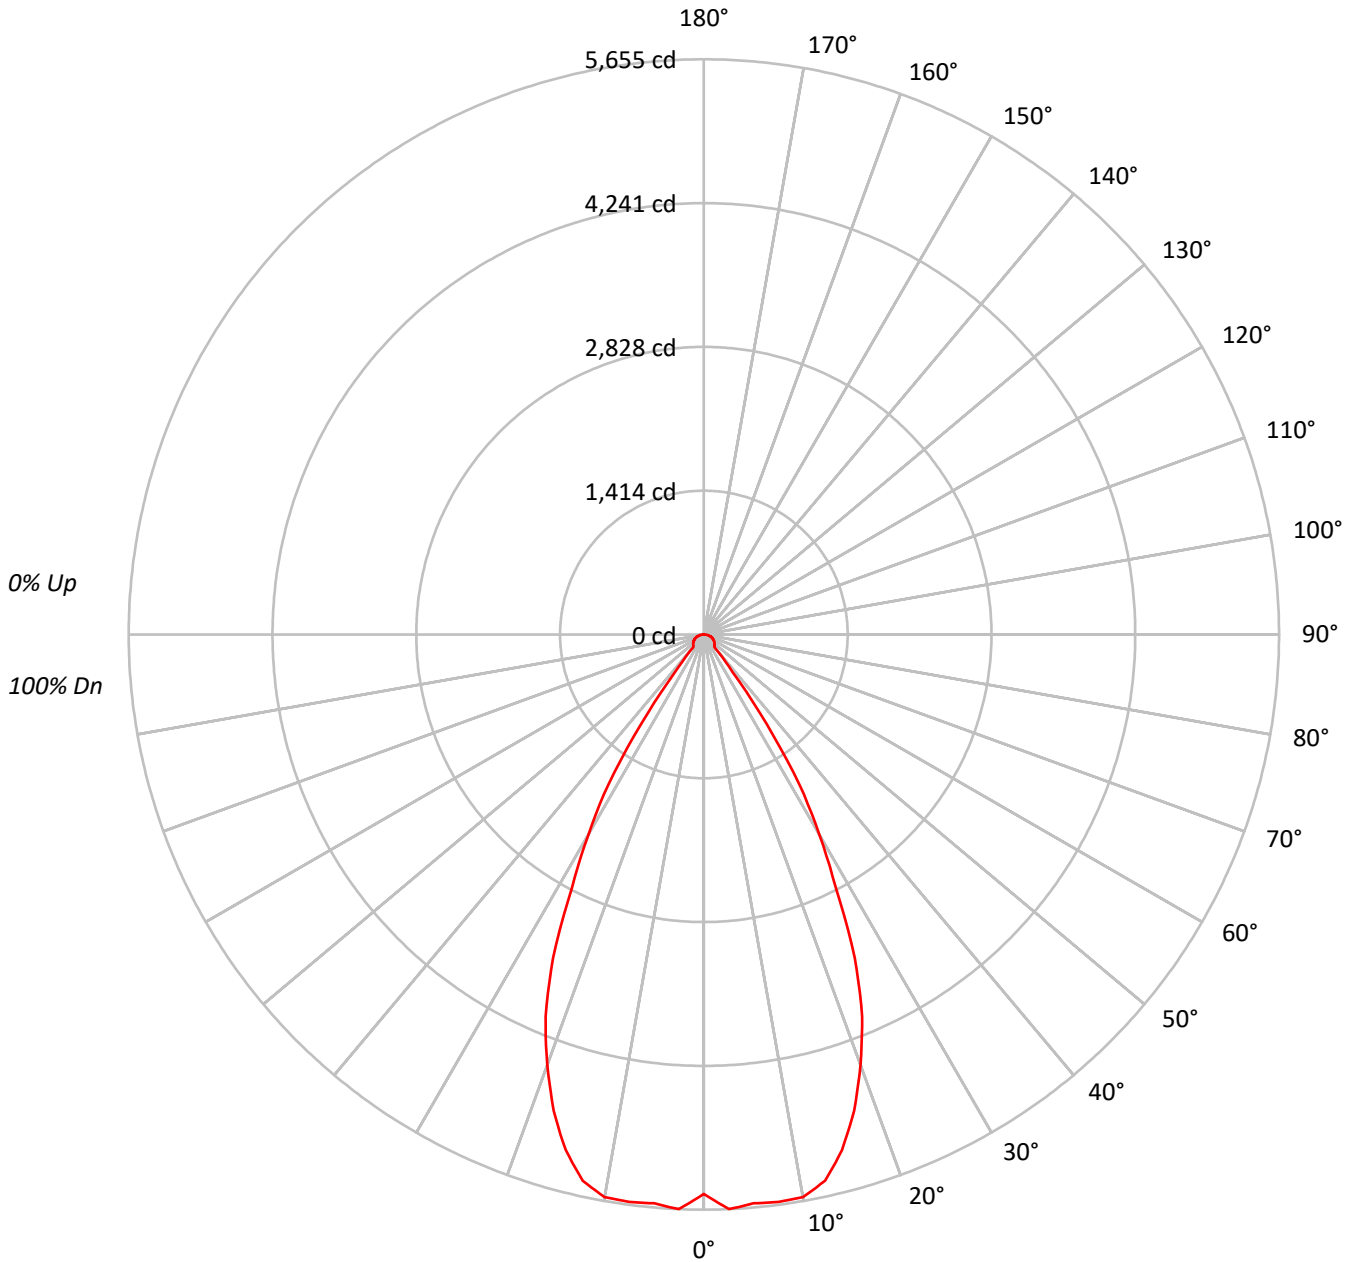



TEST NUMBER: P750396

CATALOG NUMBER: LD4D55D010-EU4DR6055659040-4LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	600989
5°	615766
10°	623196
15°	593684
20°	523449
25°	423380
30°	286378
35°	143507
40°	23277
45°	22791
50°	23236
55°	23583
60°	24256
65°	24793
70°	25397
75°	25667
80°	24791
85°	20685

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 25667 cd/sqm



TEST NUMBER: P750396

CATALOG NUMBER: LD4D55D010-EU4DR6055659040-4LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	536.6	11.6
10°-20°	1451.8	31.3
20°-30°	1562.0	33.7
30°-40°	679.0	14.7
40°-50°	114.0	2.5
50°-60°	110.9	2.4
60°-70°	94.8	2.0
70°-80°	63.5	1.4
80°-90°	19.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3550.3	76.7
0°-40°	4229.3	91.3
0°-60°	4454.2	96.2
0°-90°	4631.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4631.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5500	
5°	5614	537
15°	5248	1452
25°	3512	1562
35°	1076	679
45°	148	114
55°	124	111
65°	96	95
75°	61	63
85°	16	19
90°	0	



TEST NUMBER: P750396

CATALOG NUMBER: LD4D55D010-EU4DR6055659040-4LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5500.5
2.5°	5655.1
5°	5614.3
7.5°	5627.2
10°	5617.1
12.5°	5501.2
15°	5248.5
17.5°	4909.2
20°	4501.9
22.5°	4065.9
25°	3511.9
27.5°	2808.9
30°	2269.9
32.5°	1749.5
35°	1075.9
37.5°	460.3
40°	163.2
42.5°	150.3
45°	147.5
47.5°	142.5
50°	136.7
52.5°	130.3
55°	123.8
57.5°	117.4
60°	111.0
62.5°	103.8
65°	95.9
67.5°	88.0
70°	79.5
72.5°	70.2
75°	60.8
77.5°	50.1
80°	39.4
82.5°	27.9
85°	16.5
87.5°	5.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)