

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P750166

Luminaire Tested: LD4D55D010-EU4DR4555659050-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P750166  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D55D010-EU4DR4555659050-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5766.6 lumens  
Efficiency: N/A  
Efficacy: 99.1 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 58.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P750166  
CATALOG NUMBER: LD4D55D010-EU4DR4555659050-4LBCSSQMW

### Luminous Intensity Polar Plot

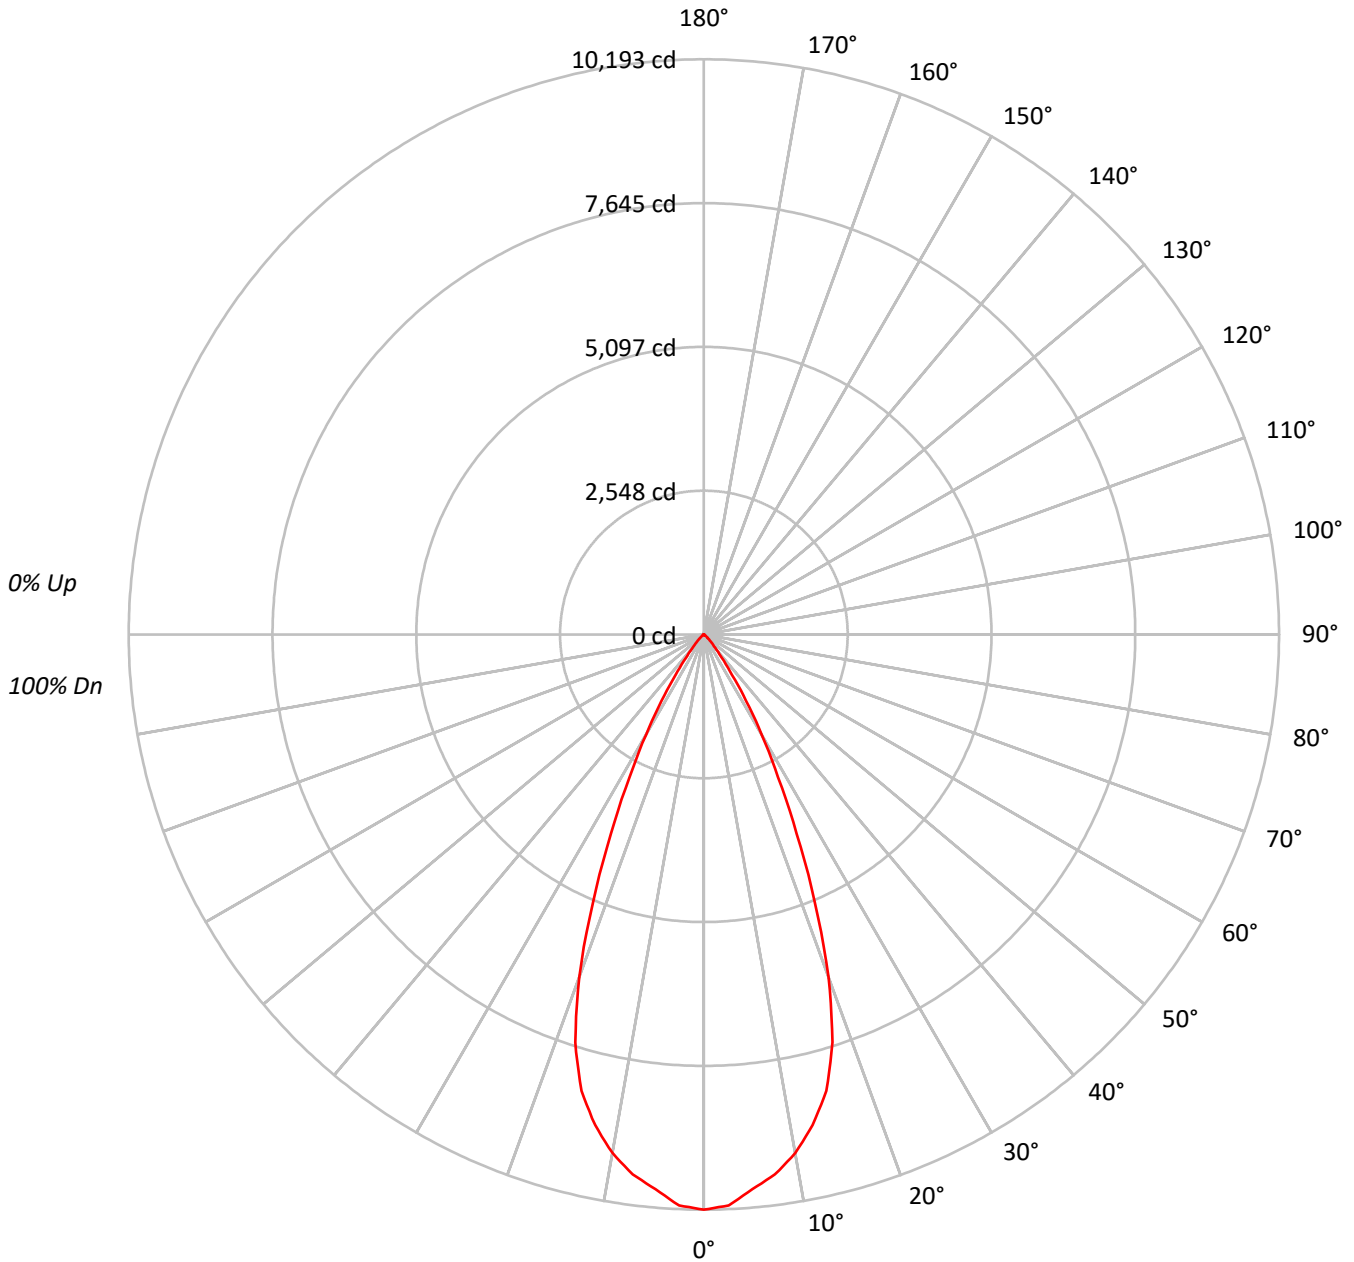



TEST NUMBER: P750166

CATALOG NUMBER: LD4D55D010-EU4DR4555659050-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	98	98	97	95						95													
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	91	90						90													
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	89	87	85						85													
4	100	94	89	85	99	93	88	85	91	87	84	89	86	83	87	84	82	81						81													
5	96	89	84	80	95	88	83	80	86	82	79	85	81	79	83	80	78	77						77													
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73						73													
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	77	73	71	69						69													
8	85	77	72	68	84	76	71	68	75	71	68	74	70	67	73	70	67	66						66													
9	82	73	68	65	81	73	68	65	72	68	65	71	67	64	71	67	64	63						63													
10	79	70	65	62	78	70	65	62	69	65	62	68	64	61	68	64	61	60						60													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1113662
5°	1081953
10°	1035140
15°	947373
20°	751599
25°	469228
30°	258622
35°	116123
40°	45741
45°	21555
50°	10216
55°	5353
60°	2622
65°	620
70°	256
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21555 cd/sqm



TEST NUMBER: P750166

CATALOG NUMBER: LD4D55D010-EU4DR4555659050-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	926.9	16.1
10°-20°	2281.2	39.6
20°-30°	1806.5	31.3
30°-40°	601.6	10.4
40°-50°	119.4	2.1
50°-60°	27.1	0.5
60°-70°	3.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5014.6	87.0
0°-40°	5616.1	97.4
0°-60°	5762.6	99.9
0°-90°	5766.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5766.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10193	
5°	9865	927
15°	8375	2281
25°	3892	1806
35°	871	602
45°	140	119
55°	28	27
65°	2	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P750166

CATALOG NUMBER: LD4D55D010-EU4DR4555659050-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	10192.7
2.5°	10126.2
5°	9864.8
7.5°	9649.2
10°	9330.1
12.5°	8905.2
15°	8375.3
17.5°	7578.4
20°	6464.1
22.5°	5136.5
25°	3892.2
27.5°	2850.0
30°	2049.9
32.5°	1394.1
35°	870.6
37.5°	516.3
40°	320.7
42.5°	210.8
45°	139.5
47.5°	89.8
50°	60.1
52.5°	40.1
55°	28.1
57.5°	18.4
60°	12.0
62.5°	6.4
65°	2.4
67.5°	0.8
70°	0.8
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)