

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751294

Luminaire Tested: LD4D60D010-EU4DR7055659027-4LBSQW1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P751294  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D60D010-EU4DR7055659027-4LBSQW1MW  
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4849.8 lumens  
Efficiency: N/A  
Efficacy: 75.3 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 64.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P751294

CATALOG NUMBER: LD4D60D010-EU4DR7055659027-4LBSQW1MW

### Luminous Intensity Polar Plot

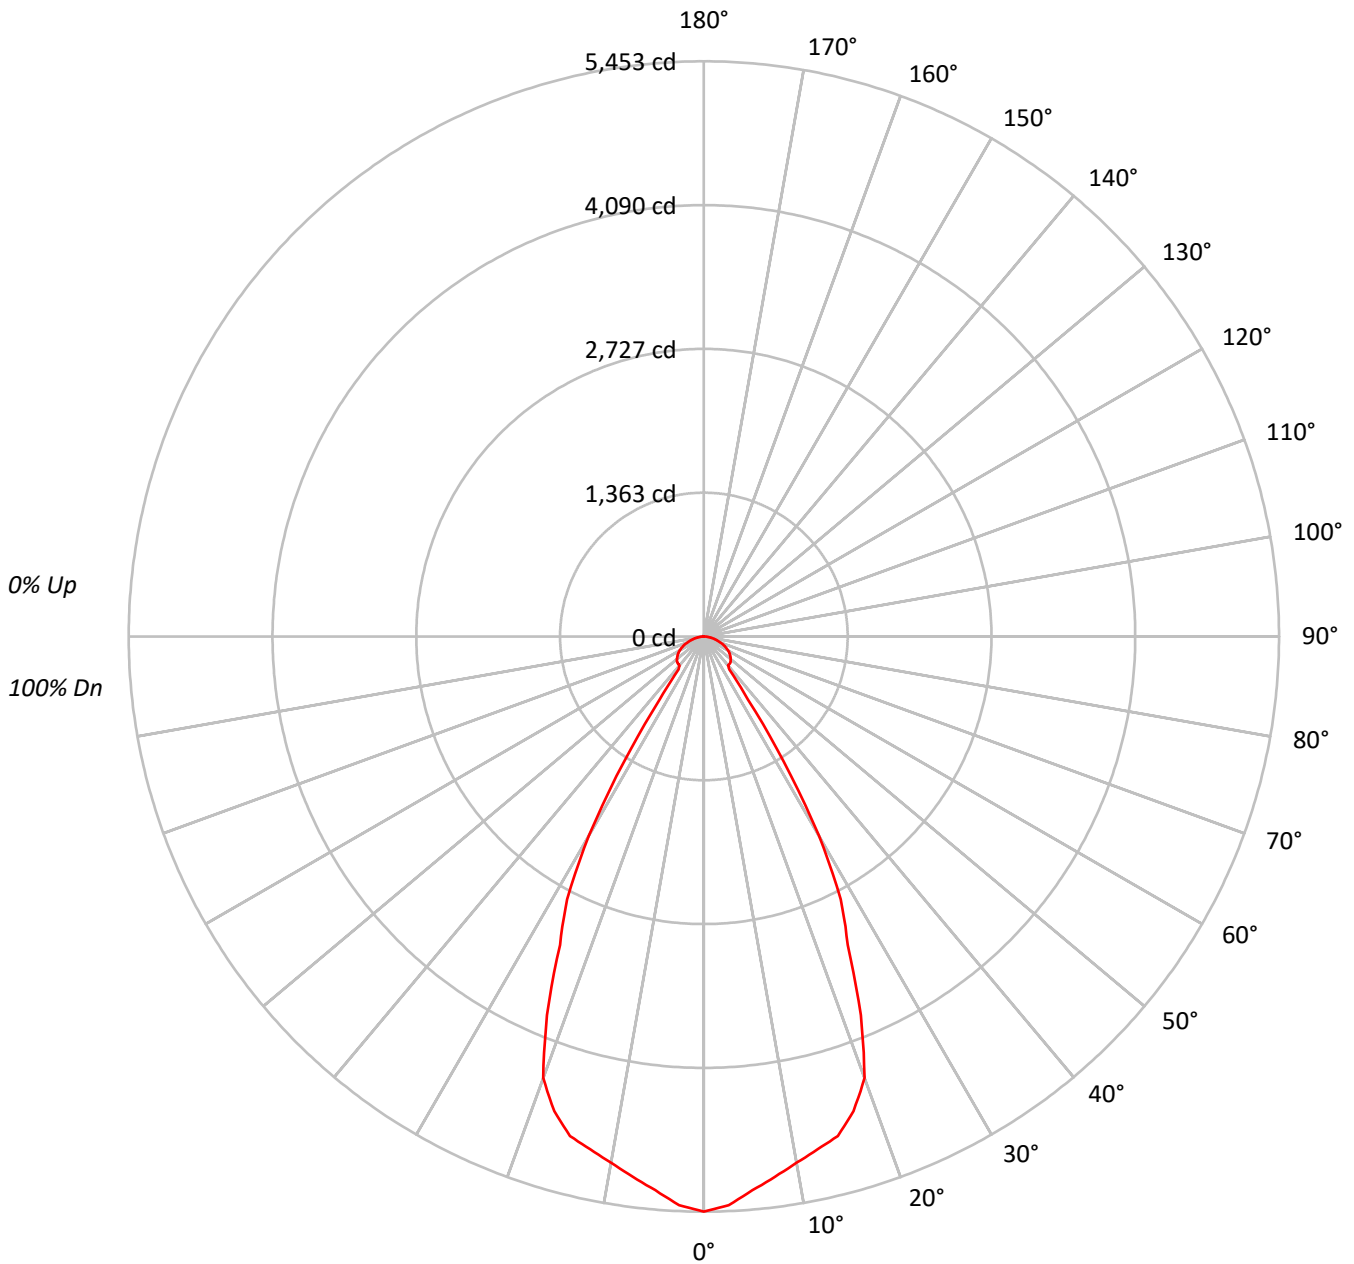



TEST NUMBER: P751294

CATALOG NUMBER: LD4D60D010-EU4DR7055659027-4LBSQW1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	595755
5°	578048
10°	561943
15°	554569
20°	517844
25°	389034
30°	275011
35°	97409
40°	51218
45°	54560
50°	56501
55°	57566
60°	57908
65°	56696
70°	53509
75°	49561
80°	43982
85°	35728

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 57935 cd/sqm



TEST NUMBER: P751294

CATALOG NUMBER: LD4D60D010-EU4DR7055659027-4LBSQW1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	497.1	10.3
10°-20°	1363.6	28.1
20°-30°	1501.8	31.0
30°-40°	573.8	11.8
40°-50°	270.9	5.6
50°-60°	269.4	5.6
60°-70°	215.7	4.4
70°-80°	124.0	2.6
80°-90°	33.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3362.5	69.3
0°-40°	3936.2	81.2
0°-60°	4476.5	92.3
0°-90°	4849.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4849.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5453	
5°	5270	497
15°	4903	1364
25°	3227	1502
35°	730	574
45°	353	271
55°	302	269
65°	219	216
75°	117	124
85°	28	34
90°	0	



TEST NUMBER: P751294

CATALOG NUMBER: LD4D60D010-EU4DR7055659027-4LBSQW1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	5452.6
2.5°	5395.6
5°	5270.4
7.5°	5166.0
10°	5065.0
12.5°	4979.5
15°	4902.7
17.5°	4717.0
20°	4453.7
22.5°	3885.7
25°	3227.0
27.5°	2809.2
30°	2179.8
32.5°	1408.0
35°	730.3
37.5°	394.5
40°	359.1
42.5°	356.5
45°	353.1
47.5°	345.3
50°	332.4
52.5°	317.7
55°	302.2
57.5°	284.9
60°	265.0
62.5°	242.6
65°	219.3
67.5°	193.4
70°	167.5
72.5°	141.6
75°	117.4
77.5°	92.4
80°	69.9
82.5°	49.2
85°	28.5
87.5°	11.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)