

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751319

Luminaire Tested: LD4D60D010-EU4DR7055659035-4LBSQW1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P751319  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D60D010-EU4DR7055659035-4LBSQW1B  
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3791.0 lumens  
Efficiency: N/A  
Efficacy: 58.9 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 64.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P751319

CATALOG NUMBER: LD4D60D010-EU4DR7055659035-4LBSQW1B

### Luminous Intensity Polar Plot

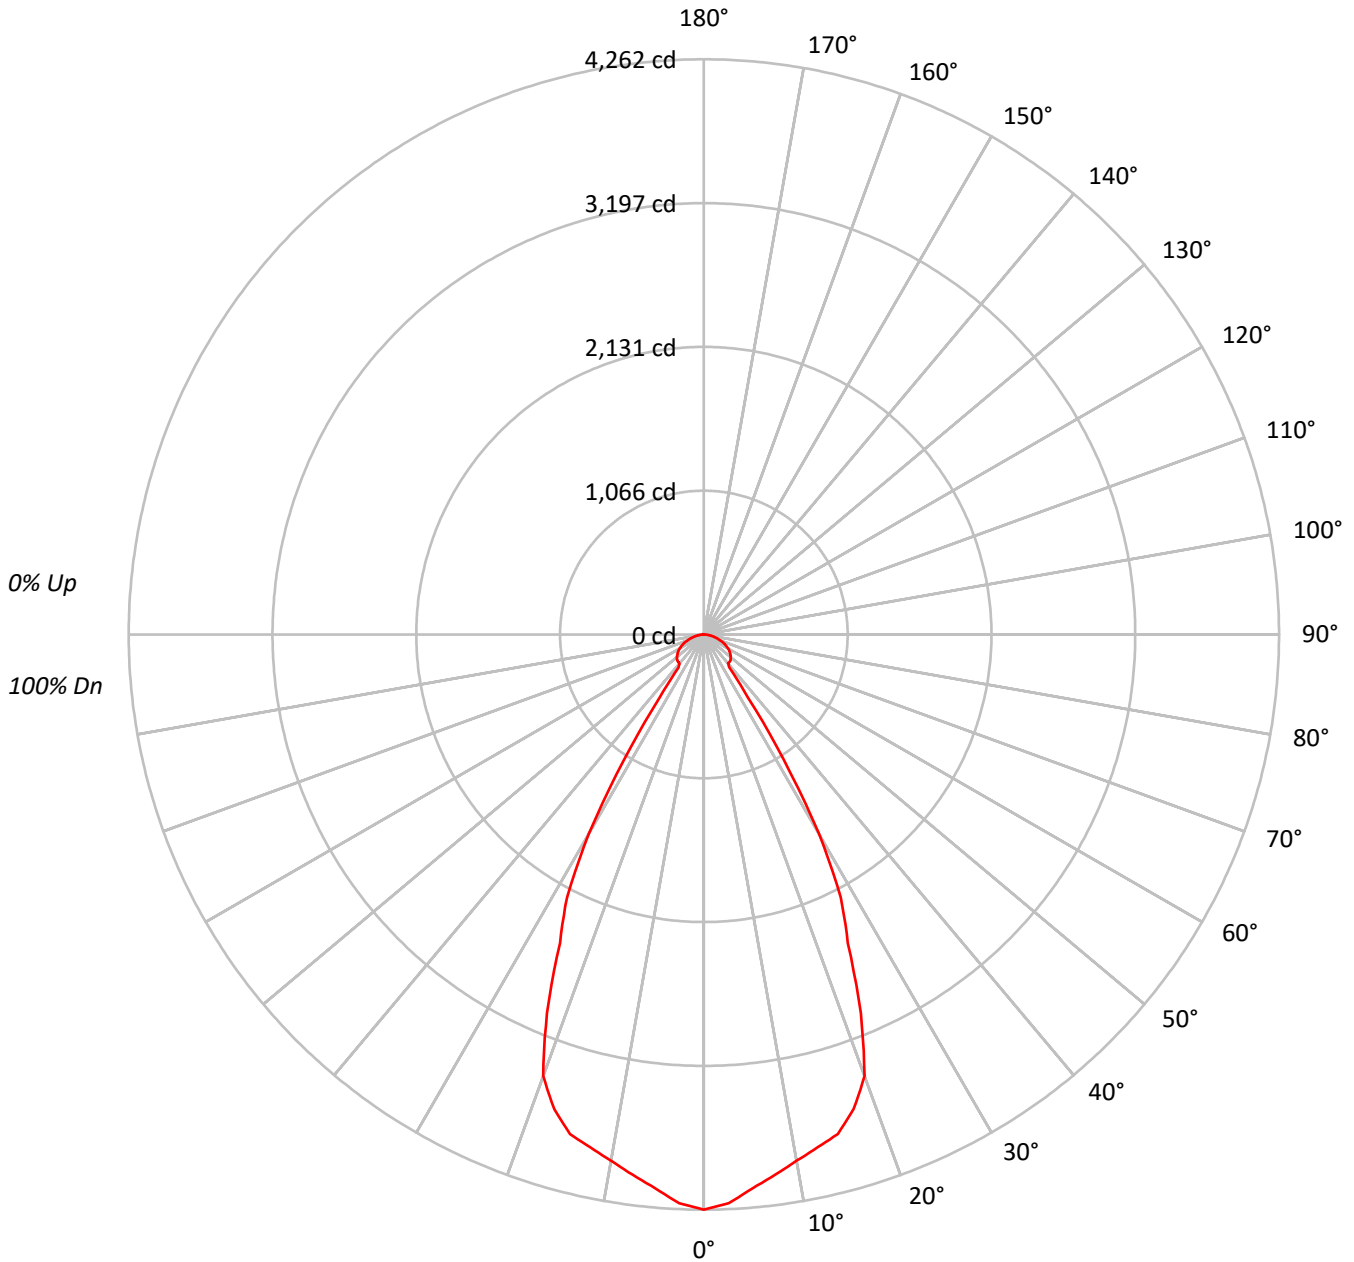



TEST NUMBER: P751319

CATALOG NUMBER: LD4D60D010-EU4DR7055659035-4LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	465691
5°	451852
10°	439259
15°	433491
20°	404792
25°	304102
30°	214970
35°	76148
40°	40036
45°	42647
50°	44161
55°	44994
60°	45278
65°	44313
70°	41817
75°	38753
80°	34418
85°	27956

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 45286 cd/sqm



TEST NUMBER: P751319

CATALOG NUMBER: LD4D60D010-EU4DR7055659035-4LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	388.6	10.3
10°-20°	1065.9	28.1
20°-30°	1173.9	31.0
30°-40°	448.5	11.8
40°-50°	211.8	5.6
50°-60°	210.5	5.6
60°-70°	168.6	4.4
70°-80°	96.9	2.6
80°-90°	26.4	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2628.4	69.3
0°-40°	3076.9	81.2
0°-60°	3499.2	92.3
0°-90°	3791.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3791.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4262	
5°	4120	389
15°	3832	1066
25°	2522	1174
35°	571	449
45°	276	212
55°	236	211
65°	171	169
75°	92	97
85°	22	26
90°	0	



TEST NUMBER: P751319

CATALOG NUMBER: LD4D60D010-EU4DR7055659035-4LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4262.2
2.5°	4217.6
5°	4119.8
7.5°	4038.1
10°	3959.2
12.5°	3892.4
15°	3832.3
17.5°	3687.2
20°	3481.4
22.5°	3037.4
25°	2522.5
27.5°	2195.9
30°	1703.9
32.5°	1100.6
35°	570.9
37.5°	308.4
40°	280.7
42.5°	278.7
45°	276.0
47.5°	269.9
50°	259.8
52.5°	248.3
55°	236.2
57.5°	222.7
60°	207.2
62.5°	189.6
65°	171.4
67.5°	151.2
70°	130.9
72.5°	110.7
75°	91.8
77.5°	72.2
80°	54.7
82.5°	38.5
85°	22.3
87.5°	8.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)