

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751020

Luminaire Tested: LD4D60D010-EU4DR5055659040-4LBSQW1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P751020
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-44)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR5055659040-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 50° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5760.3 lumens
Efficiency: N/A
Efficacy: 89.4 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.73
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P751020

CATALOG NUMBER: LD4D60D010-EU4DR5055659040-4LBSQW1B

Luminous Intensity Polar Plot

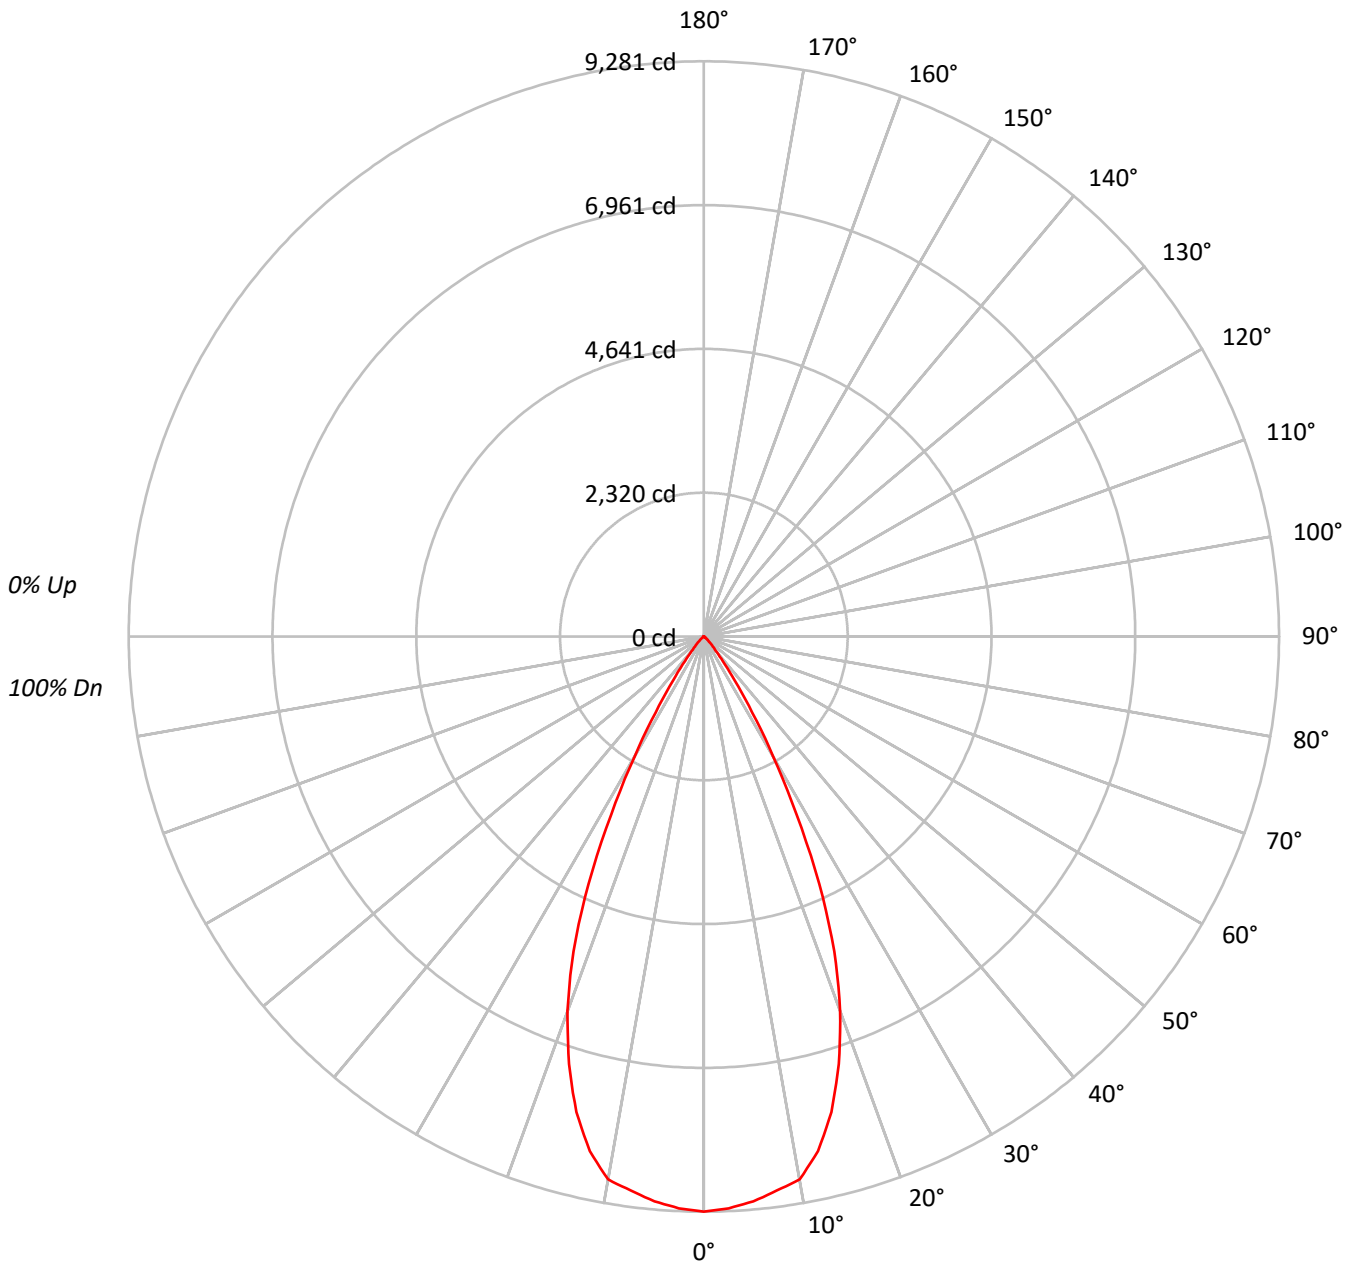



TEST NUMBER: P751020

CATALOG NUMBER: LD4D60D010-EU4DR5055659040-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	114	112	109	107	112	110	108	106	106	104	102	102	101	99	98	97	97	95			95
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90			90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85			85
4	100	94	89	85	99	93	88	85	90	87	84	89	85	83	87	84	82	80			80
5	96	89	84	80	95	88	83	79	86	82	79	85	81	78	83	80	77	76			76
6	92	84	79	75	91	83	79	75	82	78	74	81	77	74	79	76	74	72			72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69			69
8	85	76	71	67	84	76	71	67	75	70	67	74	70	67	73	69	66	65			65
9	81	73	68	64	80	72	67	64	71	67	64	71	67	64	70	66	63	62			62
10	78	70	64	61	77	69	64	61	68	64	61	68	64	61	67	63	60	59			59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1014082
5°	1003445
10°	986923
15°	898677
20°	747797
25°	530832
30°	280966
35°	114496
40°	42518
45°	19469
50°	7989
55°	4172
60°	2054
65°	595
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19469 cd/sqm



TEST NUMBER: P751020

CATALOG NUMBER: LD4D60D010-EU4DR5055659040-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	864.8	15.0
10°-20°	2185.5	37.9
20°-30°	1963.1	34.1
30°-40°	614.6	10.7
40°-50°	107.6	1.9
50°-60°	21.5	0.4
60°-70°	3.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5013.3	87.0
0°-40°	5628.0	97.7
0°-60°	5757.1	99.9
0°-90°	5760.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5760.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9281	
5°	9149	865
15°	7945	2185
25°	4403	1963
35°	858	615
45°	126	108
55°	22	21
65°	2	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P751020

CATALOG NUMBER: LD4D60D010-EU4DR5055659040-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	9281.3
2.5°	9235.1
5°	9149.0
7.5°	9017.6
10°	8895.5
12.5°	8504.3
15°	7944.8
17.5°	7234.3
20°	6431.4
22.5°	5502.6
25°	4403.2
27.5°	3237.2
30°	2227.0
32.5°	1450.0
35°	858.4
37.5°	493.0
40°	298.1
42.5°	194.1
45°	126.0
47.5°	76.7
50°	47.0
52.5°	32.1
55°	21.9
57.5°	14.9
60°	9.4
62.5°	5.5
65°	2.3
67.5°	0.8
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)