

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P751190

Luminaire Tested: LD4D60D010-EU4DR6055659050-4LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P751190
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D60D010-EU4DR6055659050-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5778.0 lumens
Efficiency: N/A
Efficacy: 89.7 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P751190
CATALOG NUMBER: LD4D60D010-EU4DR6055659050-4LBSQW1MW

Luminous Intensity Polar Plot

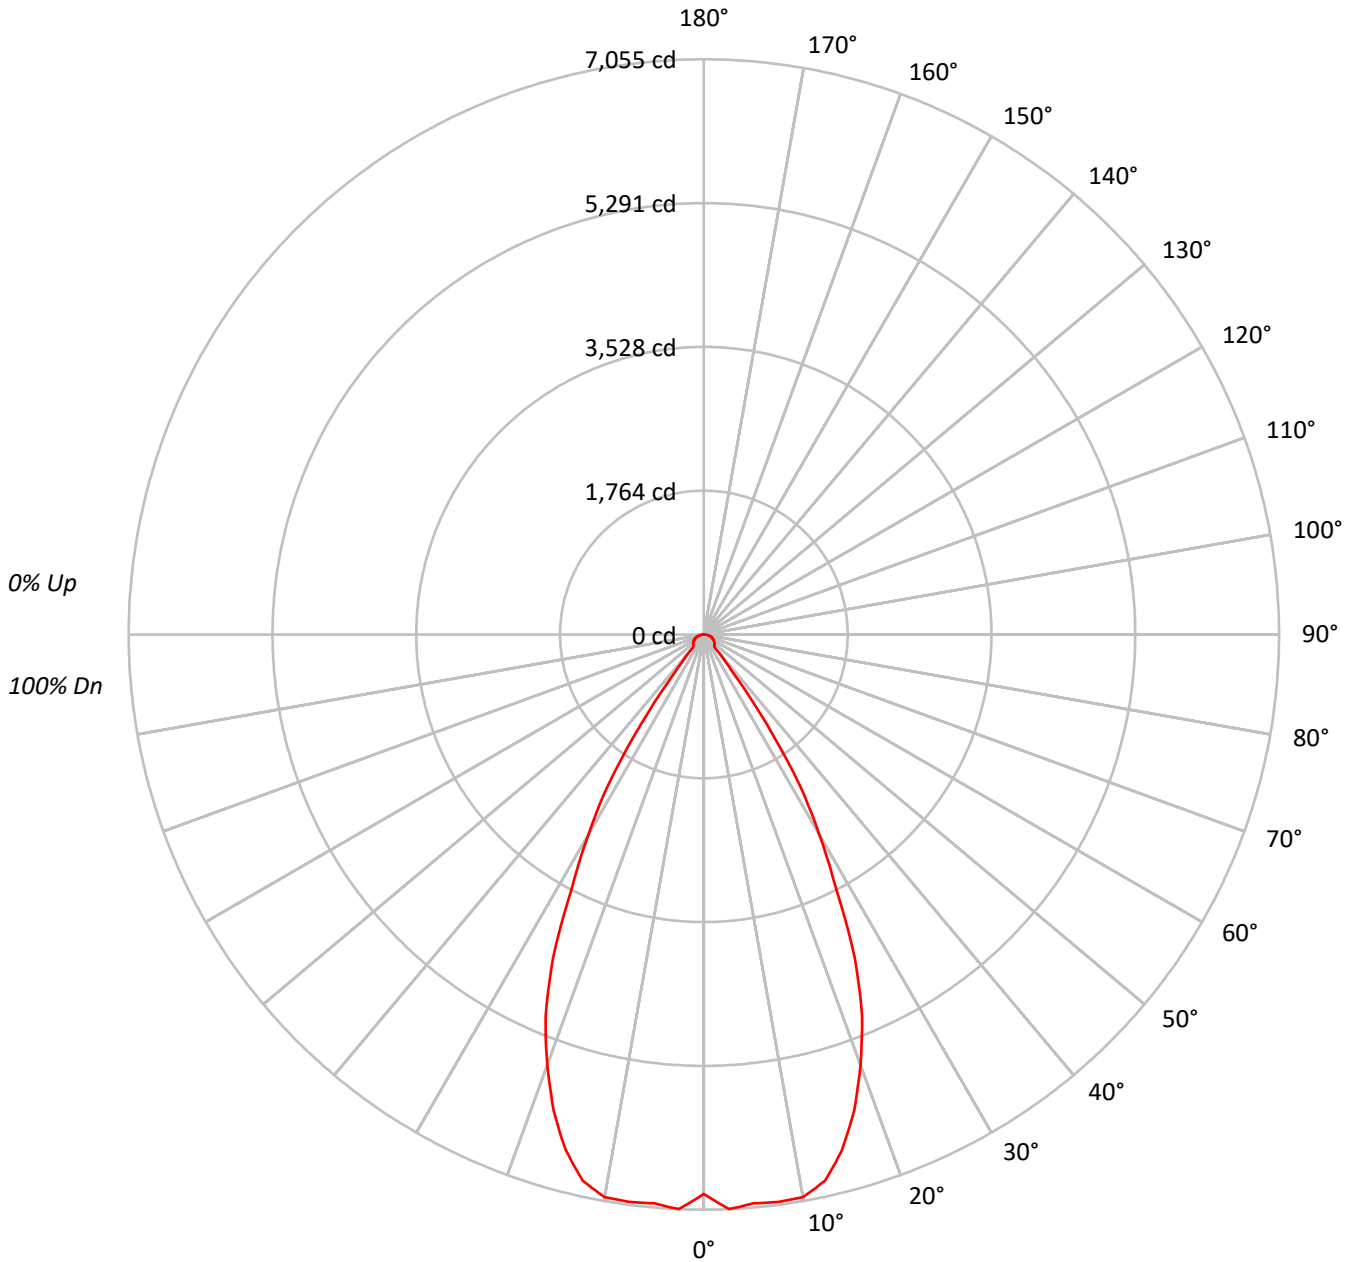



TEST NUMBER: P751190

CATALOG NUMBER: LD4D60D010-EU4DR6055659050-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	749769
5°	768207
10°	777478
15°	740655
20°	653035
25°	528192
30°	357270
35°	179026
40°	29039
45°	28431
50°	28999
55°	29431
60°	30243
65°	30946
70°	31658
75°	32041
80°	30894
85°	25699

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 32041 cd/sqm



TEST NUMBER: P751190

CATALOG NUMBER: LD4D60D010-EU4DR6055659050-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	669.4	11.6
10°-20°	1811.2	31.3
20°-30°	1948.7	33.7
30°-40°	847.0	14.7
40°-50°	142.3	2.5
50°-60°	138.3	2.4
60°-70°	118.3	2.0
70°-80°	79.2	1.4
80°-90°	23.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4429.2	76.7
0°-40°	5276.3	91.3
0°-60°	5556.9	96.2
0°-90°	5778.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5778.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6862	
5°	7004	669
15°	6548	1811
25°	4381	1949
35°	1342	847
45°	184	142
55°	154	138
65°	120	118
75°	76	79
85°	20	24
90°	0	



TEST NUMBER: P751190

CATALOG NUMBER: LD4D60D010-EU4DR6055659050-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	6862.2
2.5°	7055.1
5°	7004.2
7.5°	7020.2
10°	7007.7
12.5°	6863.1
15°	6547.8
17.5°	6124.5
20°	5616.4
22.5°	5072.5
25°	4381.3
27.5°	3504.3
30°	2831.8
32.5°	2182.6
35°	1342.2
37.5°	574.2
40°	203.6
42.5°	187.5
45°	184.0
47.5°	177.7
50°	170.6
52.5°	162.5
55°	154.5
57.5°	146.5
60°	138.4
62.5°	129.5
65°	119.7
67.5°	109.8
70°	99.1
72.5°	87.5
75°	75.9
77.5°	62.5
80°	49.1
82.5°	34.8
85°	20.5
87.5°	7.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)