

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752752

Luminaire Tested: LD4D70BD010-EU4DR6570959024-4LBCSSQMMS

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P752752  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D70BD010-EU4DR6570959024-4LBCSSQMMMS  
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5114.5 lumens  
Efficiency: N/A  
Efficacy: 76.8 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 66.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P752752  
CATALOG NUMBER: LD4D70BD010-EU4DR6570959024-4LBCSSQMMS

### Luminous Intensity Polar Plot

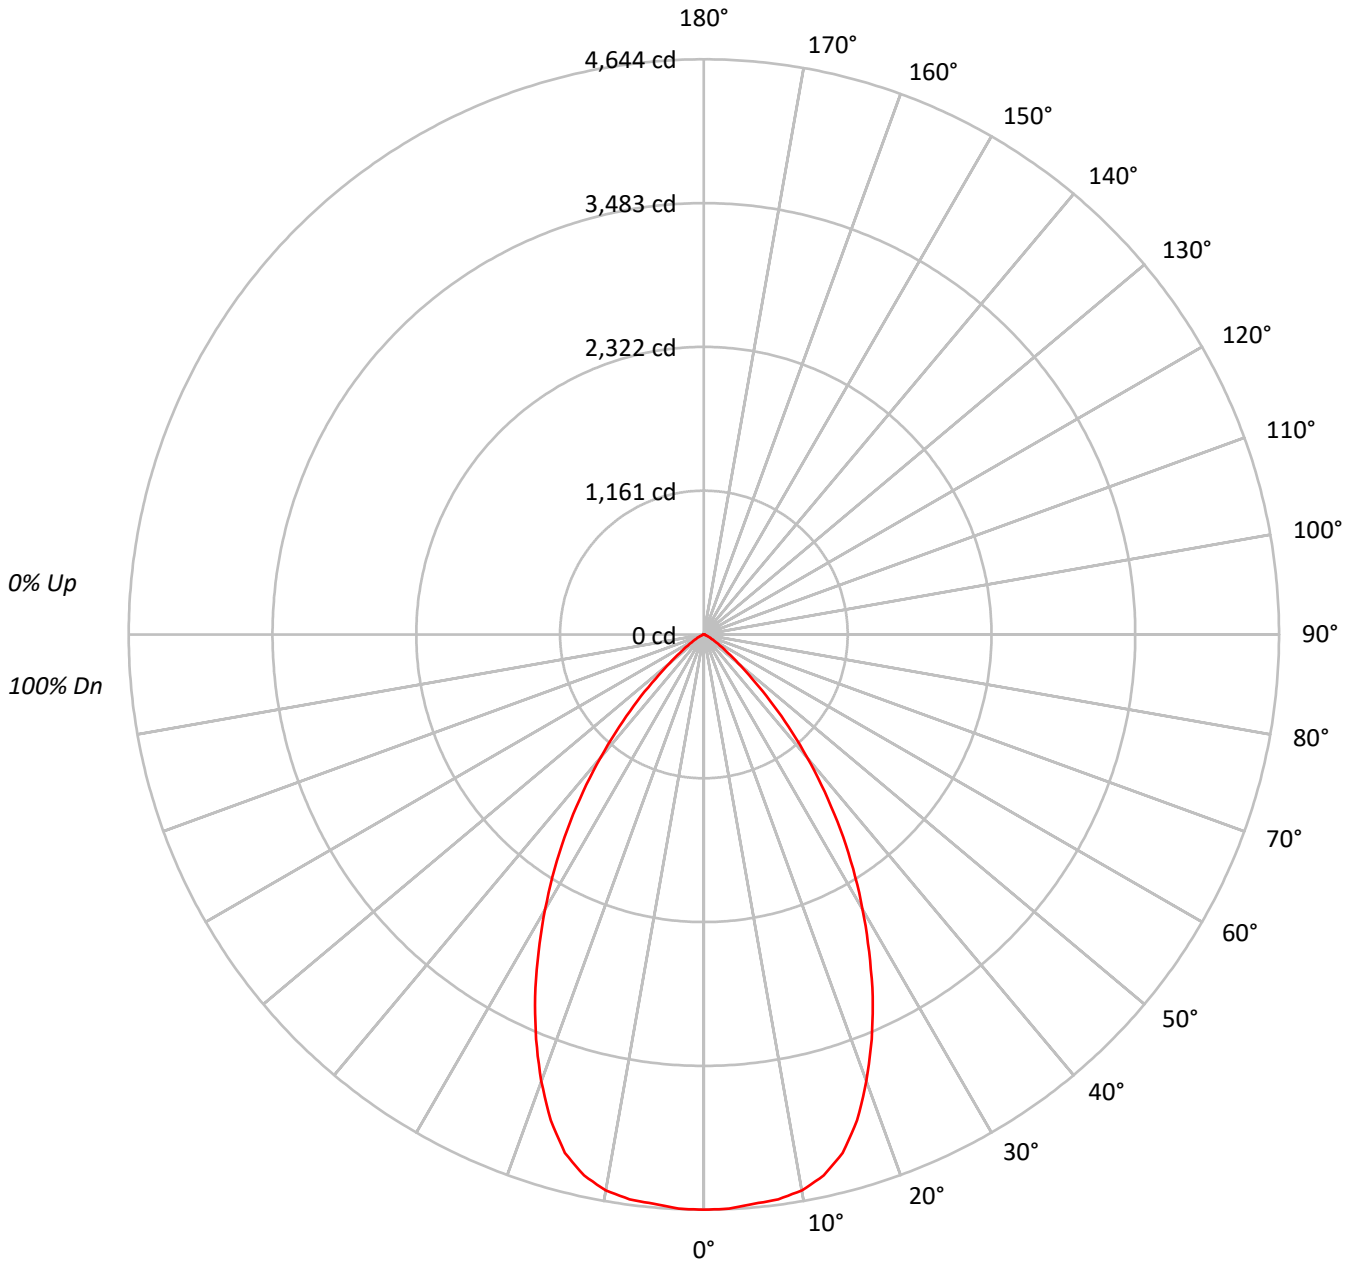



TEST NUMBER: P752752

CATALOG NUMBER: LD4D70BD010-EU4DR6570959024-4LBCSSQMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93				93															
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85				85															
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78				78															
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72				72															
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66				66															
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61				61															
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56				56															
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52				52															
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49				49															
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46				46															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	271222
5°	270534
10°	270306
15°	261973
20°	238496
25°	207830
30°	172860
35°	136963
40°	98854
45°	62450
50°	32555
55°	17300
60°	9088
65°	5003
70°	2100
75°	2302
80°	1614
85°	1340

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 62450 cd/sqm



TEST NUMBER: P752752

CATALOG NUMBER: LD4D70BD010-EU4DR6570959024-4LBCSSQMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	439.2	8.6
10°-20°	1202.6	23.5
20°-30°	1470.0	28.7
30°-40°	1192.7	23.3
40°-50°	594.3	11.6
50°-60°	165.8	3.2
60°-70°	37.7	0.7
70°-80°	9.8	0.2
80°-90°	2.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3111.8	60.8
0°-40°	4304.5	84.2
0°-60°	5064.6	99.0
0°-90°	5114.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5114.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4644	
5°	4614	439
15°	4333	1203
25°	3225	1470
35°	1921	1193
45°	756	594
55°	170	166
65°	36	38
75°	10	10
85°	2	3
90°	0	



TEST NUMBER: P752752

CATALOG NUMBER: LD4D70BD010-EU4DR6570959024-4LBCSSQMMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4643.9
2.5°	4640.5
5°	4614.5
7.5°	4599.5
10°	4557.9
12.5°	4473.3
15°	4332.7
17.5°	4113.0
20°	3837.3
22.5°	3539.7
25°	3225.1
27.5°	2888.7
30°	2563.2
32.5°	2241.8
35°	1921.0
37.5°	1601.0
40°	1296.6
42.5°	1011.3
45°	756.1
47.5°	526.8
50°	358.3
52.5°	247.0
55°	169.9
57.5°	114.6
60°	77.8
62.5°	53.9
65°	36.2
67.5°	18.4
70°	12.3
72.5°	11.6
75°	10.2
77.5°	6.8
80°	4.8
82.5°	3.4
85°	2.0
87.5°	1.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)