

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752804

Luminaire Tested: LD4D70BD010-EU4DR6570959040-4LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P752804
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D70BD010-EU4DR6570959040-4LBCSSQMMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6313.6 lumens
Efficiency: N/A
Efficacy: 94.8 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P752804
CATALOG NUMBER: LD4D70BD010-EU4DR6570959040-4LBCSSQMMS

Luminous Intensity Polar Plot

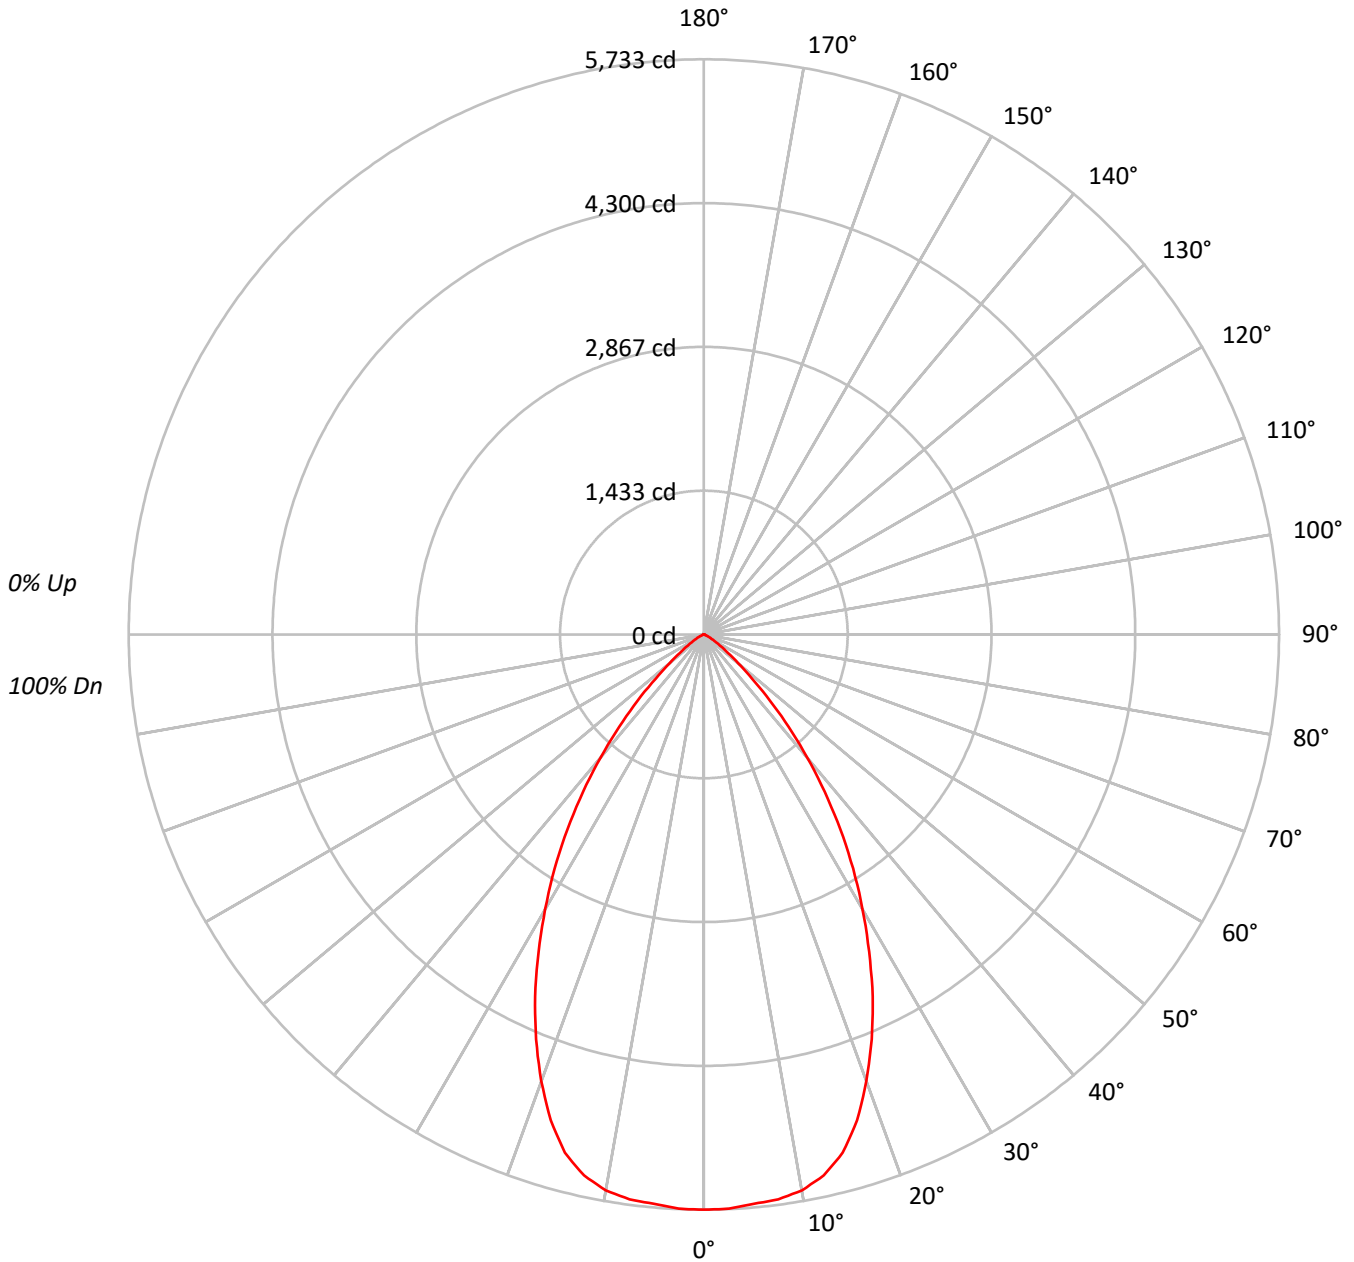



TEST NUMBER: P752804

CATALOG NUMBER: LD4D70BD010-EU4DR6570959040-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	334806
5°	333963
10°	333673
15°	323386
20°	294408
25°	256555
30°	213384
35°	169076
40°	122031
45°	77095
50°	40188
55°	21363
60°	11214
65°	6164
70°	2596
75°	2843
80°	1984
85°	1675

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 77095 cd/sqm



TEST NUMBER: P752804

CATALOG NUMBER: LD4D70BD010-EU4DR6570959040-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	542.1	8.6
10°-20°	1484.5	23.5
20°-30°	1814.6	28.7
30°-40°	1472.3	23.3
40°-50°	733.7	11.6
50°-60°	204.7	3.2
60°-70°	46.5	0.7
70°-80°	12.1	0.2
80°-90°	3.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3841.3	60.8
0°-40°	5313.6	84.2
0°-60°	6251.9	99.0
0°-90°	6313.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6313.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5733	
5°	5696	542
15°	5348	1485
25°	3981	1815
35°	2371	1472
45°	933	734
55°	210	205
65°	45	46
75°	13	12
85°	2	3
90°	0	



TEST NUMBER: P752804

CATALOG NUMBER: LD4D70BD010-EU4DR6570959040-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	5732.6
2.5°	5728.4
5°	5696.4
7.5°	5677.8
10°	5626.4
12.5°	5522.0
15°	5348.4
17.5°	5077.2
20°	4736.9
22.5°	4369.6
25°	3981.2
27.5°	3565.9
30°	3164.1
32.5°	2767.3
35°	2371.4
37.5°	1976.3
40°	1600.6
42.5°	1248.4
45°	933.4
47.5°	650.3
50°	442.3
52.5°	305.0
55°	209.8
57.5°	141.5
60°	96.0
62.5°	66.6
65°	44.6
67.5°	22.7
70°	15.2
72.5°	14.3
75°	12.6
77.5°	8.4
80°	5.9
82.5°	4.2
85°	2.5
87.5°	1.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)