

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P752907

Luminaire Tested: LD4D75BD010-EU4DR2570959024-4LBCSSQMB

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P752907
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR2570959024-4LBCSSQMB
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 25° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5048.7 lumens
Efficiency: N/A
Efficacy: 69.7 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P752907
CATALOG NUMBER: LD4D75BD010-EU4DR2570959024-4LBCSSQMB

Luminous Intensity Polar Plot

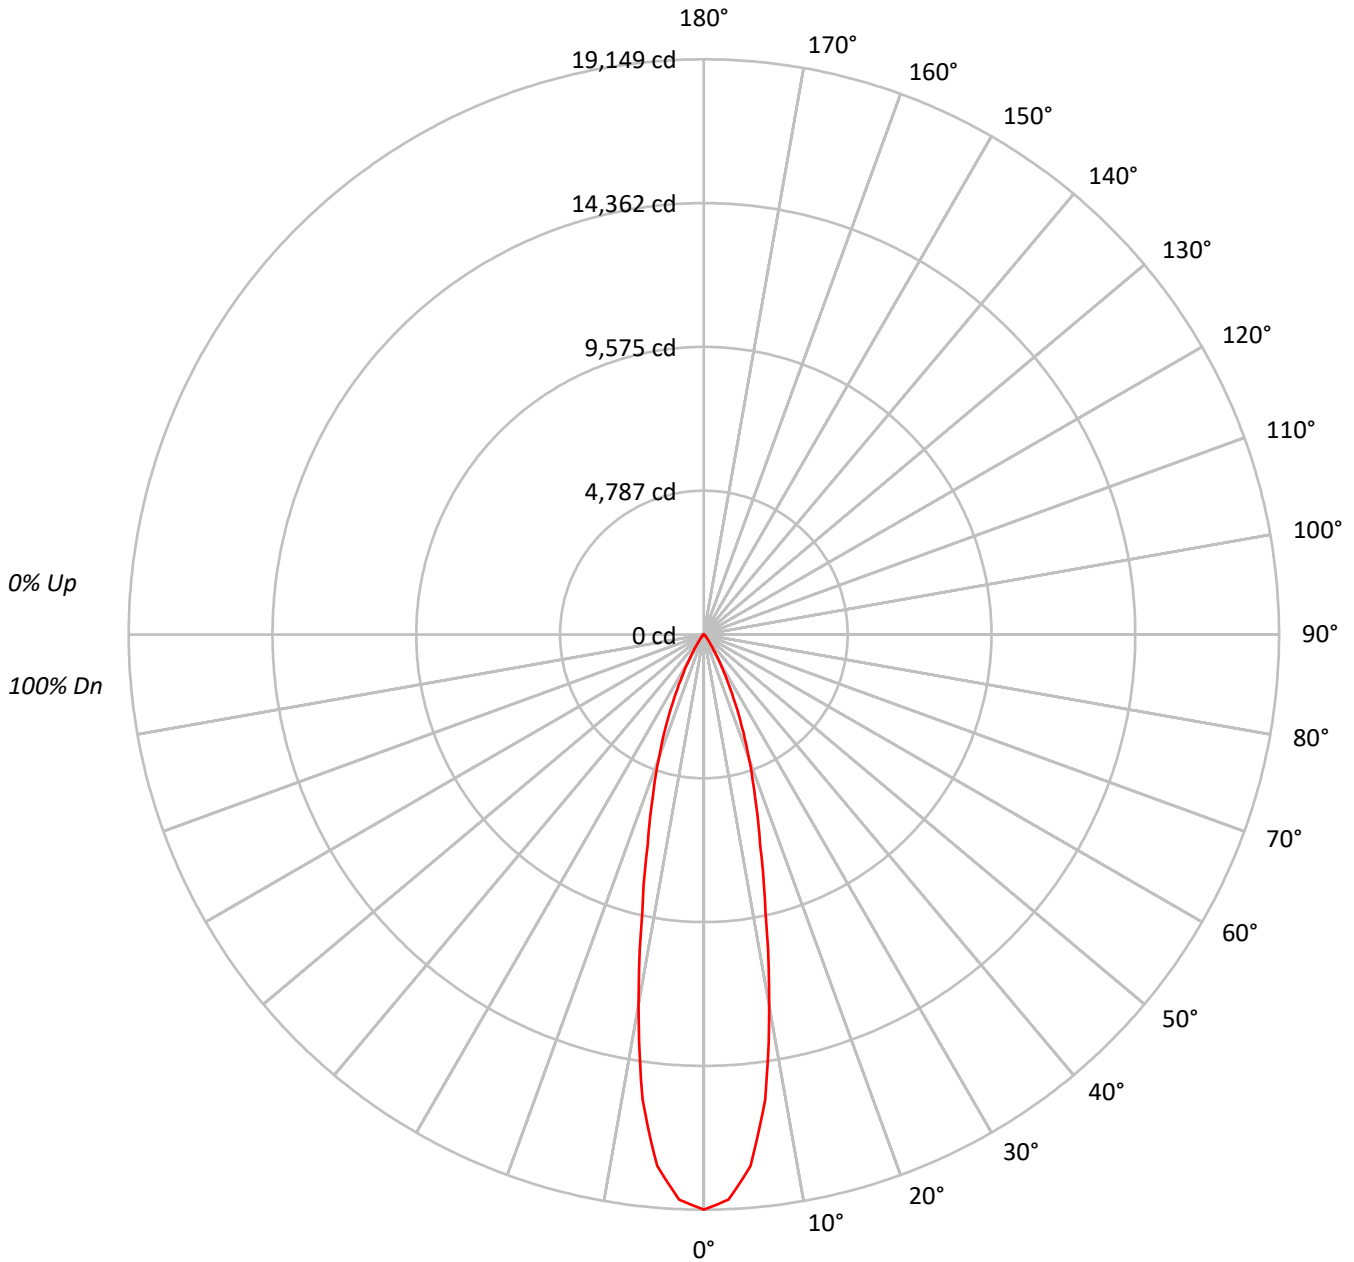



TEST NUMBER: P752907

CATALOG NUMBER: LD4D75BD010-EU4DR2570959024-4LBCSSQMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96		
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92		
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89		
4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85		
5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82		
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79		
7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77		
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74		
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72		
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2092212
5°	1948629
10°	1390013
15°	818659
20°	509380
25°	279545
30°	127841
35°	48418
40°	21922
45°	13180
50°	5473
55°	3524
60°	2469
65°	1655
70°	256
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 13180 cd/sqm



TEST NUMBER: P752907

CATALOG NUMBER: LD4D75BD010-EU4DR2570959024-4LBCSSQMB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1526.9	30.2
10°-20°	2068.1	41.0
20°-30°	1094.4	21.7
30°-40°	270.1	5.4
40°-50°	65.9	1.3
50°-60°	17.3	0.3
60°-70°	5.8	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4689.4	92.9
0°-40°	4959.5	98.2
0°-60°	5042.8	99.9
0°-90°	5048.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5048.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	19149	
5°	17767	###
15°	7237	2068
25°	2319	1094
35°	363	270
45°	85	66
55°	18	17
65°	6	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P752907

CATALOG NUMBER: LD4D75BD010-EU4DR2570959024-4LBCSSQMB

CANDELA DISTRIBUTION (FULL):

	0°
0°	19148.8
2.5°	18834.1
5°	17766.8
7.5°	15622.6
10°	12528.7
12.5°	9471.0
15°	7237.4
17.5°	5640.6
20°	4380.9
22.5°	3285.5
25°	2318.8
27.5°	1555.0
30°	1013.3
32.5°	616.5
35°	363.0
37.5°	222.1
40°	153.7
42.5°	117.5
45°	85.3
47.5°	51.5
50°	32.2
52.5°	23.3
55°	18.5
57.5°	14.5
60°	11.3
62.5°	8.9
65°	6.4
67.5°	2.4
70°	0.8
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)