

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753531

Luminaire Tested: LD4D75BD010-EU4DR6570959024-4LBCSSQMB

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P753531  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D75BD010-EU4DR6570959024-4LBCSSQMB  
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5405.7 lumens  
Efficiency: N/A  
Efficacy: 74.7 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 72.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P753531  
CATALOG NUMBER: LD4D75BD010-EU4DR6570959024-4LBCSSQMB

### Luminous Intensity Polar Plot

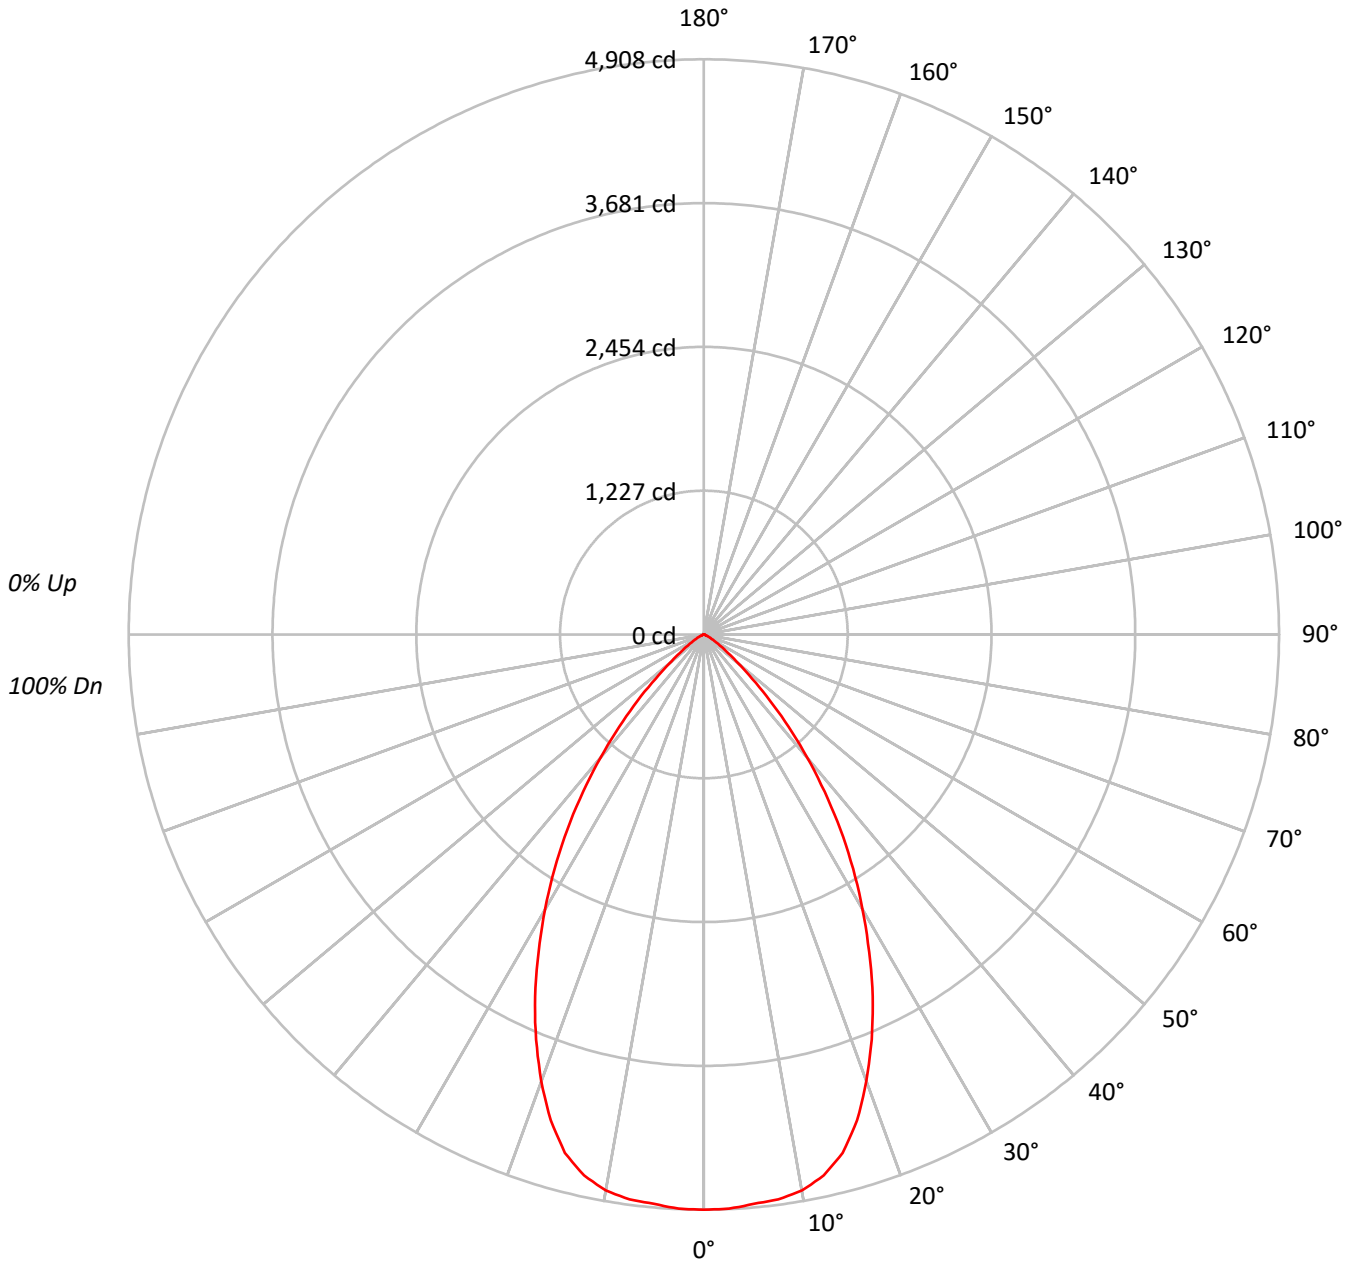



TEST NUMBER: P753531

CATALOG NUMBER: LD4D75BD010-EU4DR6570959024-4LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	286664
5°	285935
10°	285695
15°	276889
20°	252070
25°	219662
30°	182699
35°	144763
40°	104480
45°	66010
50°	34409
55°	18288
60°	9602
65°	5279
70°	2220
75°	2437
80°	1682
85°	1474

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 66010 cd/sqm



TEST NUMBER: P753531

CATALOG NUMBER: LD4D75BD010-EU4DR6570959024-4LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	464.2	8.6
10°-20°	1271.1	23.5
20°-30°	1553.7	28.7
30°-40°	1260.6	23.3
40°-50°	628.2	11.6
50°-60°	175.2	3.2
60°-70°	39.8	0.7
70°-80°	10.4	0.2
80°-90°	2.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3288.9	60.8
0°-40°	4549.5	84.2
0°-60°	5352.9	99.0
0°-90°	5405.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5405.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4908	
5°	4877	464
15°	4579	1271
25°	3409	1554
35°	2030	1261
45°	799	628
55°	180	175
65°	38	40
75°	11	10
85°	2	3
90°	0	



TEST NUMBER: P753531

CATALOG NUMBER: LD4D75BD010-EU4DR6570959024-4LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4908.3
2.5°	4904.7
5°	4877.2
7.5°	4861.4
10°	4817.4
12.5°	4727.9
15°	4579.4
17.5°	4347.1
20°	4055.7
22.5°	3741.2
25°	3408.7
27.5°	3053.1
30°	2709.1
32.5°	2369.4
35°	2030.4
37.5°	1692.1
40°	1370.4
42.5°	1068.9
45°	799.2
47.5°	556.8
50°	378.7
52.5°	261.1
55°	179.6
57.5°	121.2
60°	82.2
62.5°	57.0
65°	38.2
67.5°	19.5
70°	13.0
72.5°	12.3
75°	10.8
77.5°	7.2
80°	5.0
82.5°	3.6
85°	2.2
87.5°	1.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)