

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753568

Luminaire Tested: LD4D75BD010-EU4DR6570959030-4LBSQW1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P753568
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR6570959030-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4807.1 lumens
Efficiency: N/A
Efficacy: 66.4 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P753568
CATALOG NUMBER: LD4D75BD010-EU4DR6570959030-4LBSQW1B

Luminous Intensity Polar Plot

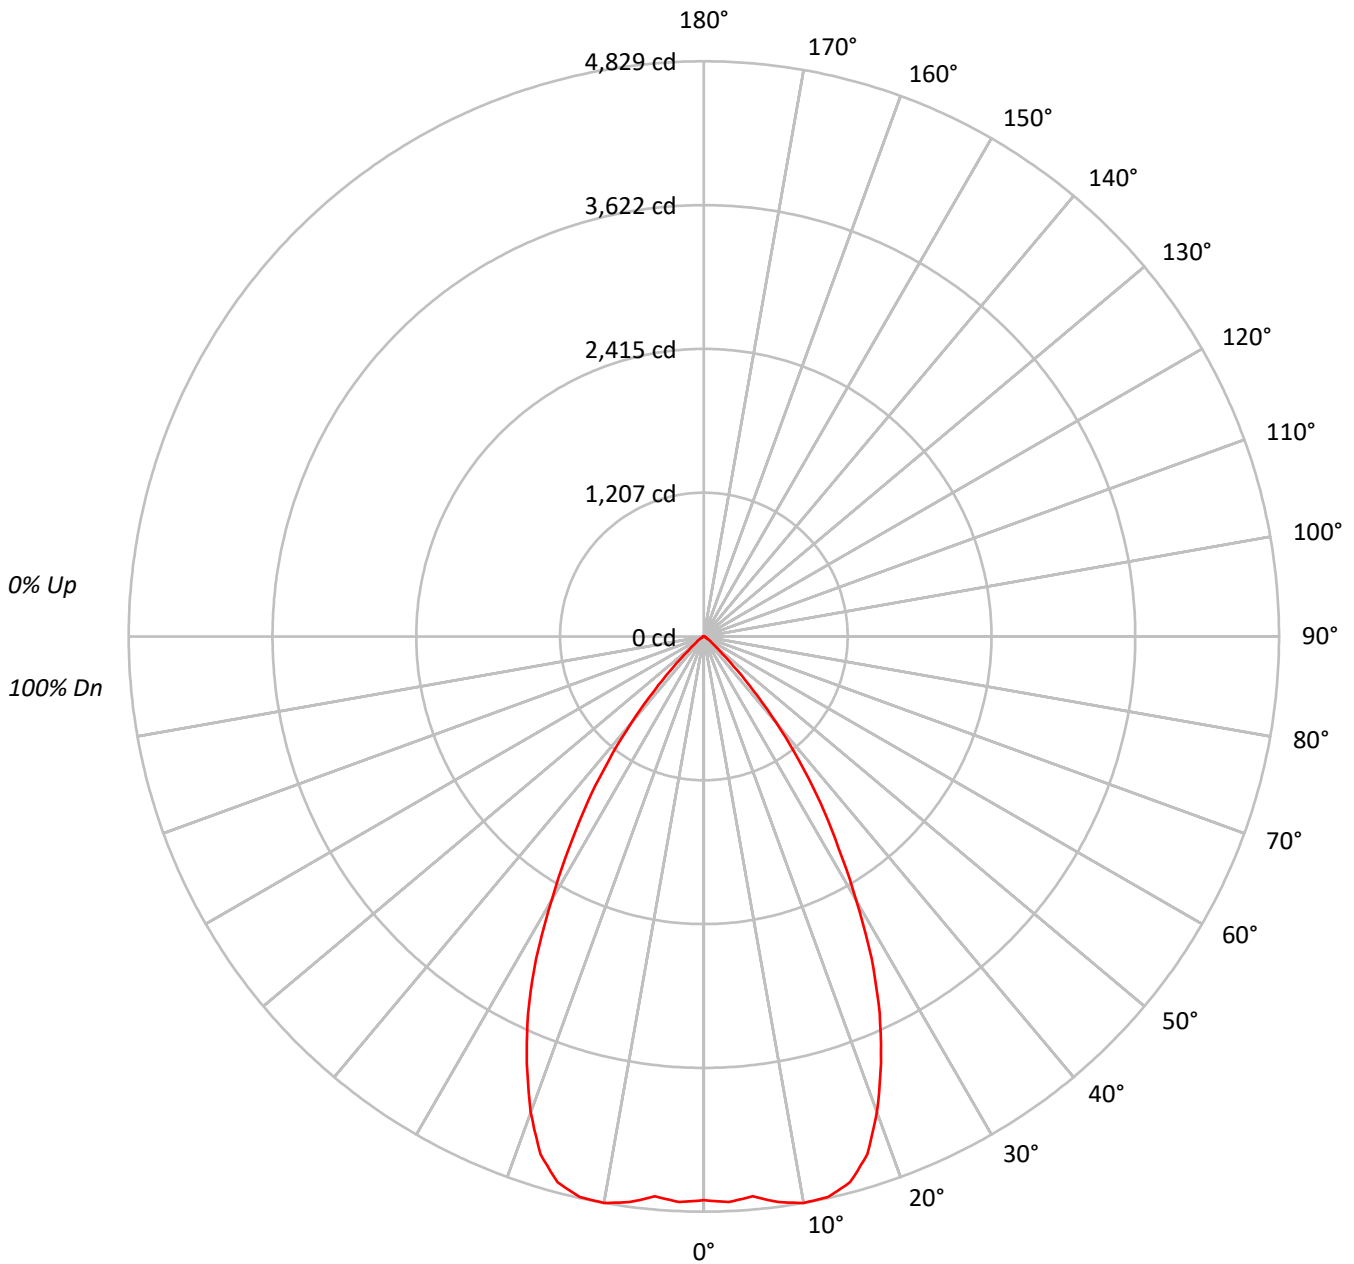



TEST NUMBER: P753568

CATALOG NUMBER: LD4D75BD010-EU4DR6570959030-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	517131
5°	517549
10°	535771
15°	536663
20°	494090
25°	420993
30°	322285
35°	227684
40°	134400
45°	54560
50°	19786
55°	11010
60°	6315
65°	3490
70°	3642
75°	2828
80°	2957
85°	2507

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 54560 cd/sqm



TEST NUMBER: P753568

CATALOG NUMBER: LD4D75BD010-EU4DR6570959030-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	455.7	9.5
10°-20°	1314.6	27.3
20°-30°	1577.3	32.8
30°-40°	1060.0	22.1
40°-50°	317.3	6.6
50°-60°	56.0	1.2
60°-70°	15.9	0.3
70°-80°	7.8	0.2
80°-90°	2.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3347.7	69.6
0°-40°	4407.7	91.7
0°-60°	4781.0	99.5
0°-90°	4807.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4807.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4733	
5°	4719	456
15°	4744	1315
25°	3492	1577
35°	1707	1060
45°	353	317
55°	58	56
65°	14	16
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P753568

CATALOG NUMBER: LD4D75BD010-EU4DR6570959030-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	4733.0
2.5°	4753.1
5°	4718.8
7.5°	4790.1
10°	4829.1
12.5°	4819.7
15°	4744.4
17.5°	4560.1
20°	4249.4
22.5°	3883.5
25°	3492.1
27.5°	3050.2
30°	2554.5
32.5°	2105.2
35°	1707.0
37.5°	1313.6
40°	942.3
42.5°	615.4
45°	353.1
47.5°	187.0
50°	116.4
52.5°	80.7
55°	57.8
57.5°	41.7
60°	28.9
62.5°	18.8
65°	13.5
67.5°	12.1
70°	11.4
72.5°	8.7
75°	6.7
77.5°	6.1
80°	4.7
82.5°	3.4
85°	2.0
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)