

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753584

Luminaire Tested: LD4D75BD010-EU4DR6570959040-4LBCSSQMMS

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P753584
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR6570959040-4LBCSSQMMMS
Description: 4 INCH SQAURE SHALLOW CAST MATTE METALLIC SILVER TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6673.0 lumens
Efficiency: N/A
Efficacy: 92.2 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P753584

CATALOG NUMBER: LD4D75BD010-EU4DR6570959040-4LBCSSQMMS

Luminous Intensity Polar Plot

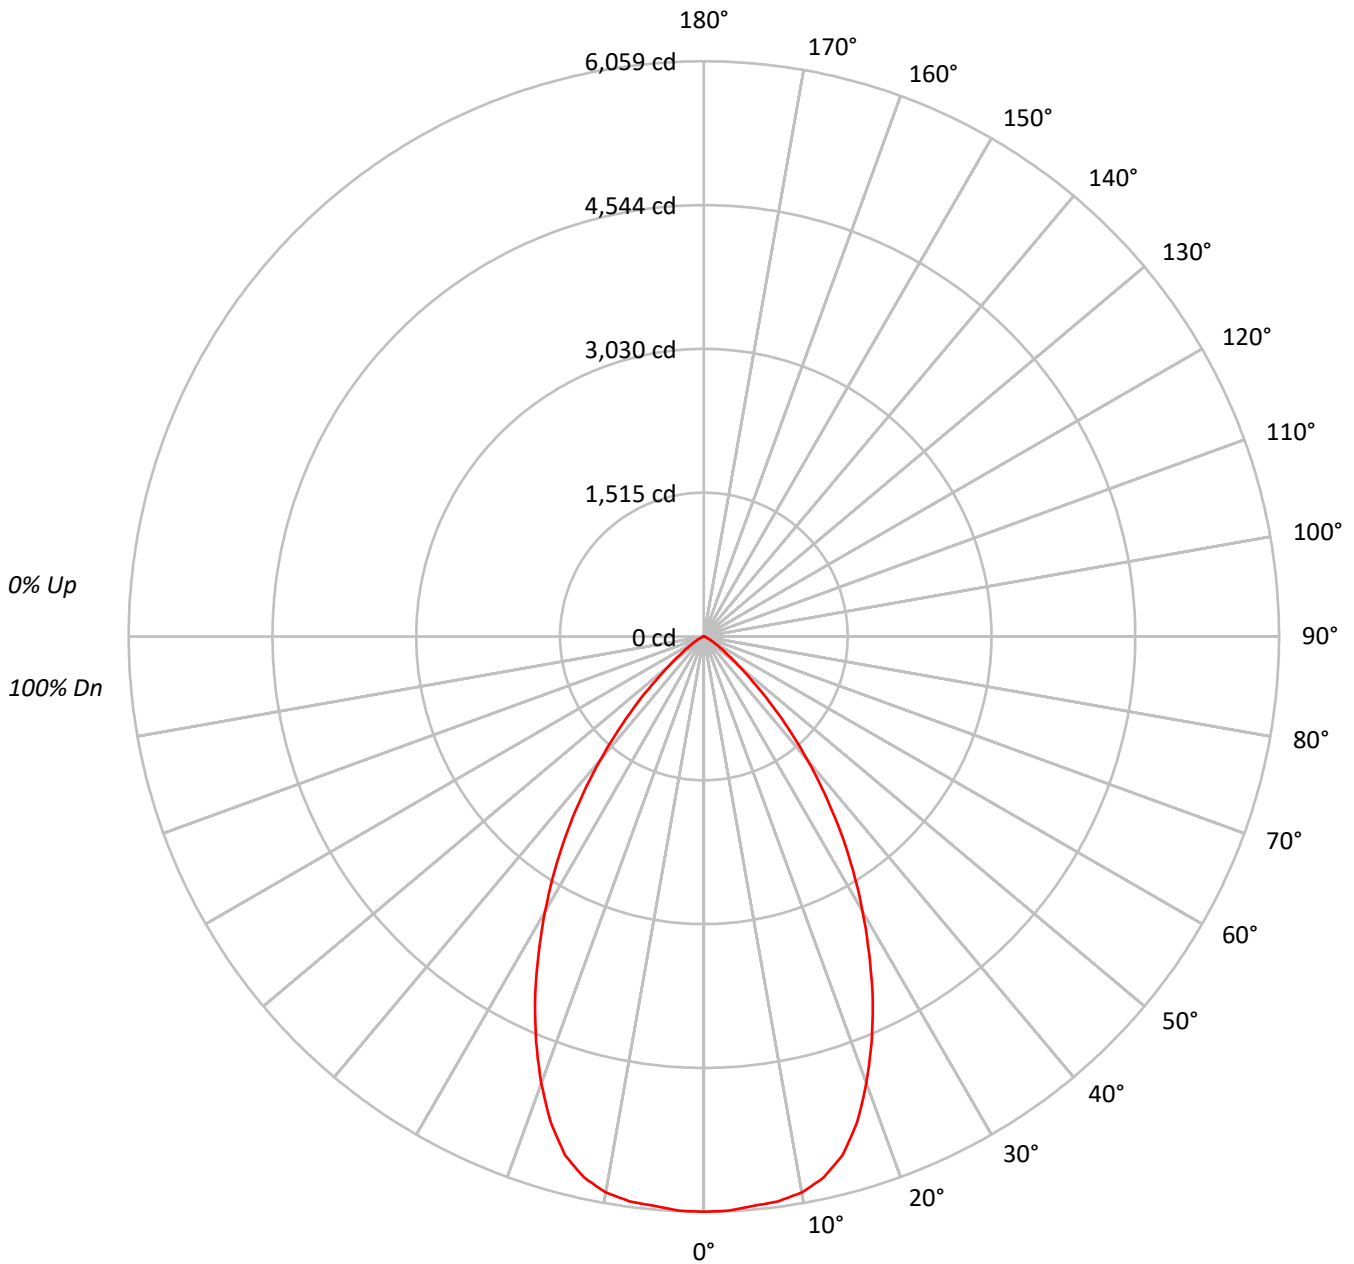



TEST NUMBER: P753584

CATALOG NUMBER: LD4D75BD010-EU4DR6570959040-4LBCSSQMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	353869
5°	352975
10°	352674
15°	341798
20°	311164
25°	271164
30°	225529
35°	178701
40°	128977
45°	81481
50°	42468
55°	22574
60°	11856
65°	6523
70°	2732
75°	3024
80°	2085
85°	1809

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 81481 cd/sqm



TEST NUMBER: P753584

CATALOG NUMBER: LD4D75BD010-EU4DR6570959040-4LBCSSQMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	573.0	8.6
10°-20°	1569.0	23.5
20°-30°	1917.9	28.7
30°-40°	1556.1	23.3
40°-50°	775.4	11.6
50°-60°	216.3	3.2
60°-70°	49.1	0.7
70°-80°	12.8	0.2
80°-90°	3.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4059.9	60.8
0°-40°	5616.1	84.2
0°-60°	6607.8	99.0
0°-90°	6673.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6673.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6059	
5°	6021	573
15°	5653	1569
25°	4208	1918
35°	2506	1556
45°	986	775
55°	222	216
65°	47	49
75°	13	13
85°	3	3
90°	0	



TEST NUMBER: P753584

CATALOG NUMBER: LD4D75BD010-EU4DR6570959040-4LBCSSQMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	6059.0
2.5°	6054.5
5°	6020.7
7.5°	6001.1
10°	5946.8
12.5°	5836.4
15°	5652.9
17.5°	5366.2
20°	5006.5
22.5°	4618.3
25°	4207.9
27.5°	3768.9
30°	3344.2
32.5°	2924.9
35°	2506.4
37.5°	2088.8
40°	1691.7
42.5°	1319.5
45°	986.5
47.5°	687.4
50°	467.4
52.5°	322.3
55°	221.7
57.5°	149.6
60°	101.5
62.5°	70.3
65°	47.2
67.5°	24.0
70°	16.0
72.5°	15.1
75°	13.4
77.5°	8.9
80°	6.2
82.5°	4.5
85°	2.7
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)