

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753595

Luminaire Tested: LD4D75BD010-EU4DR6570959040-4LBSQW1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P753595
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR6570959040-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5978.0 lumens
Efficiency: N/A
Efficacy: 82.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P753595
CATALOG NUMBER: LD4D75BD010-EU4DR6570959040-4LBSQW1MW

Luminous Intensity Polar Plot

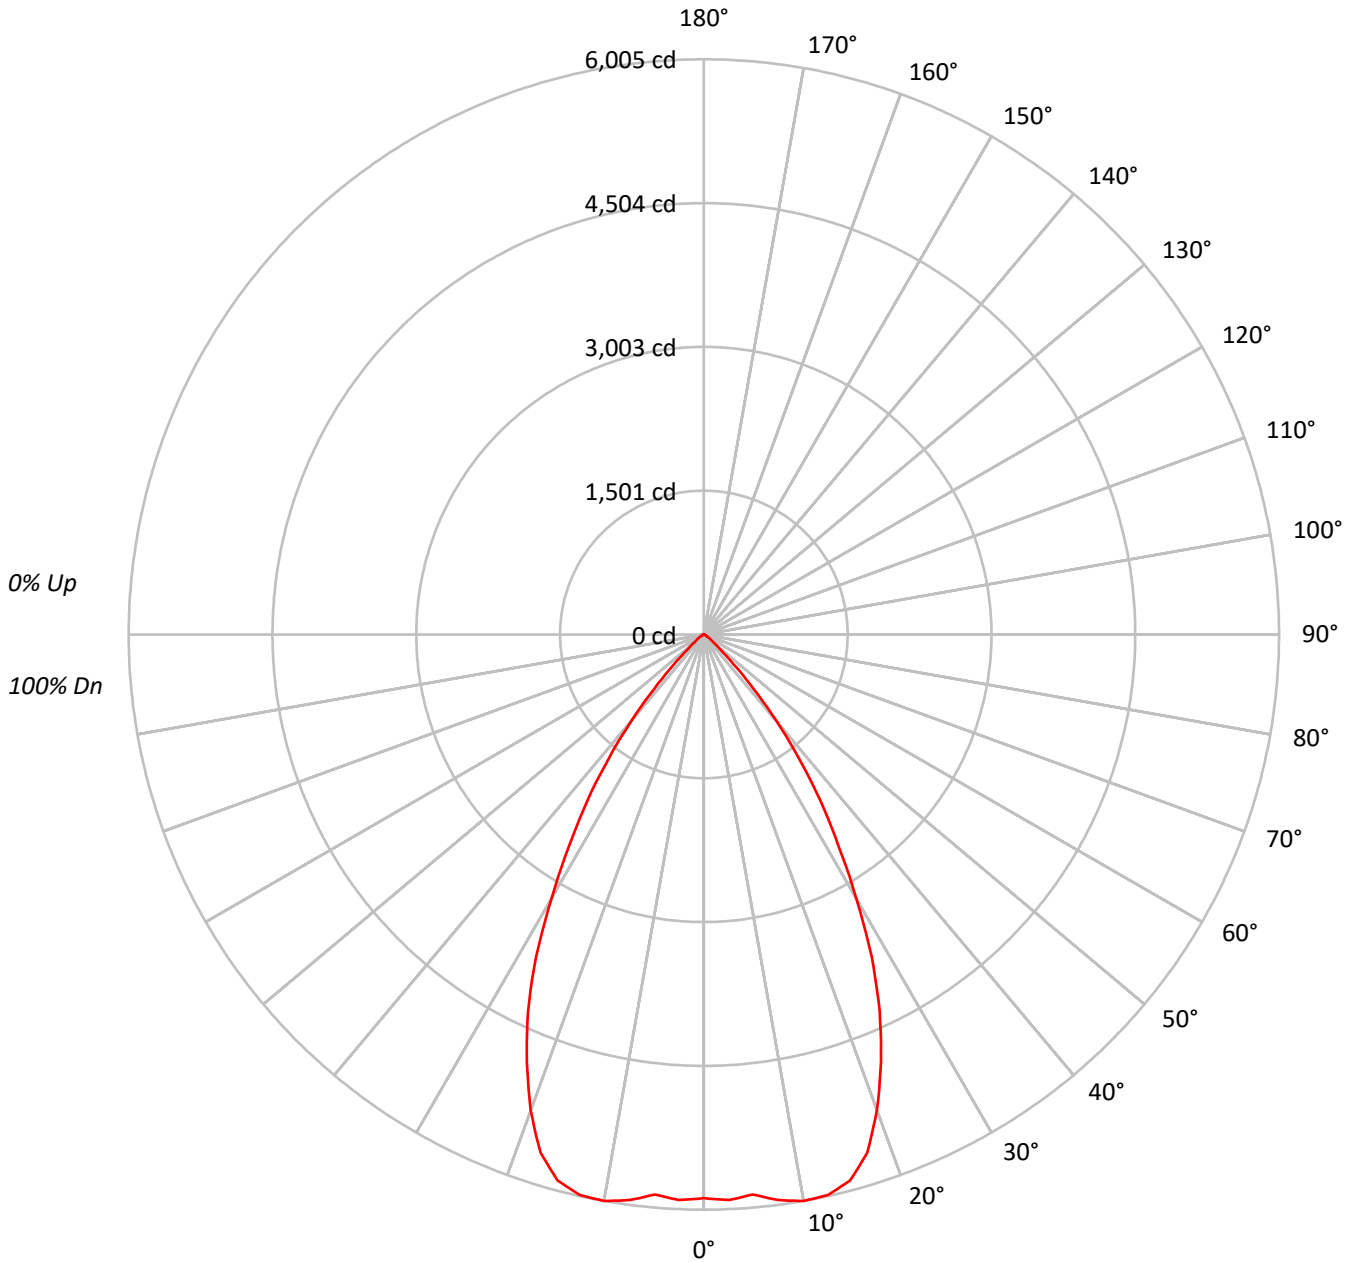



TEST NUMBER: P753595

CATALOG NUMBER: LD4D75BD010-EU4DR6570959040-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																												
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																												
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																												
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																												
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																												
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																												
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																												
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																												
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																												
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																												

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	643076
5°	643613
10°	666266
15°	667368
20°	614432
25°	523526
30°	400771
35°	283145
40°	167134
45°	67849
50°	24596
55°	13696
60°	7867
65°	4318
70°	4536
75°	3546
80°	3712
85°	3134

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 67849 cd/sqm



TEST NUMBER: P753595

CATALOG NUMBER: LD4D75BD010-EU4DR6570959040-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	566.7	9.5
10°-20°	1634.8	27.3
20°-30°	1961.5	32.8
30°-40°	1318.2	22.1
40°-50°	394.6	6.6
50°-60°	69.7	1.2
60°-70°	19.8	0.3
70°-80°	9.7	0.2
80°-90°	3.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4163.0	69.6
0°-40°	5481.2	91.7
0°-60°	5945.4	99.5
0°-90°	5978.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5978.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5886	
5°	5868	567
15°	5900	1635
25°	4343	1961
35°	2123	1318
45°	439	395
55°	72	70
65°	17	20
75°	8	10
85°	2	3
90°	0	



TEST NUMBER: P753595

CATALOG NUMBER: LD4D75BD010-EU4DR6570959040-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5885.7
2.5°	5910.8
5°	5868.2
7.5°	5956.8
10°	6005.3
12.5°	5993.6
15°	5899.9
17.5°	5670.8
20°	5284.4
22.5°	4829.4
25°	4342.6
27.5°	3793.1
30°	3176.6
32.5°	2617.9
35°	2122.8
37.5°	1633.5
40°	1171.8
42.5°	765.3
45°	439.1
47.5°	232.5
50°	144.7
52.5°	100.4
55°	71.9
57.5°	51.9
60°	36.0
62.5°	23.4
65°	16.7
67.5°	15.1
70°	14.2
72.5°	10.9
75°	8.4
77.5°	7.5
80°	5.9
82.5°	4.2
85°	2.5
87.5°	1.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)