

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753130

Luminaire Tested: LD4D75BD010-EU4DR3570959050-4LBCSSQMW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P753130  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D75BD010-EU4DR3570959050-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7138.8 lumens  
Efficiency: N/A  
Efficacy: 98.6 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 72.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



TEST NUMBER: P753130  
CATALOG NUMBER: LD4D75BD010-EU4DR3570959050-4LBCSSQMW

### Luminous Intensity Polar Plot

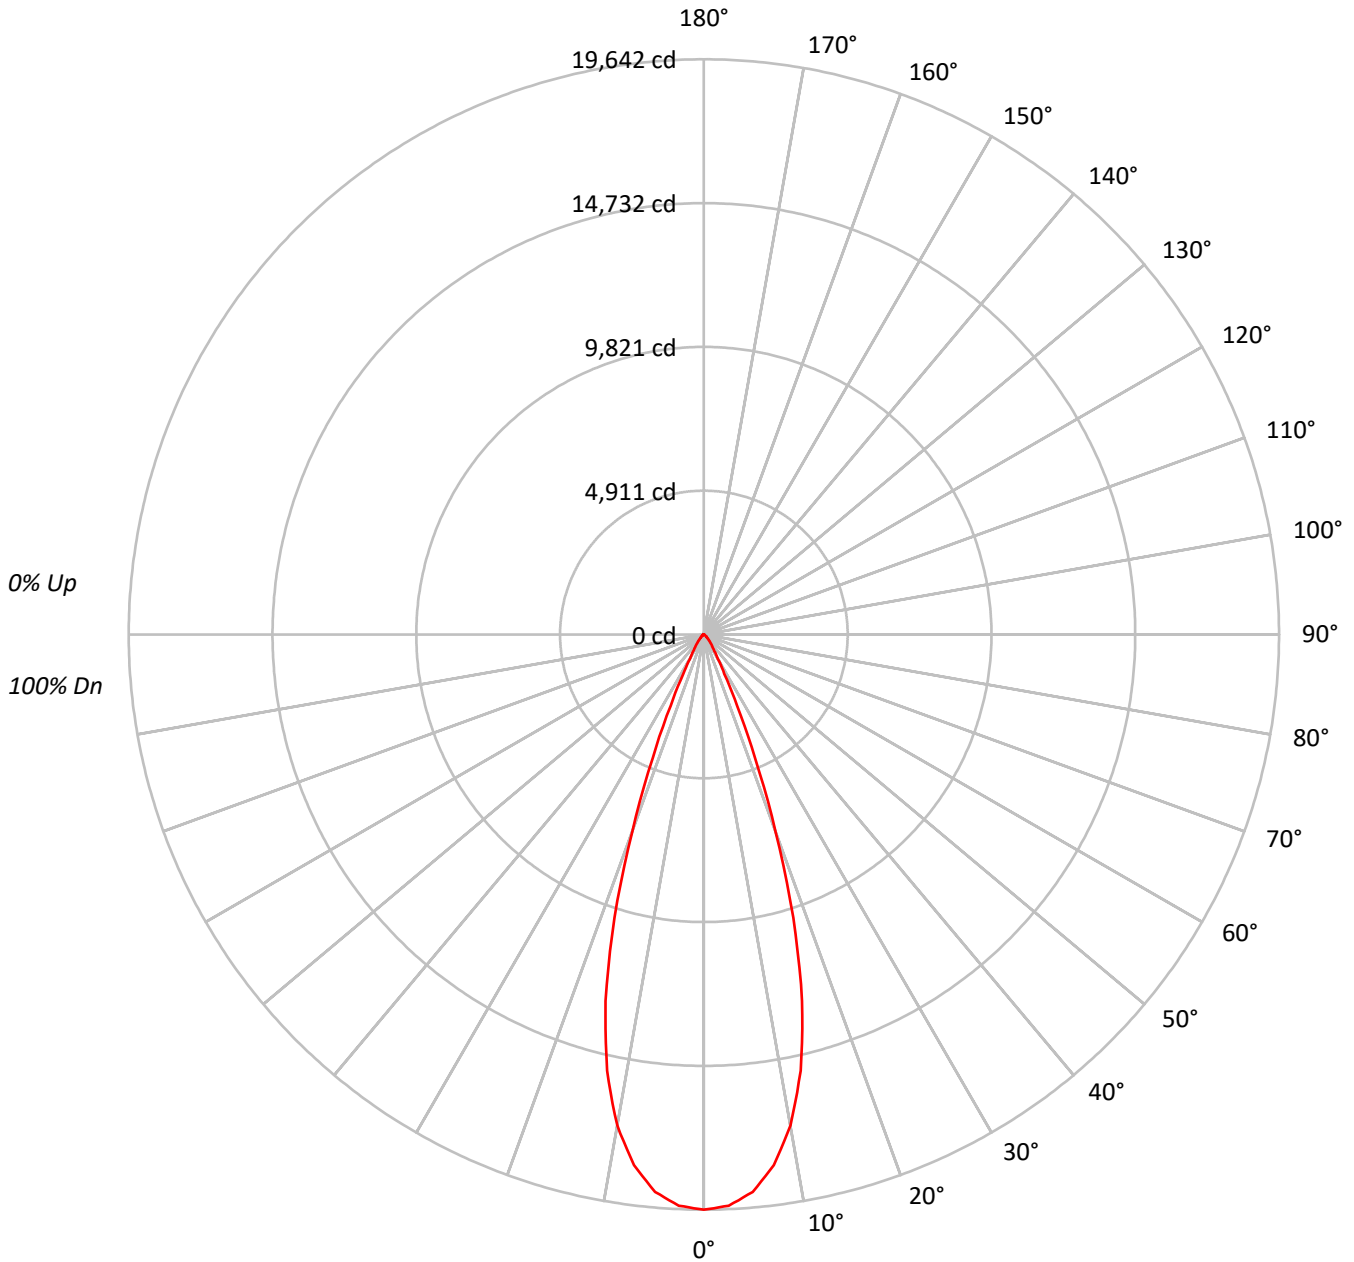



TEST NUMBER: P753130

CATALOG NUMBER: LD4D75BD010-EU4DR3570959050-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96			96
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92			92
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88			88
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84			84
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81			81
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78			78
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75			75
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72			72
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70			70
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68			68

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2146143
5°	2095718
10°	1888794
15°	1466005
20°	831502
25°	323488
30°	120688
35°	66158
40°	43231
45°	26314
50°	16743
55°	11829
60°	8653
65°	4705
70°	351
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 26314 cd/sqm



TEST NUMBER: P753130

CATALOG NUMBER: LD4D75BD010-EU4DR3570959050-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1757.4	24.6
10°-20°	3431.1	48.1
20°-30°	1399.4	19.6
30°-40°	334.9	4.7
40°-50°	139.5	2.0
50°-60°	57.7	0.8
60°-70°	18.1	0.3
70°-80°	0.4	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6587.8	92.3
0°-40°	6922.7	97.0
0°-60°	7120.0	99.7
0°-90°	7138.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7138.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	19642	
5°	19108	###
15°	12960	3431
25°	2683	1399
35°	496	335
45°	170	140
55°	62	58
65°	18	18
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753130

CATALOG NUMBER: LD4D75BD010-EU4DR3570959050-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	19642.4
2.5°	19524.6
5°	19107.9
7.5°	18276.6
10°	17024.4
12.5°	15261.2
15°	12960.3
17.5°	10146.3
20°	7151.3
22.5°	4560.1
25°	2683.3
27.5°	1516.8
30°	956.6
32.5°	671.6
35°	496.0
37.5°	383.5
40°	303.1
42.5°	233.5
45°	170.3
47.5°	127.5
50°	98.5
52.5°	78.2
55°	62.1
57.5°	50.3
60°	39.6
62.5°	28.9
65°	18.2
67.5°	6.4
70°	1.1
72.5°	1.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.1
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)