

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P753520

Luminaire Tested: LD4D75BD010-EU4DR6070959050-4LBCSSQMW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P753520
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-60)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D75BD010-EU4DR6070959050-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7514.1 lumens
Efficiency: N/A
Efficacy: 103.8 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P753520

CATALOG NUMBER: LD4D75BD010-EU4DR6070959050-4LBCSSQMW

Luminous Intensity Polar Plot

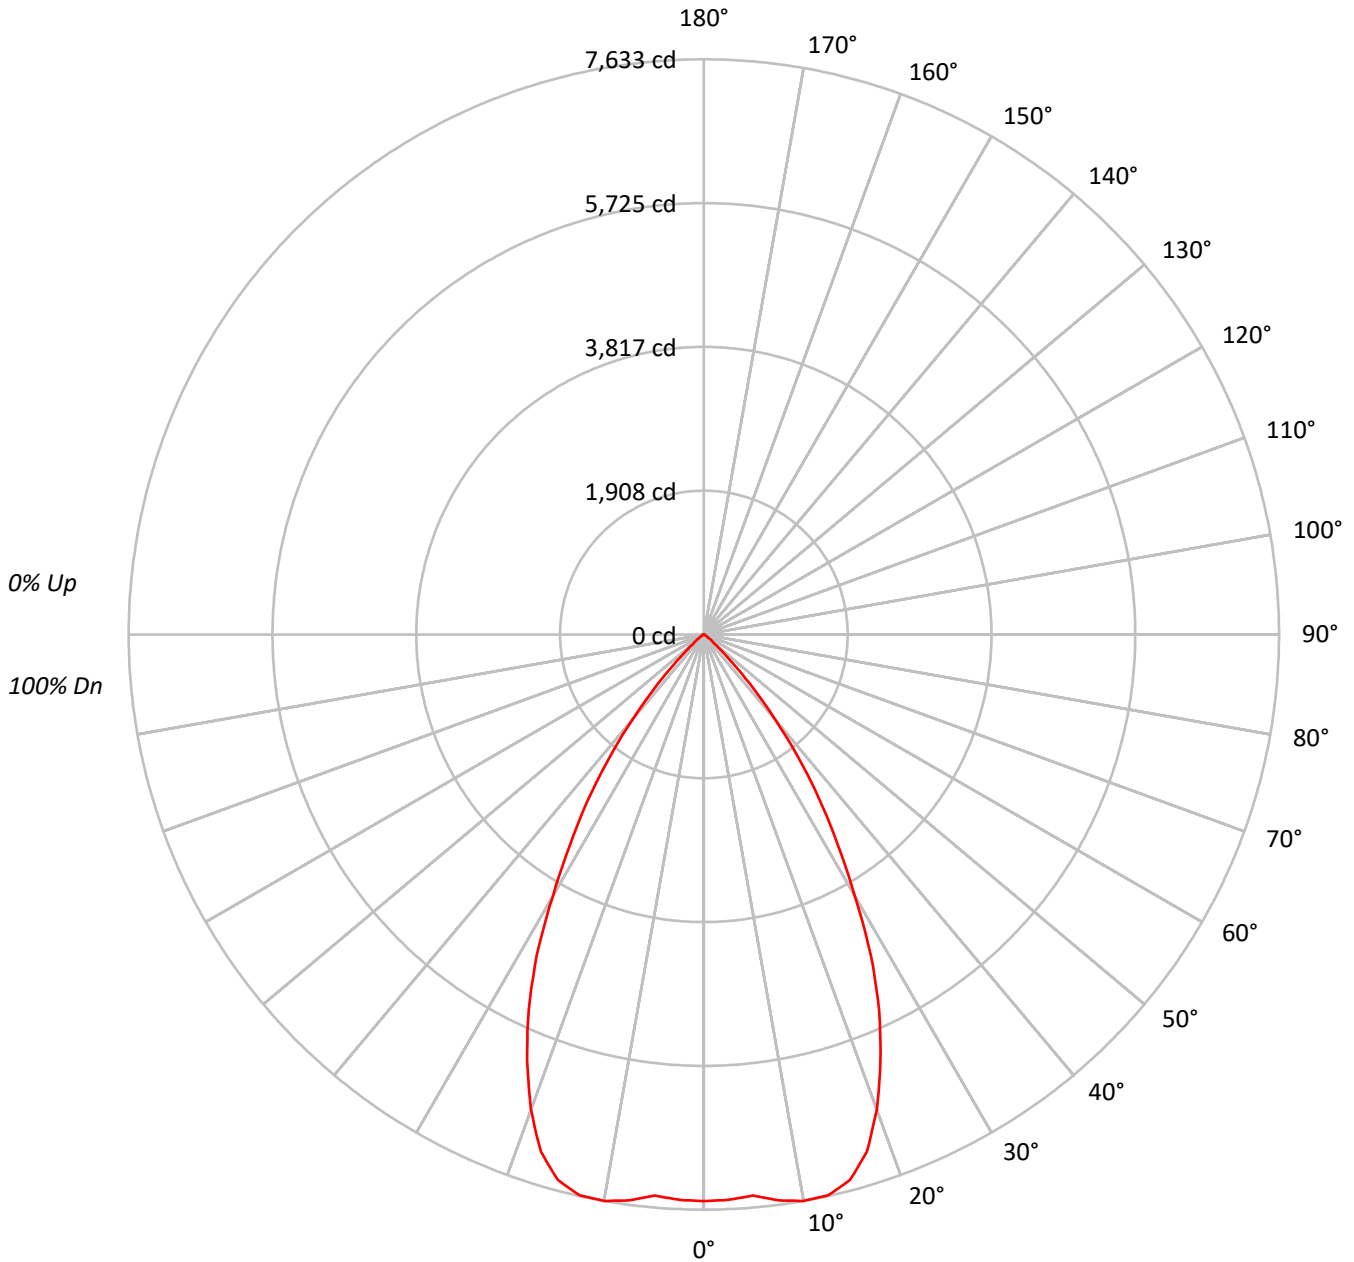



TEST NUMBER: P753520

CATALOG NUMBER: LD4D75BD010-EU4DR6070959050-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94					94			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87					87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81					81			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75					75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70					70			
6	87	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65					65			
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61					61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	61	58	57					57			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53					53			
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50					50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	821597
5°	819592
10°	846809
15°	847684
20°	779958
25°	663407
30°	505499
35°	357466
40°	209908
45°	84707
50°	28285
55°	13620
60°	5594
65°	827
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 84707 cd/sqm



TEST NUMBER: P753520

CATALOG NUMBER: LD4D75BD010-EU4DR6070959050-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	720.9	9.6
10°-20°	2076.1	27.6
20°-30°	2484.8	33.1
30°-40°	1661.9	22.1
40°-50°	492.8	6.6
50°-60°	70.9	0.9
60°-70°	6.8	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5281.8	70.3
0°-40°	6943.7	92.4
0°-60°	7507.4	99.9
0°-90°	7514.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7514.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7520	
5°	7473	721
15°	7494	2076
25°	5503	2485
35°	2680	1662
45°	548	493
55°	72	71
65°	3	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P753520

CATALOG NUMBER: LD4D75BD010-EU4DR6070959050-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

0°	
0°	7519.6
2.5°	7510.0
5°	7472.7
7.5°	7574.0
10°	7632.6
12.5°	7622.0
15°	7494.0
17.5°	7192.2
20°	6708.0
22.5°	6126.8
25°	5502.9
27.5°	4800.1
30°	4006.7
32.5°	3298.5
35°	2680.0
37.5°	2060.4
40°	1471.7
42.5°	970.5
45°	548.2
47.5°	280.5
50°	166.4
52.5°	107.7
55°	71.5
57.5°	45.9
60°	25.6
62.5°	10.7
65°	3.2
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)