

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741629

Luminaire Tested: LD4D08D010-EU4DR650210IC9024-4LBCSSQMB

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741629  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR650210IC9024-4LBCSSQMB  
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 573.9 lumens  
Efficiency: N/A  
Efficacy: 64.5 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741629

CATALOG NUMBER: LD4D08D010-EU4DR650210IC9024-4LBCSSQMB

### Luminous Intensity Polar Plot

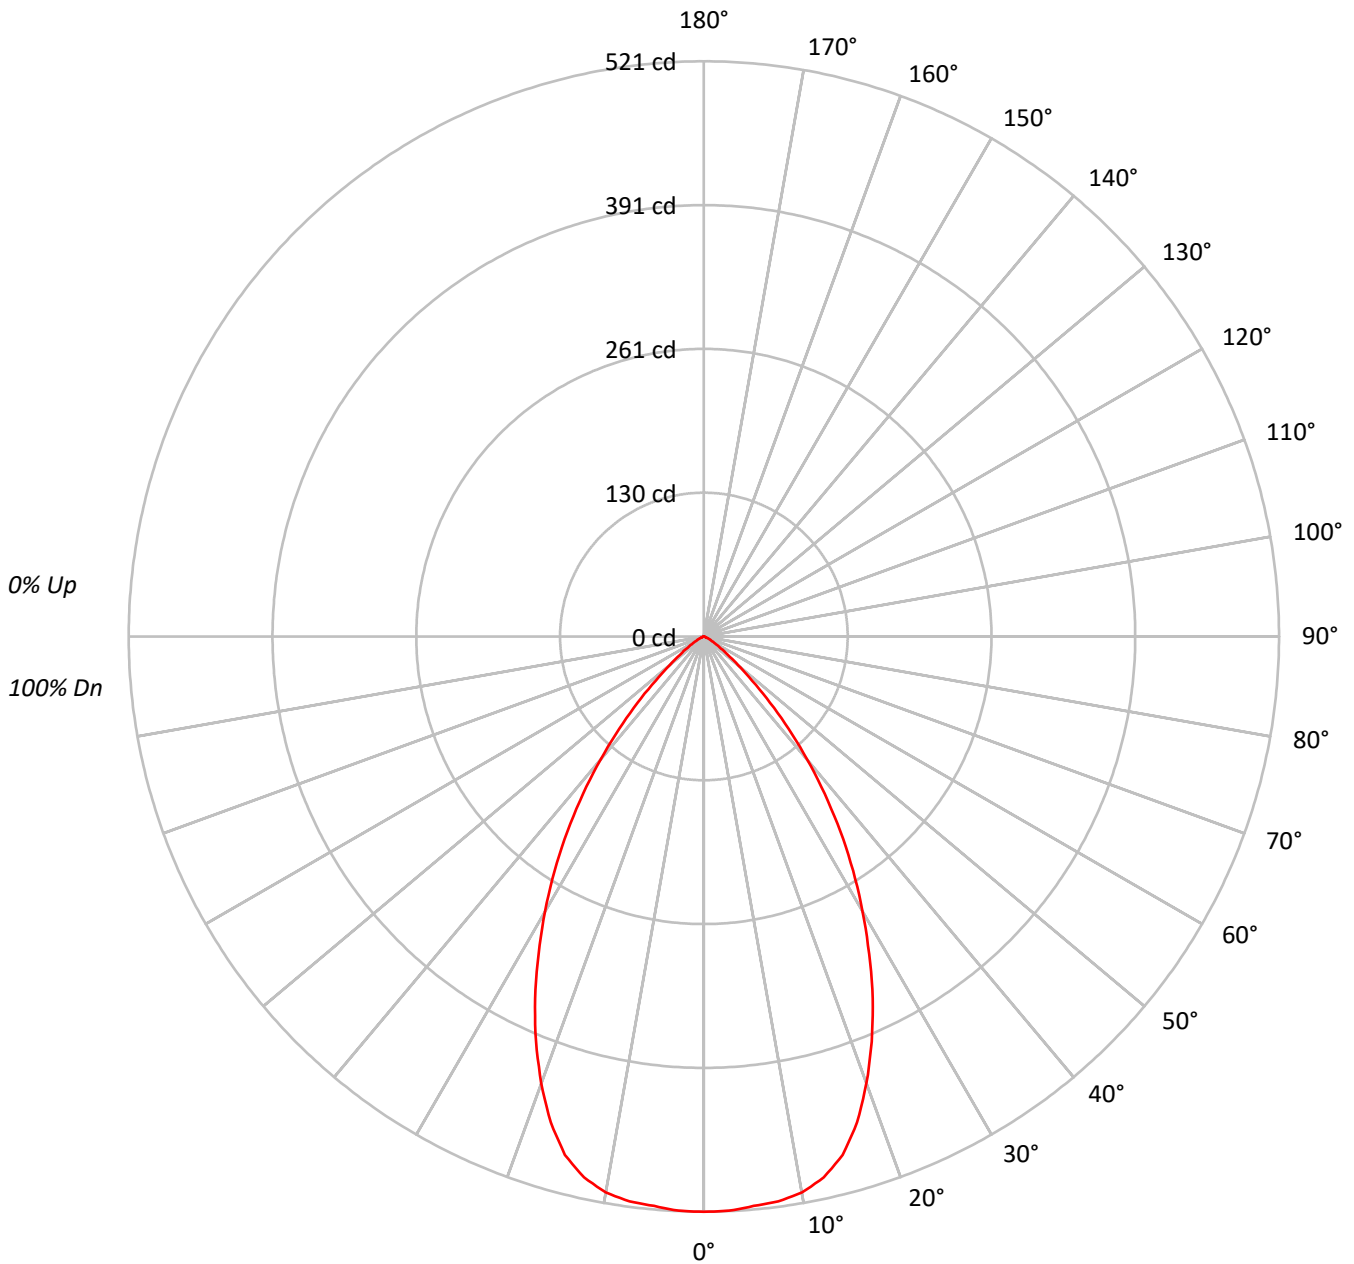



TEST NUMBER: P741629

CATALOG NUMBER: LD4D08D010-EU4DR650210IC9024-4LBCSSQMB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	30434
5°	30357
10°	30328
15°	29392
20°	26763
25°	23321
30°	19395
35°	15365
40°	11093
45°	7012
50°	3653
55°	1945
60°	1016
65°	567
70°	239
75°	248
80°	168
85°	134

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7012 cd/sqm



TEST NUMBER: P741629

CATALOG NUMBER: LD4D08D010-EU4DR650210IC9024-4LBCSSQMB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	49.3	8.6
10°-20°	134.9	23.5
20°-30°	164.9	28.7
30°-40°	133.8	23.3
40°-50°	66.7	11.6
50°-60°	18.6	3.2
60°-70°	4.3	0.7
70°-80°	1.1	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	349.2	60.8
0°-40°	483.0	84.2
0°-60°	568.3	99.0
0°-90°	573.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	573.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	521	
5°	518	49
15°	486	135
25°	362	165
35°	216	134
45°	85	67
55°	19	19
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P741629

CATALOG NUMBER: LD4D08D010-EU4DR650210IC9024-4LBCSSQMB

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	521.1
2.5°	520.7
5°	517.8
7.5°	516.1
10°	511.4
12.5°	501.9
15°	486.1
17.5°	461.5
20°	430.6
22.5°	397.2
25°	361.9
27.5°	324.1
30°	287.6
32.5°	251.5
35°	215.5
37.5°	179.6
40°	145.5
42.5°	113.5
45°	84.9
47.5°	59.1
50°	40.2
52.5°	27.7
55°	19.1
57.5°	12.9
60°	8.7
62.5°	6.1
65°	4.1
67.5°	2.1
70°	1.4
72.5°	1.3
75°	1.1
77.5°	0.7
80°	0.5
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)