

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740899

Luminaire Tested: LD4D08D010-EU4DR150210IC9035-4LBSQW1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740899  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR150210IC9035-4LBSQW1B  
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 688.9 lumens  
Efficiency: N/A  
Efficacy: 77.4 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740899  
CATALOG NUMBER: LD4D08D010-EU4DR150210IC9035-4LBSQW1B

### Luminous Intensity Polar Plot

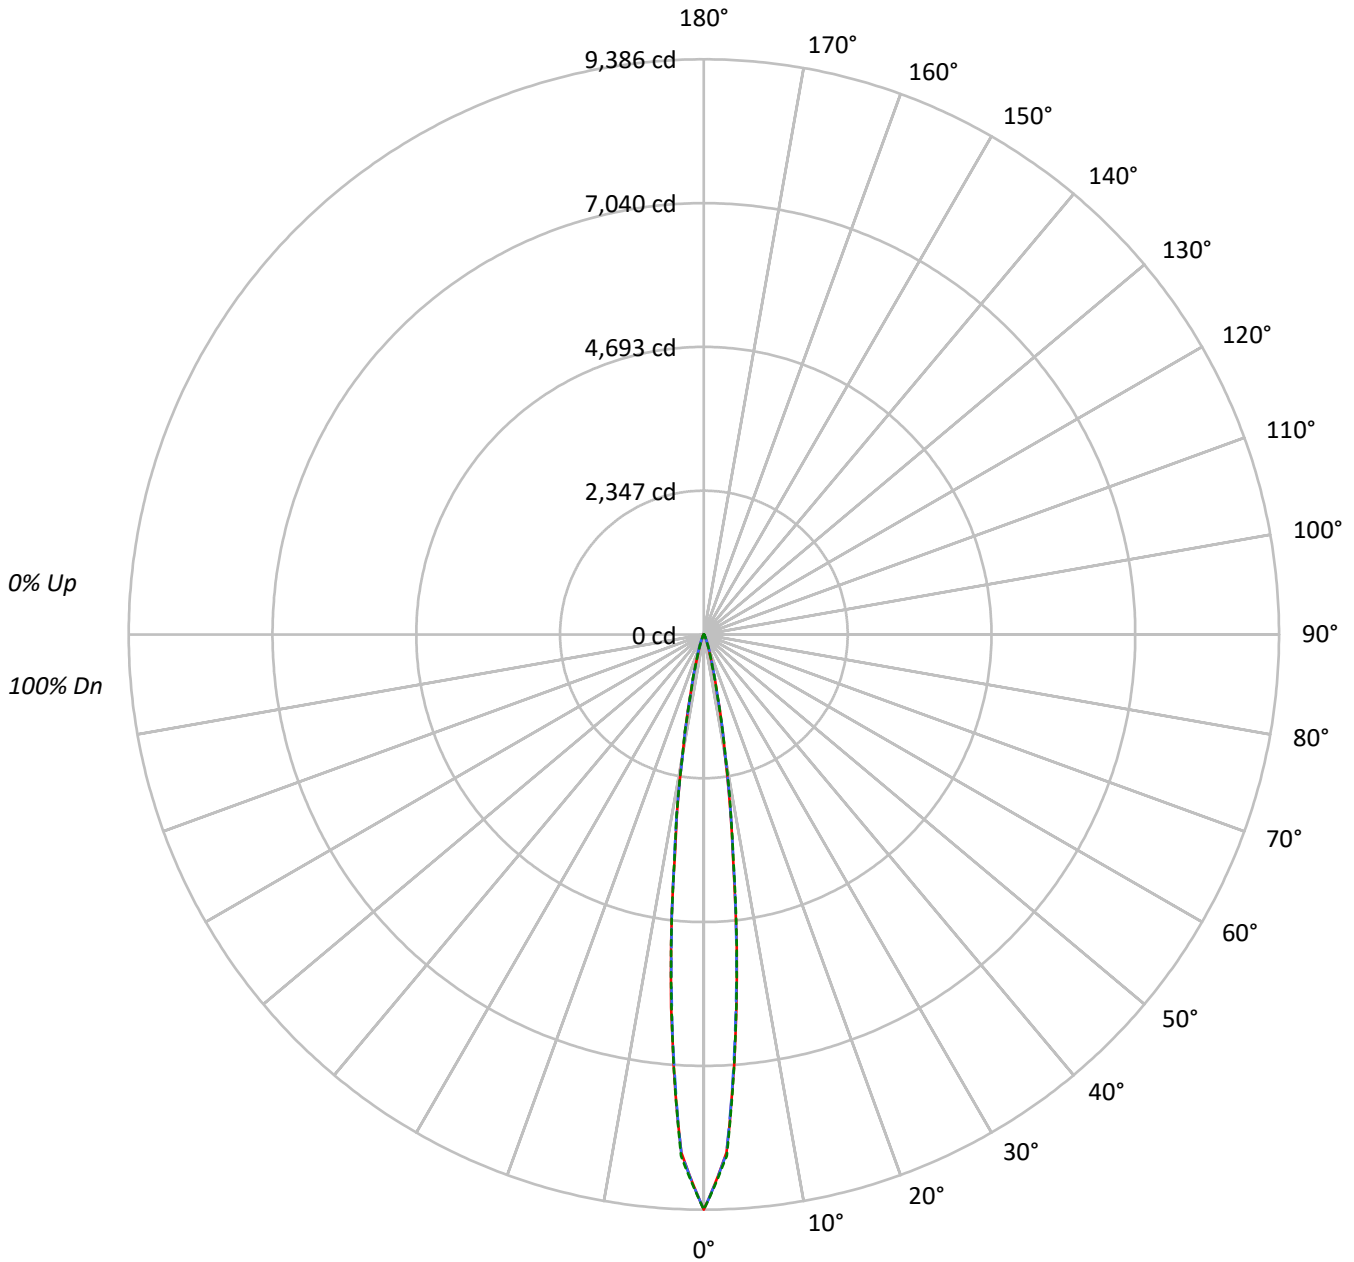



TEST NUMBER: P740899

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9035-4LBSQW1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	93	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1056078	1056078	1056078
5°	620597	612568	617416
10°	185225	186522	189377
15°	46069	46972	45522
20°	13787	15964	14074
25°	4861	6193	4923
30°	1782	2351	1812
35°	893	1009	864
40°	561	618	561
45°	420	448	420
50°	334	334	334
55°	278	278	278
60°	225	225	225
65°	171	171	171
70°	146	146	146
75°	91	91	121
80°	63	63	63
85°	33	33	33

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 448 cd/sqm



TEST NUMBER: P740899

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9035-4LBSQW1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	446.8	64.8
10°-20°	183.8	26.7
20°-30°	36.5	5.3
30°-40°	9.1	1.3
40°-50°	4.8	0.7
50°-60°	3.6	0.5
60°-70°	2.5	0.4
70°-80°	1.4	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	667.1	96.8
0°-40°	676.2	98.1
0°-60°	684.5	99.4
0°-90°	688.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	688.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	9386	9386	9386	9386	9386	
5°	6106	6044	6028	6069	6075	446
15°	530	540	541	531	524	182
25°	62	71	80	70	63	33
35°	12	13	14	13	12	8
45°	6	6	6	6	6	5
55°	4	4	4	4	4	4
65°	2	2	2	2	2	3
75°	1	1	1	1	2	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740899

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9035-4LBSQW1B

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	9385.7	9385.7	9385.7	9385.7	9385.7
2.5°	8466.3	8473.4	8476.2	8484.6	8515.6
5°	6106.5	6043.8	6027.5	6069.2	6075.2
7.5°	3617.3	3630.0	3676.5	3686.8	3649.5
10°	1985.1	2001.3	1999.0	2013.3	2029.6
12.5°	1015.2	1002.5	998.5	1014.8	992.1
15°	530.4	540.4	540.8	531.2	524.1
17.5°	285.3	296.8	315.9	300.4	276.5
20°	168.5	178.8	195.1	182.4	172.0
22.5°	104.1	112.4	124.0	114.0	105.7
25°	62.4	70.7	79.5	70.3	63.2
27.5°	37.0	44.1	49.7	43.7	36.6
30°	23.8	27.8	31.4	27.4	24.2
32.5°	16.7	18.3	19.9	18.3	16.7
35°	12.3	13.1	13.9	13.1	11.9
37.5°	9.5	10.3	10.7	9.9	9.1
40°	7.9	8.3	8.7	8.3	7.9
42.5°	6.8	7.2	7.2	7.2	6.8
45°	6.0	6.0	6.4	6.0	6.0
47.5°	5.2	5.2	5.6	5.2	5.2
50°	4.8	4.8	4.8	4.8	4.8
52.5°	4.4	4.4	4.4	4.4	4.4
55°	4.0	4.0	4.0	4.0	4.0
57.5°	3.6	3.6	3.6	3.6	3.6
60°	3.2	3.2	3.2	3.2	3.2
62.5°	2.8	2.8	2.8	2.8	2.8
65°	2.4	2.4	2.4	2.4	2.4
67.5°	2.4	2.4	2.4	2.4	2.4
70°	2.0	2.0	2.0	2.0	2.0
72.5°	1.6	1.6	1.6	1.6	1.6
75°	1.2	1.2	1.2	1.2	1.6
77.5°	1.2	1.2	1.2	1.2	1.2
80°	0.8	0.8	0.8	0.8	0.8
82.5°	0.8	0.8	0.8	0.8	0.8
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)