

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740903

Luminaire Tested: LD4D08D010-EU4DR150210IC9040-4LBCSSQMW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P740903  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D08D010-EU4DR150210IC9040-4LBCSSQMW  
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 771.4 lumens  
Efficiency: N/A  
Efficacy: 86.7 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P740903

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9040-4LBCSSQMW

### Luminous Intensity Polar Plot

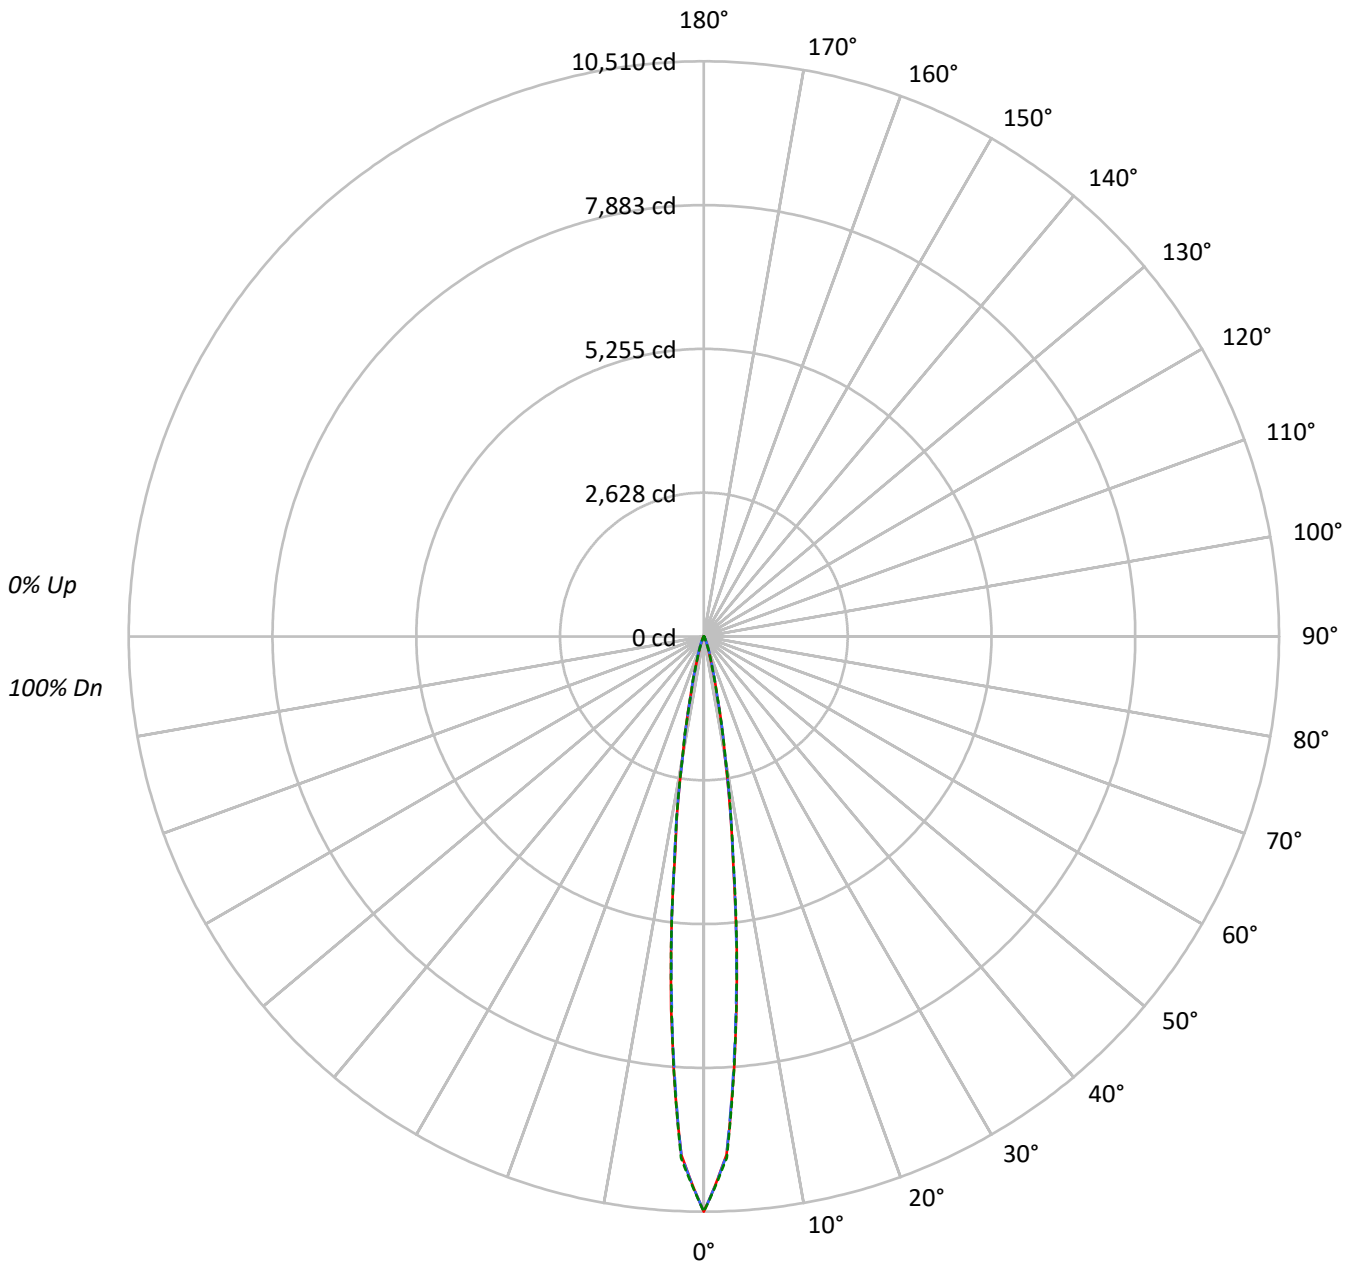



TEST NUMBER: P740903

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9040-4LBCSSQMW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1182630	1182630	1182630
5°	694969	685965	691392
10°	207413	208869	212069
15°	51593	52601	50976
20°	15440	17878	15767
25°	5445	6933	5508
30°	1999	2636	2029
35°	1002	1133	966
40°	632	696	632
45°	469	497	469
50°	369	369	369
55°	306	306	306
60°	253	253	253
65°	193	193	193
70°	161	161	161
75°	98	98	136
80°	71	71	71
85°	33	33	33

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 497 cd/sqm



TEST NUMBER: P740903

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9040-4LBCSSQMW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	500.3	64.9
10°-20°	205.8	26.7
20°-30°	40.9	5.3
30°-40°	10.2	1.3
40°-50°	5.4	0.7
50°-60°	4.0	0.5
60°-70°	2.8	0.4
70°-80°	1.6	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	747.0	96.8
0°-40°	757.2	98.2
0°-60°	766.5	99.4
0°-90°	771.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	771.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	10510	10510	10510	10510	10510	
5°	6838	6768	6750	6796	6803	499
15°	594	605	606	595	587	204
25°	70	79	89	79	71	37
35°	14	15	16	15	13	9
45°	7	7	7	7	7	5
55°	4	4	4	4	4	4
65°	3	3	3	3	3	3
75°	1	1	1	1	2	2
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740903

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9040-4LBCSSQMW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	10510.4	10510.4	10510.4	10510.4	10510.4
2.5°	9480.8	9488.8	9491.9	9501.2	9535.9
5°	6838.3	6768.0	6749.7	6796.4	6803.1
7.5°	4050.7	4065.0	4117.0	4128.6	4086.8
10°	2222.9	2241.2	2238.5	2254.5	2272.8
12.5°	1136.8	1122.6	1118.1	1136.4	1111.0
15°	594.0	605.1	605.6	594.9	586.9
17.5°	319.5	332.4	353.7	336.4	309.7
20°	188.7	200.2	218.5	204.2	192.7
22.5°	116.6	125.9	138.8	127.7	118.4
25°	69.9	79.2	89.0	78.8	70.7
27.5°	41.4	49.4	55.6	48.9	40.9
30°	26.7	31.1	35.2	30.7	27.1
32.5°	18.7	20.5	22.2	20.5	18.7
35°	13.8	14.7	15.6	14.7	13.3
37.5°	10.7	11.6	12.0	11.1	10.2
40°	8.9	9.3	9.8	9.3	8.9
42.5°	7.6	8.0	8.0	8.0	7.6
45°	6.7	6.7	7.1	6.7	6.7
47.5°	5.8	5.8	6.2	5.8	5.8
50°	5.3	5.3	5.3	5.3	5.3
52.5°	4.9	4.9	4.9	4.9	4.9
55°	4.4	4.4	4.4	4.4	4.4
57.5°	4.0	4.0	4.0	4.0	4.0
60°	3.6	3.6	3.6	3.6	3.6
62.5°	3.1	3.1	3.1	3.1	3.1
65°	2.7	2.7	2.7	2.7	2.7
67.5°	2.7	2.7	2.7	2.7	2.7
70°	2.2	2.2	2.2	2.2	2.2
72.5°	1.8	1.8	1.8	1.8	1.8
75°	1.3	1.3	1.3	1.3	1.8
77.5°	1.3	1.3	1.3	1.3	1.3
80°	0.9	0.9	0.9	0.9	0.9
82.5°	0.9	0.9	0.9	0.9	0.9
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)