

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P740916

Luminaire Tested: LD4D08D010-EU4DR150210IC9050-4LBCSSQMW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P740916
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D08D010-EU4DR150210IC9050-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 762.3 lumens
Efficiency: N/A
Efficacy: 85.7 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P740916

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9050-4LBCSSQMW

Luminous Intensity Polar Plot

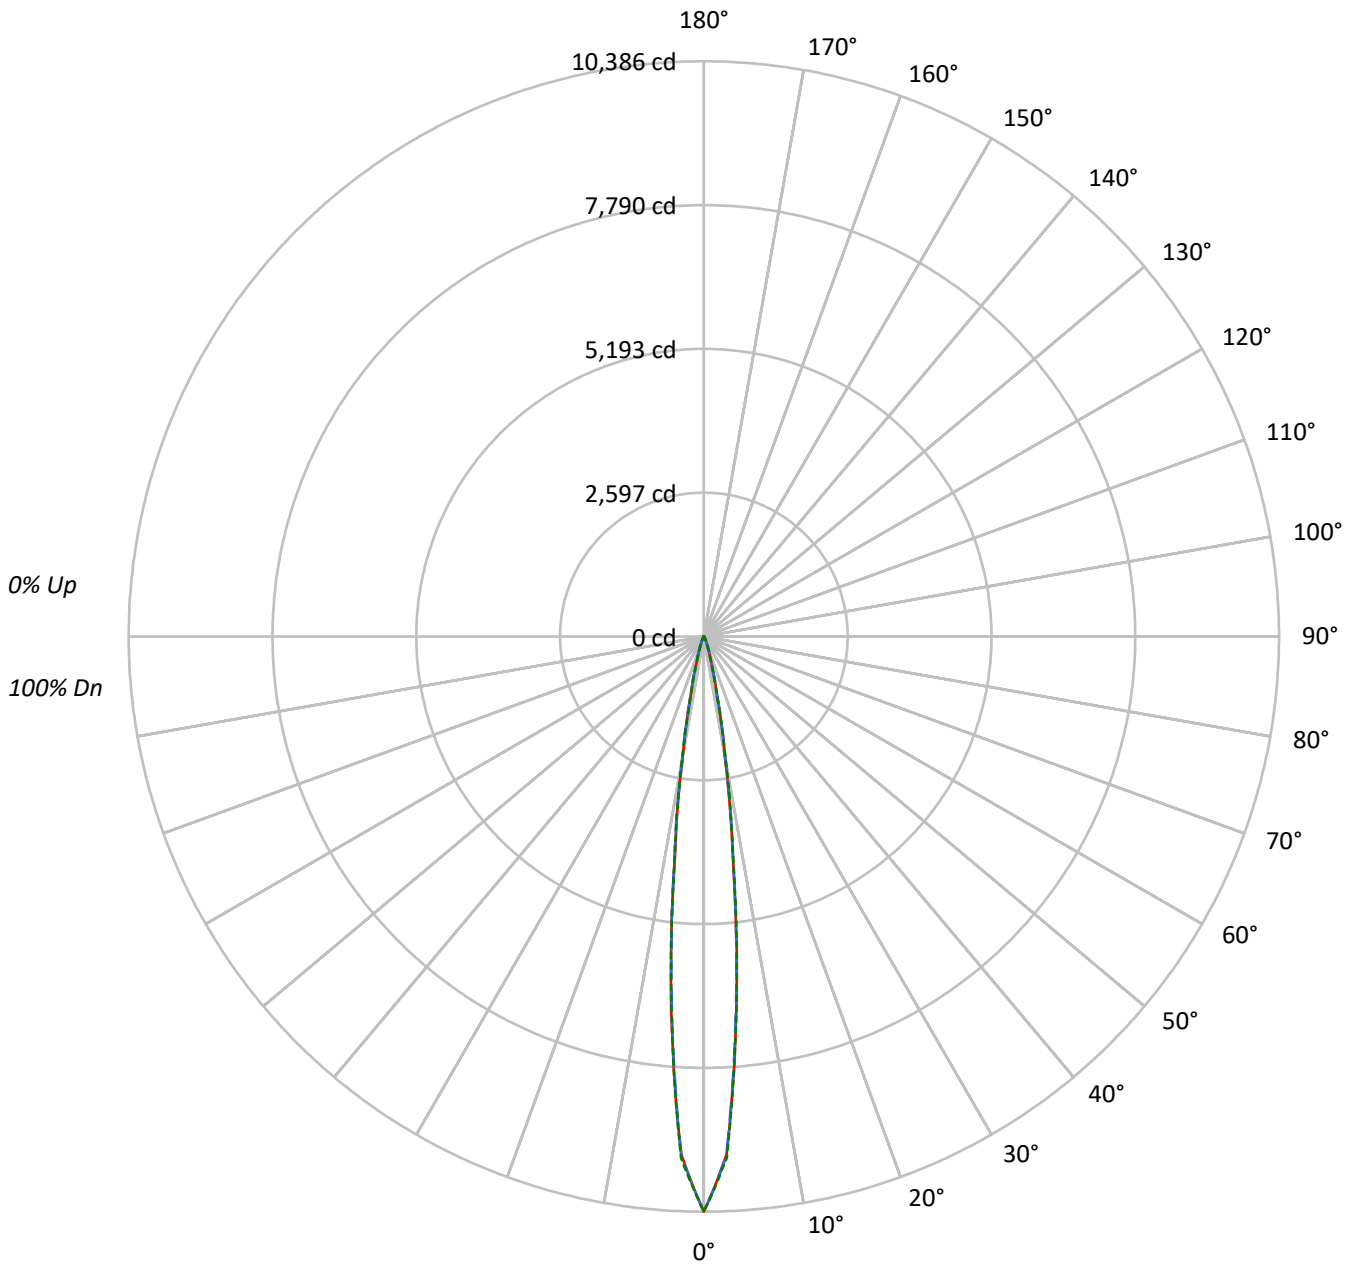



TEST NUMBER: P740916

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9050-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1168677	1168677	1168677
5°	686767	677875	683241
10°	204969	206406	209569
15°	50985	51975	50377
20°	15252	17666	15579
25°	5375	6847	5445
30°	1977	2598	2007
35°	988	1118	959
40°	625	689	625
45°	462	490	462
50°	369	369	369
55°	306	306	306
60°	246	246	246
65°	186	186	186
70°	161	161	161
75°	98	98	136
80°	71	71	71
85°	33	33	33

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 490 cd/sqm



TEST NUMBER: P740916

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9050-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	494.4	64.9
10°-20°	203.4	26.7
20°-30°	40.4	5.3
30°-40°	10.1	1.3
40°-50°	5.3	0.7
50°-60°	3.9	0.5
60°-70°	2.8	0.4
70°-80°	1.6	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	738.2	96.8
0°-40°	748.3	98.2
0°-60°	757.5	99.4
0°-90°	762.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	762.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	10386	10386	10386	10386	10386	
5°	6758	6688	6670	6716	6723	493
15°	587	598	598	588	580	201
25°	69	78	88	78	70	36
35°	14	14	15	14	13	9
45°	7	7	7	7	7	5
55°	4	4	4	4	4	4
65°	3	3	3	3	3	3
75°	1	1	1	1	2	2
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P740916

CATALOG NUMBER: LD4D08D010-EU4DR150210IC9050-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	10386.4	10386.4	10386.4	10386.4	10386.4
2.5°	9369.0	9376.9	9380.0	9389.2	9423.5
5°	6757.6	6688.2	6670.1	6716.3	6722.9
7.5°	4003.0	4017.0	4068.5	4079.9	4038.6
10°	2196.7	2214.7	2212.1	2227.9	2246.0
12.5°	1123.4	1109.3	1104.9	1123.0	1097.9
15°	587.0	598.0	598.4	587.9	580.0
17.5°	315.7	328.5	349.6	332.4	306.0
20°	186.4	197.9	215.9	201.8	190.4
22.5°	115.2	124.4	137.2	126.2	117.0
25°	69.0	78.3	87.9	77.8	69.9
27.5°	40.9	48.8	55.0	48.4	40.5
30°	26.4	30.8	34.7	30.3	26.8
32.5°	18.5	20.2	22.0	20.2	18.5
35°	13.6	14.5	15.4	14.5	13.2
37.5°	10.6	11.4	11.9	11.0	10.1
40°	8.8	9.2	9.7	9.2	8.8
42.5°	7.5	7.9	7.9	7.9	7.5
45°	6.6	6.6	7.0	6.6	6.6
47.5°	5.7	5.7	6.2	5.7	5.7
50°	5.3	5.3	5.3	5.3	5.3
52.5°	4.8	4.8	4.8	4.8	4.8
55°	4.4	4.4	4.4	4.4	4.4
57.5°	4.0	4.0	4.0	4.0	4.0
60°	3.5	3.5	3.5	3.5	3.5
62.5°	3.1	3.1	3.1	3.1	3.1
65°	2.6	2.6	2.6	2.6	2.6
67.5°	2.6	2.6	2.6	2.6	2.6
70°	2.2	2.2	2.2	2.2	2.2
72.5°	1.8	1.8	1.8	1.8	1.8
75°	1.3	1.3	1.3	1.3	1.8
77.5°	1.3	1.3	1.3	1.3	1.3
80°	0.9	0.9	0.9	0.9	0.9
82.5°	0.9	0.9	0.9	0.9	0.9
85°	0.4	0.4	0.4	0.4	0.4
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)