

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P754270

Luminaire Tested: LD4D80BD010-EU4DR6070959030-4LBSQW1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P754270
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D80BD010-EU4DR6070959030-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6090.2 lumens
Efficiency: N/A
Efficacy: 77.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 78.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P754270
CATALOG NUMBER: LD4D80BD010-EU4DR6070959030-4LBSQW1B

Luminous Intensity Polar Plot

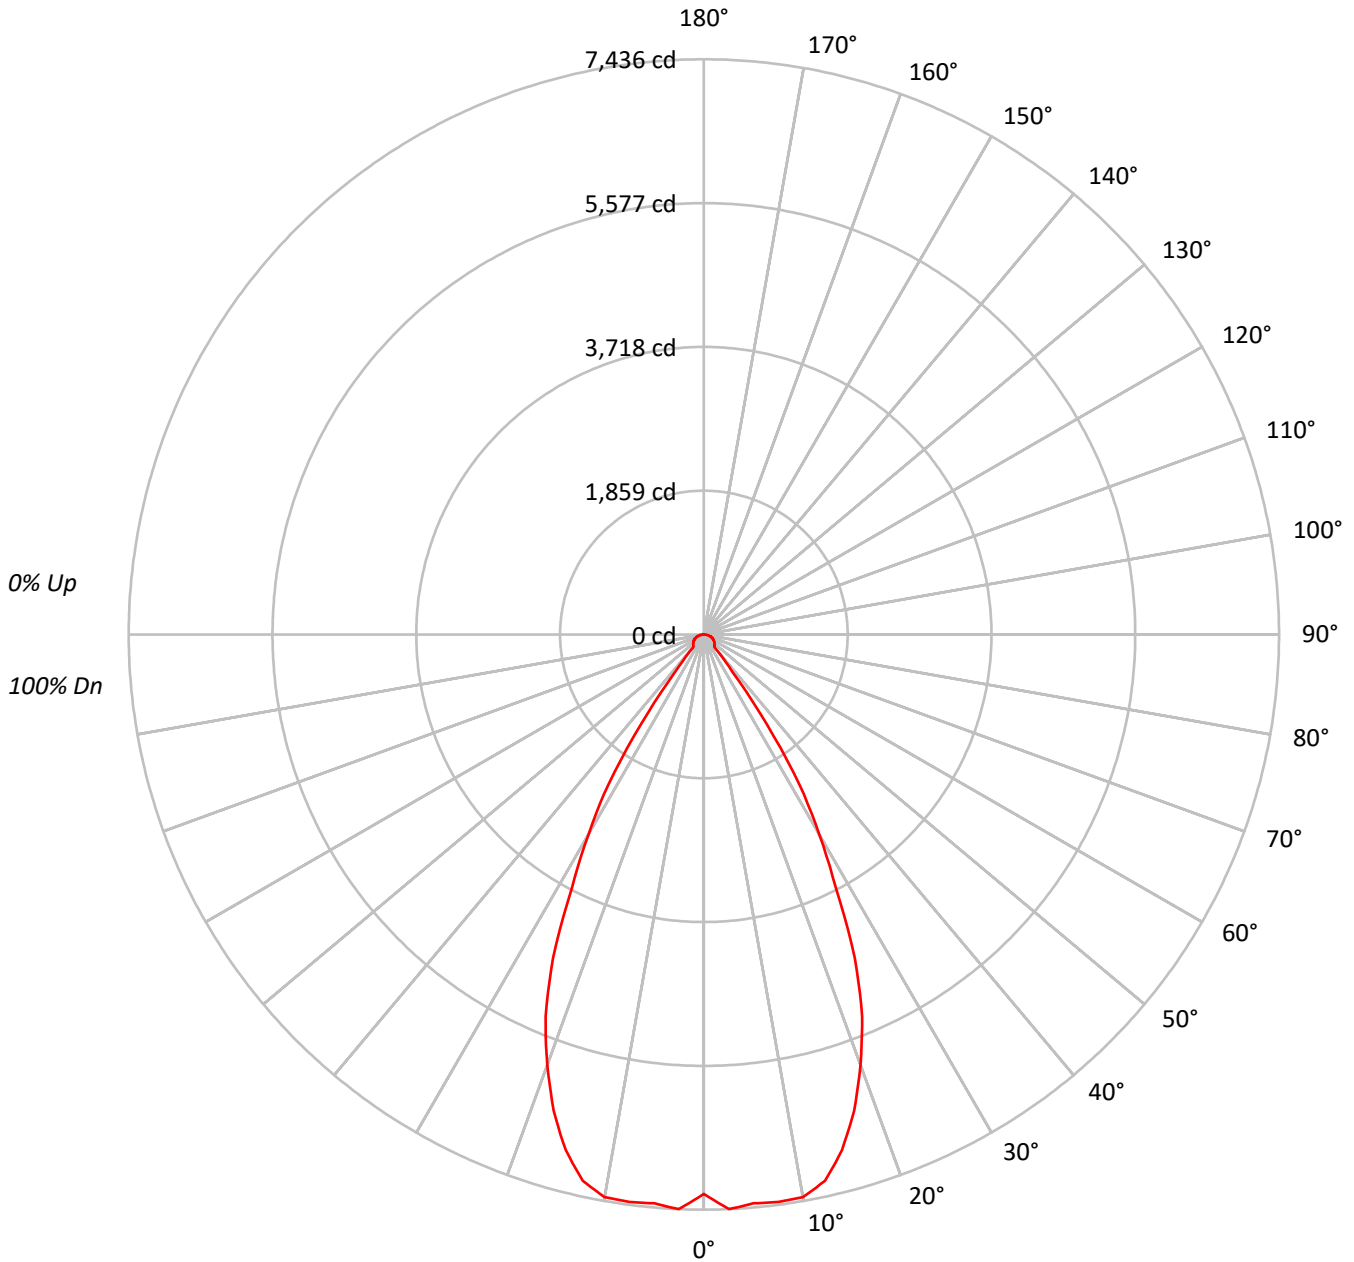



TEST NUMBER: P754270

CATALOG NUMBER: LD4D80BD010-EU4DR6070959030-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	790272
5°	809699
10°	819482
15°	780664
20°	688312
25°	556727
30°	376573
35°	188710
40°	30608
45°	29961
50°	30562
55°	31012
60°	31882
65°	32601
70°	33383
75°	33772
80°	32593
85°	27078

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 33772 cd/sqm



TEST NUMBER: P754270

CATALOG NUMBER: LD4D80BD010-EU4DR6070959030-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	705.6	11.6
10°-20°	1909.0	31.3
20°-30°	2053.9	33.7
30°-40°	892.8	14.7
40°-50°	150.0	2.5
50°-60°	145.8	2.4
60°-70°	124.7	2.0
70°-80°	83.4	1.4
80°-90°	24.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4668.5	76.7
0°-40°	5561.3	91.3
0°-60°	5857.1	96.2
0°-90°	6090.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6090.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7233	
5°	7382	706
15°	6902	1909
25°	4618	2054
35°	1415	893
45°	194	150
55°	163	146
65°	126	125
75°	80	83
85°	22	25
90°	0	



TEST NUMBER: P754270

CATALOG NUMBER: LD4D80BD010-EU4DR6070959030-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	7232.9
2.5°	7436.2
5°	7382.5
7.5°	7399.5
10°	7386.3
12.5°	7233.8
15°	6901.5
17.5°	6455.4
20°	5919.8
22.5°	5346.5
25°	4618.0
27.5°	3693.6
30°	2984.8
32.5°	2300.5
35°	1414.8
37.5°	605.2
40°	214.6
42.5°	197.7
45°	193.9
47.5°	187.3
50°	179.8
52.5°	171.3
55°	162.8
57.5°	154.4
60°	145.9
62.5°	136.5
65°	126.1
67.5°	115.8
70°	104.5
72.5°	92.2
75°	80.0
77.5°	65.9
80°	51.8
82.5°	36.7
85°	21.6
87.5°	7.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)