

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755143

Luminaire Tested: LD4D85BD010-EU4DR6570959040-4LBCSSQMB

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P755143
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D85BD010-EU4DR6570959040-4LBCSSQMB
Description: 4 INCH SQAURE SHALLOW CAST MATTE BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7541.3 lumens
Efficiency: N/A
Efficacy: 86.0 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 87.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P755143
CATALOG NUMBER: LD4D85BD010-EU4DR6570959040-4LBCSSQMB

Luminous Intensity Polar Plot

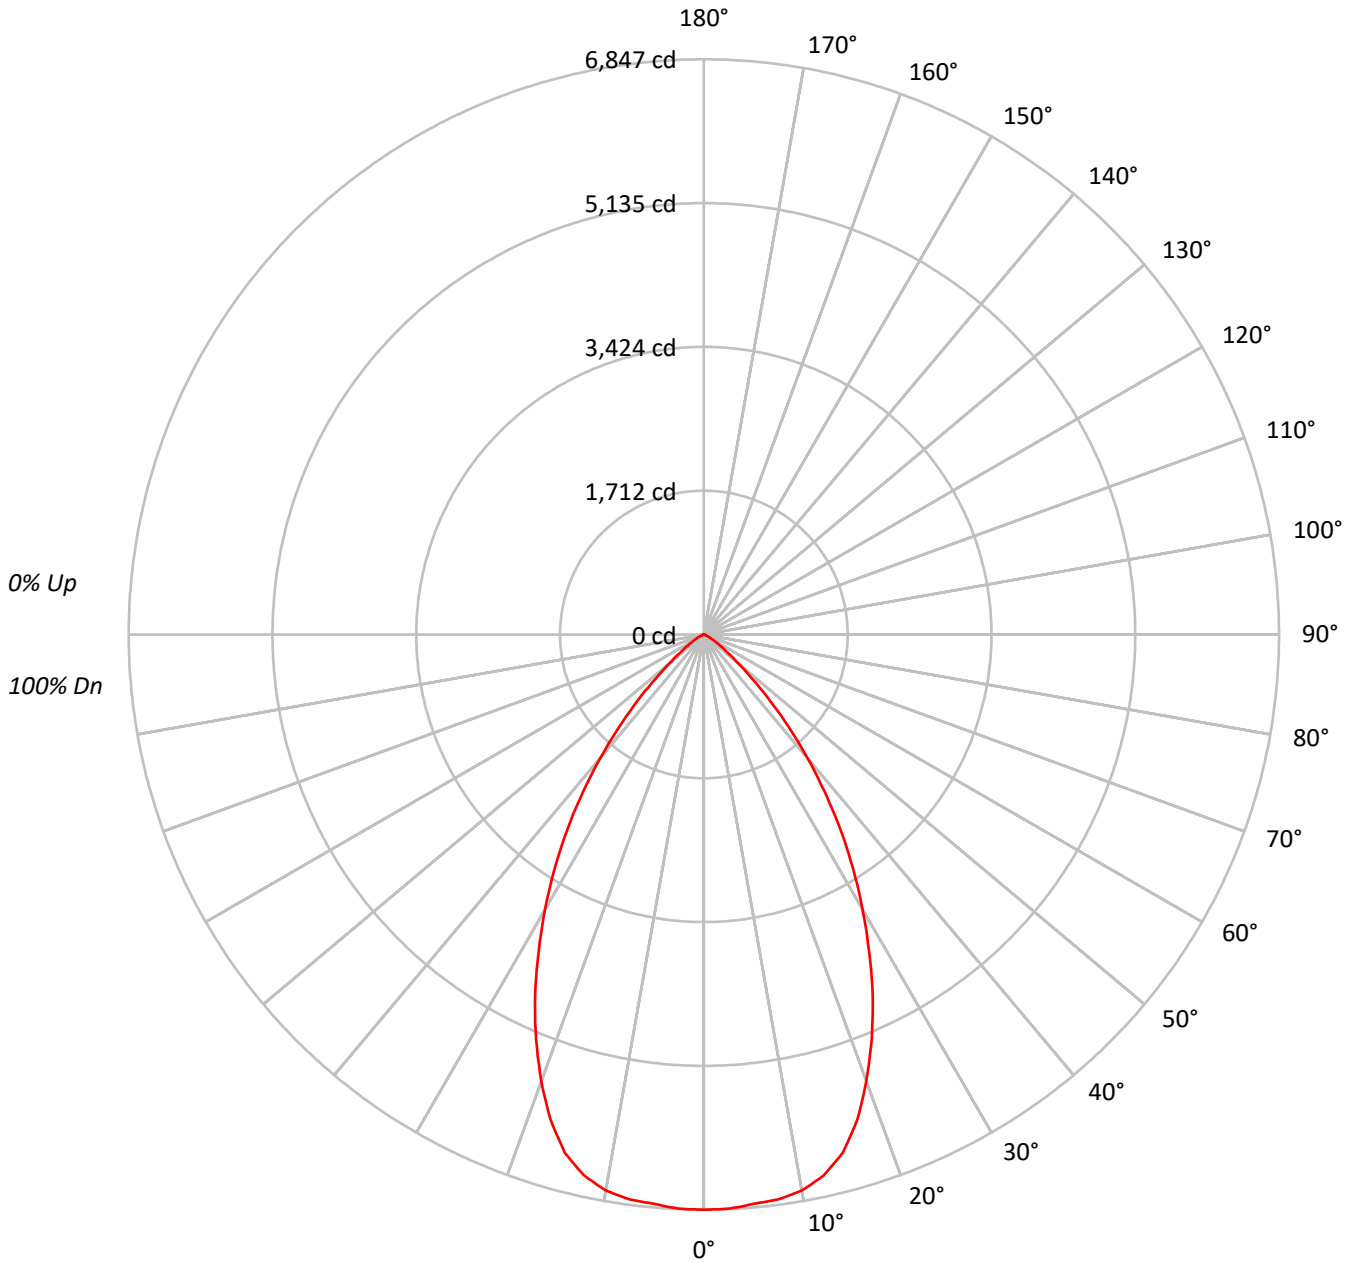



TEST NUMBER: P755143

CATALOG NUMBER: LD4D85BD010-EU4DR6570959040-4LBCSSQMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	399909
5°	398898
10°	398558
15°	386275
20°	351657
25°	306445
30°	254879
35°	201951
40°	145757
45°	92086
50°	48001
55°	25507
60°	13398
65°	7366
70°	3091
75°	3407
80°	2354
85°	2010

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 92086 cd/sqm



TEST NUMBER: P755143

CATALOG NUMBER: LD4D85BD010-EU4DR6570959040-4LBCSSQMB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	647.5	8.6
10°-20°	1773.2	23.5
20°-30°	2167.5	28.7
30°-40°	1758.6	23.3
40°-50°	876.4	11.6
50°-60°	244.4	3.2
60°-70°	55.5	0.7
70°-80°	14.5	0.2
80°-90°	3.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4588.2	60.8
0°-40°	6346.8	84.2
0°-60°	7467.6	99.0
0°-90°	7541.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7541.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6847	
5°	6804	648
15°	6388	1773
25°	4755	2167
35°	2832	1759
45°	1115	876
55°	250	244
65°	53	56
75°	15	14
85°	3	4
90°	0	



TEST NUMBER: P755143

CATALOG NUMBER: LD4D85BD010-EU4DR6570959040-4LBCSSQMB

CANDELA DISTRIBUTION (FULL):

	0°
0°	6847.3
2.5°	6842.3
5°	6804.0
7.5°	6781.9
10°	6720.5
12.5°	6595.8
15°	6388.5
17.5°	6064.5
20°	5658.0
22.5°	5219.3
25°	4755.4
27.5°	4259.3
30°	3779.4
32.5°	3305.4
35°	2832.5
37.5°	2360.6
40°	1911.8
42.5°	1491.2
45°	1114.9
47.5°	776.8
50°	528.3
52.5°	364.3
55°	250.5
57.5°	169.0
60°	114.7
62.5°	79.5
65°	53.3
67.5°	27.2
70°	18.1
72.5°	17.1
75°	15.1
77.5°	10.1
80°	7.0
82.5°	5.0
85°	3.0
87.5°	2.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)