

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755415

Luminaire Tested: LD4D90BD010-EU4DR3570959024-4LBSQW1MW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P755415
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D90BD010-EU4DR3570959024-4LBSQW1MW
Description: 4 INCH SQAURE DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6437.5 lumens
Efficiency: N/A
Efficacy: 65.1 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P755415
CATALOG NUMBER: LD4D90BD010-EU4DR3570959024-4LBSQW1MW

Luminous Intensity Polar Plot

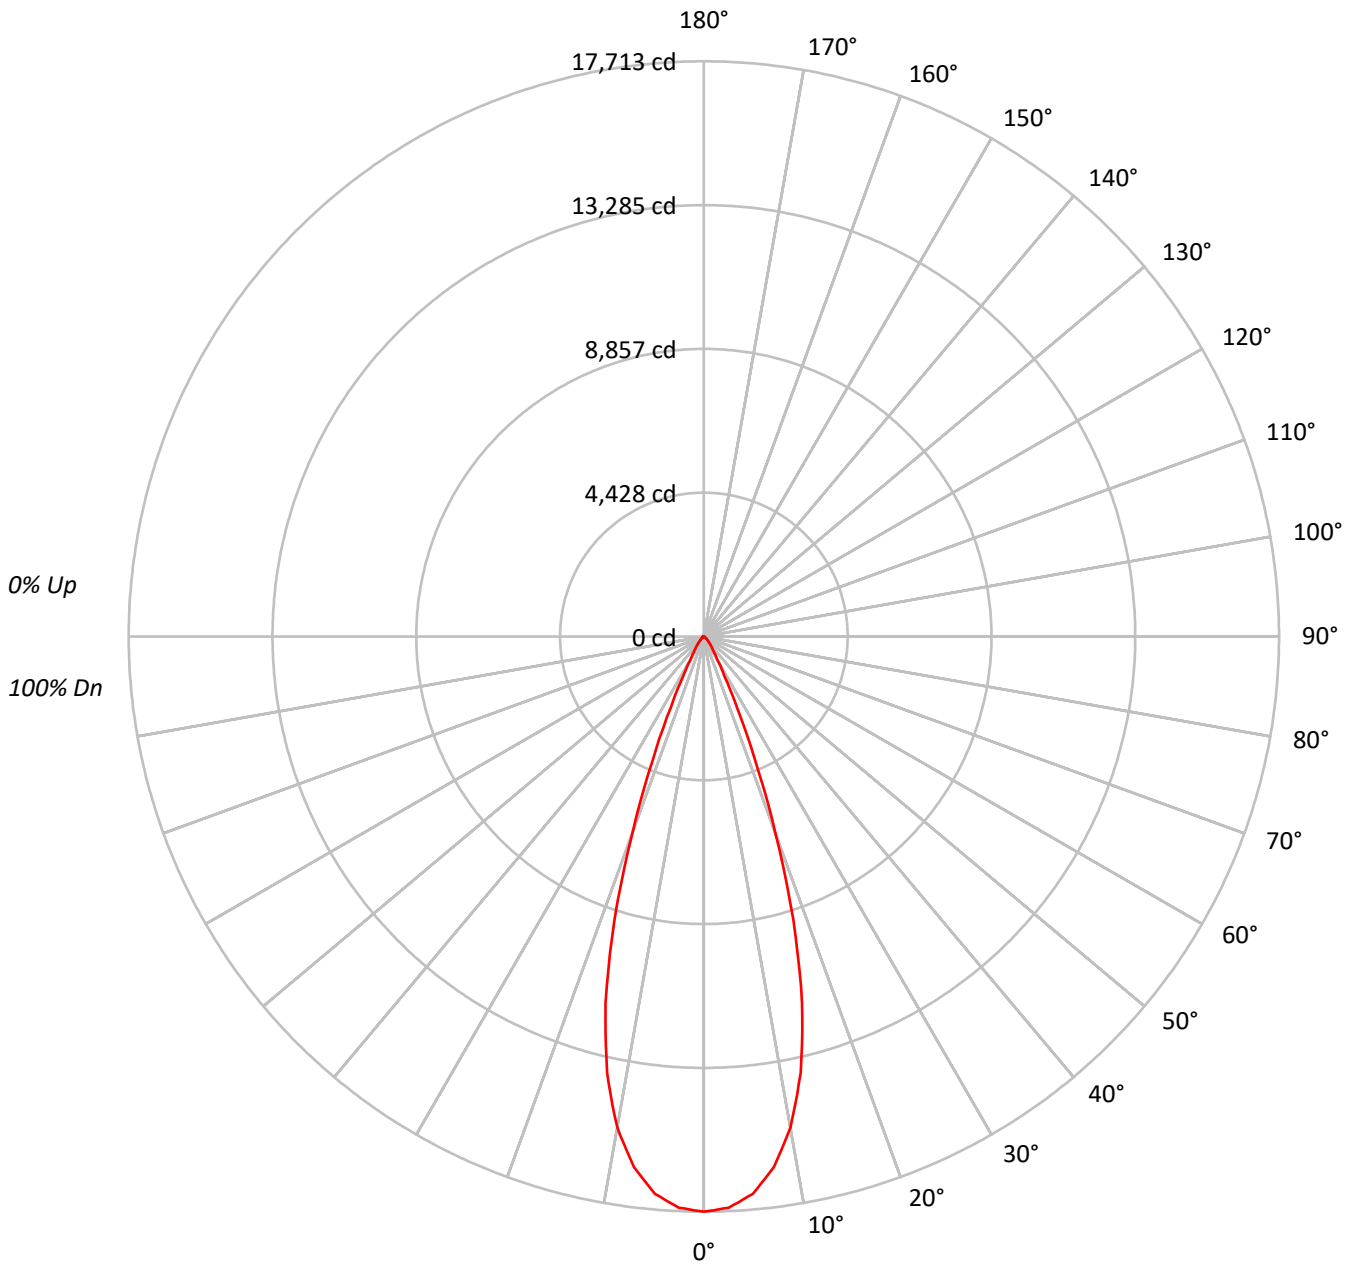



TEST NUMBER: P755415

CATALOG NUMBER: LD4D90BD010-EU4DR3570959024-4LBSQW1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96						96													
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92						92													
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88						88													
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84						84													
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81						81													
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78						78													
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75						75													
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72						72													
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70						70													
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68						68													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1935303
5°	1889831
10°	1703236
15°	1321987
20°	749809
25°	291709
30°	108829
35°	59649
40°	38995
45°	23734
50°	15111
55°	10667
60°	7801
65°	4240
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 23734 cd/sqm



TEST NUMBER: P755415

CATALOG NUMBER: LD4D90BD010-EU4DR3570959024-4LBSQW1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1584.7	24.6
10°-20°	3094.1	48.1
20°-30°	1261.9	19.6
30°-40°	302.0	4.7
40°-50°	125.8	2.0
50°-60°	52.1	0.8
60°-70°	16.3	0.3
70°-80°	0.4	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5940.6	92.3
0°-40°	6242.6	97.0
0°-60°	6420.5	99.7
0°-90°	6437.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6437.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	17713	
5°	17231	###
15°	11687	3094
25°	2420	1262
35°	447	302
45°	154	126
55°	56	52
65°	16	16
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P755415

CATALOG NUMBER: LD4D90BD010-EU4DR3570959024-4LBSQW1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	17712.7
2.5°	17606.5
5°	17230.7
7.5°	16481.1
10°	15351.9
12.5°	13762.0
15°	11687.1
17.5°	9149.5
20°	6448.7
22.5°	4112.1
25°	2419.7
27.5°	1367.8
30°	862.6
32.5°	605.7
35°	447.2
37.5°	345.8
40°	273.4
42.5°	210.6
45°	153.6
47.5°	114.9
50°	88.9
52.5°	70.5
55°	56.0
57.5°	45.4
60°	35.7
62.5°	26.1
65°	16.4
67.5°	5.8
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)