

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755492

Luminaire Tested: LD4D90BD010-EU4DR4070959024-4LBSQW1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P755492
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D90BD010-EU4DR4070959024-4LBSQW1B
Description: 4 INCH SQAURE DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6568.8 lumens
Efficiency: N/A
Efficacy: 66.4 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P755492
CATALOG NUMBER: LD4D90BD010-EU4DR4070959024-4LBSQW1B

Luminous Intensity Polar Plot

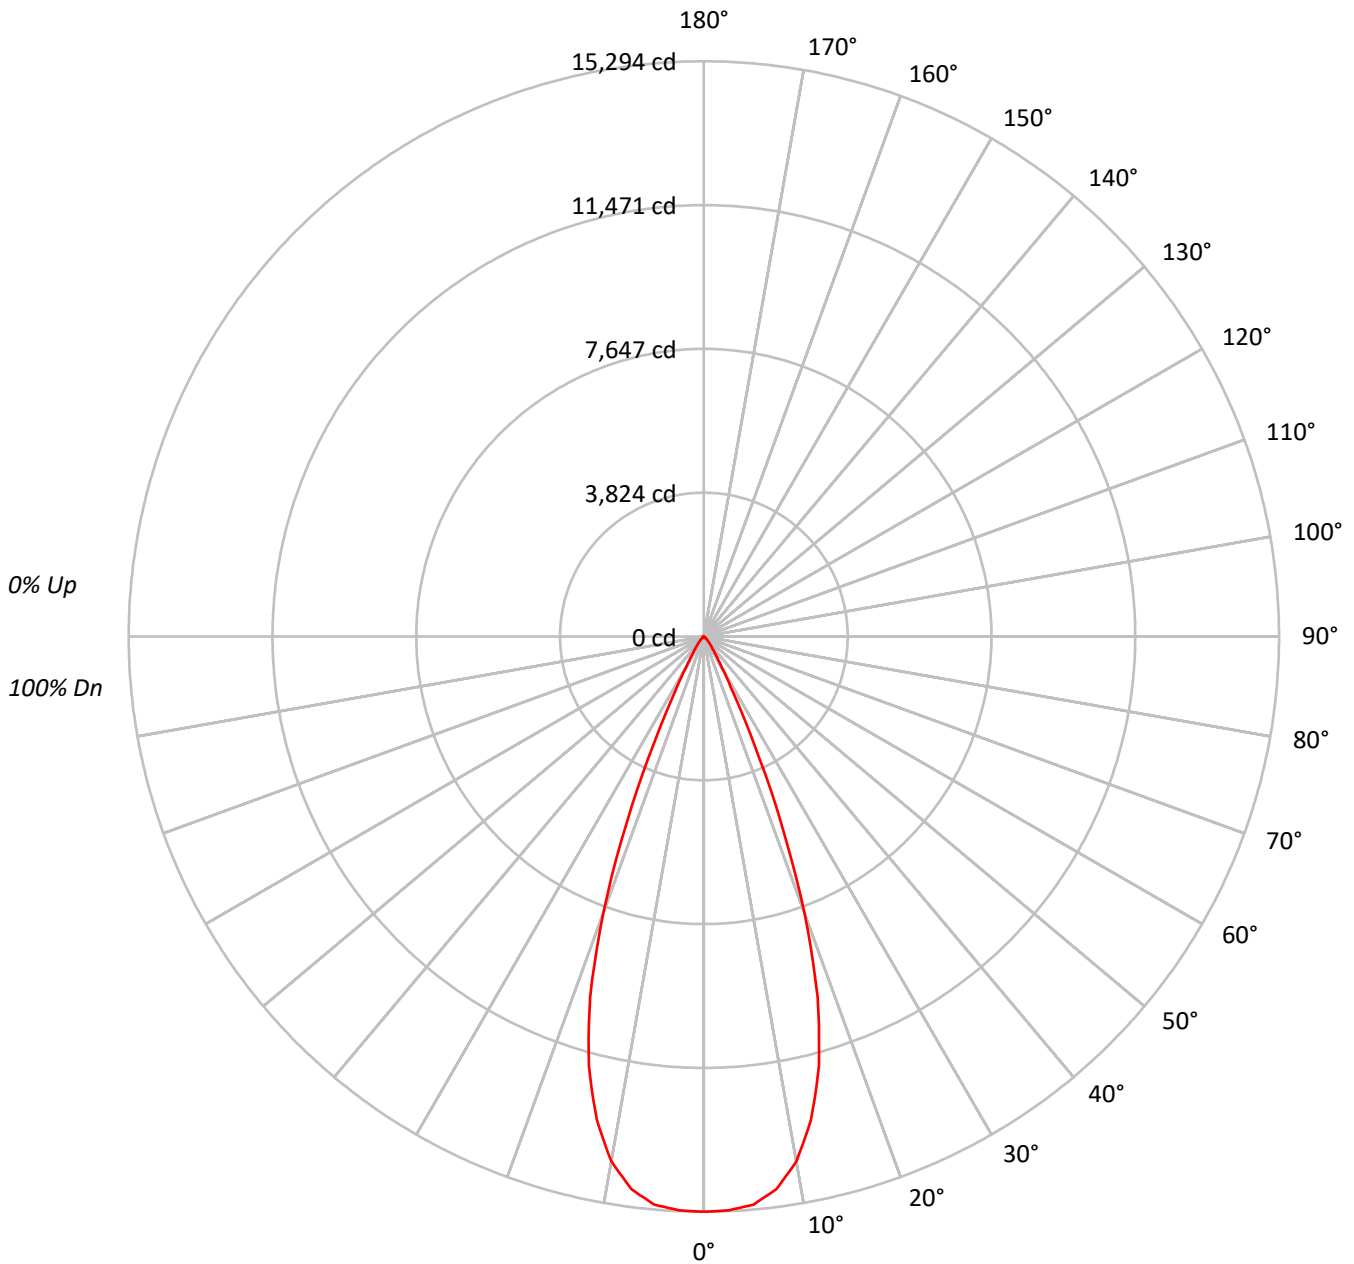



TEST NUMBER: P755492

CATALOG NUMBER: LD4D90BD010-EU4DR4070959024-4LBSQW1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					100														
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96					96														
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92					92														
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88					88														
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84					84														
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81					81														
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77					77														
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74					74														
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72					72														
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69					69														
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67					67														

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1671023
5°	1662896
10°	1571798
15°	1336228
20°	910742
25°	379992
30°	119477
35°	55527
40°	30708
45°	14077
50°	6833
55°	3753
60°	1945
65°	698
70°	288
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 14077 cd/sqm



TEST NUMBER: P755492

CATALOG NUMBER: LD4D90BD010-EU4DR4070959024-4LBSQW1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1415.7	21.6
10°-20°	3171.6	48.3
20°-30°	1587.6	24.2
30°-40°	291.0	4.4
40°-50°	80.3	1.2
50°-60°	18.9	0.3
60°-70°	3.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6174.9	94.0
0°-40°	6465.9	98.4
0°-60°	6565.0	99.9
0°-90°	6568.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6568.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	15294	
5°	15162	###
15°	11813	3172
25°	3152	1588
35°	416	291
45°	91	80
55°	20	19
65°	3	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P755492

CATALOG NUMBER: LD4D90BD010-EU4DR4070959024-4LBSQW1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	15293.9
2.5°	15271.5
5°	15161.6
7.5°	14811.4
10°	14167.2
12.5°	13163.0
15°	11813.0
17.5°	10057.4
20°	7832.8
22.5°	5340.1
25°	3152.0
27.5°	1666.3
30°	947.0
32.5°	612.0
35°	416.3
37.5°	297.5
40°	215.3
42.5°	147.4
45°	91.1
47.5°	58.1
50°	40.2
52.5°	28.6
55°	19.7
57.5°	12.5
60°	8.9
62.5°	5.4
65°	2.7
67.5°	1.8
70°	0.9
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)