

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P755340

Luminaire Tested: LD4D90BD010-EU4DR3070959027-4LBCSSQMW

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P755340
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D90BD010-EU4DR3070959027-4LBCSSQMW
Description: 4 INCH SQAURE SHALLOW CAST MATTE WHITE TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7441.0 lumens
Efficiency: N/A
Efficacy: 75.2 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct


Input Watts (W): 98.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P755340

CATALOG NUMBER: LD4D90BD010-EU4DR3070959027-4LBCSSQMW

Luminous Intensity Polar Plot

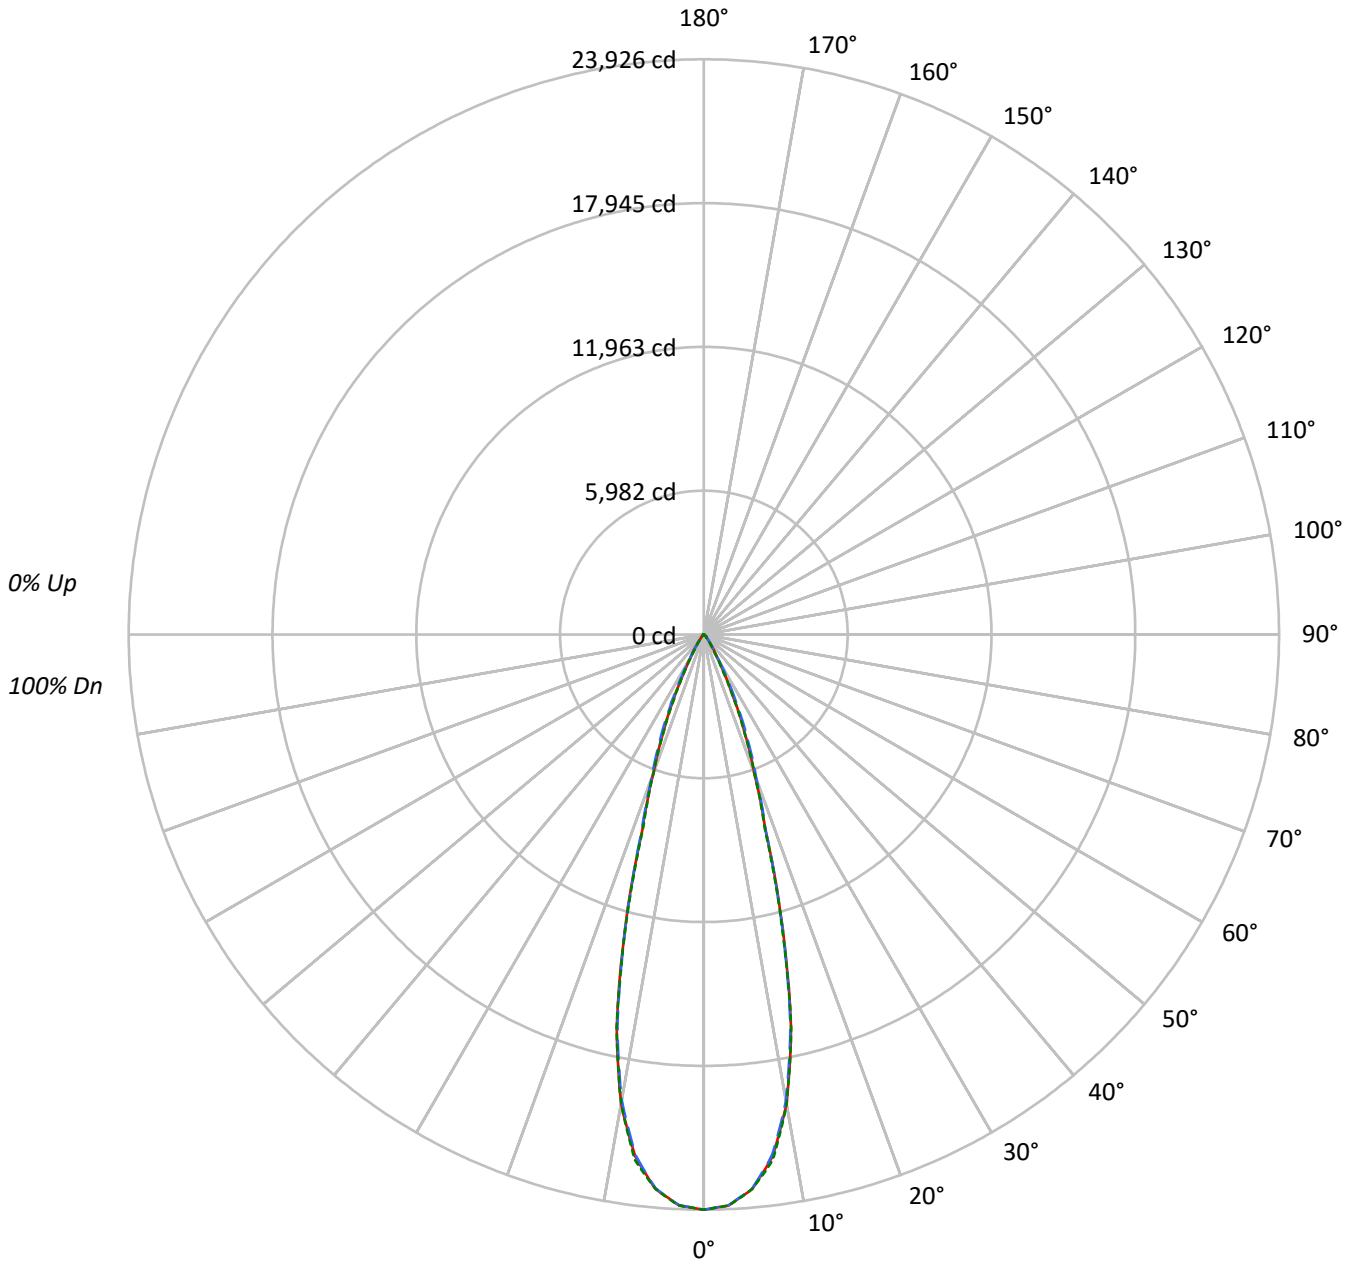



TEST NUMBER: P755340

CATALOG NUMBER: LD4D90BD010-EU4DR3070959027-4LBCSSQMW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1831408	1831408	1831408
5°	1778833	1776758	1778925
10°	1540742	1529877	1540377
15°	1005252	999856	994832
20°	499870	518621	499194
25°	251798	283942	246638
30°	100812	109845	87837
35°	46758	44787	37536
40°	20184	22422	19015
45°	14246	17677	14365
50°	4894	12873	5180
55°	2816	5325	2976
60°	1975	2342	1975
65°	1268	1268	1268
70°	783	515	783
75°	0	355	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 17677 cd/sqm



TEST NUMBER: P755340

CATALOG NUMBER: LD4D90BD010-EU4DR3070959027-4LBCSSQMW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2104.0	28.3
10°-20°	3388.5	45.5
20°-30°	1464.2	19.7
30°-40°	333.7	4.5
40°-50°	114.6	1.5
50°-60°	28.0	0.4
60°-70°	7.2	0.1
70°-80°	0.8	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6956.7	93.5
0°-40°	7290.4	98.0
0°-60°	7433.0	99.9
0°-90°	7441.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7441.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	23926	23926	23926	23926	23926	
5°	23151	23129	23124	23172	23152	2106
15°	12686	12533	12618	12576	12554	3397
25°	2981	3094	3362	3016	2920	1427
35°	500	511	479	476	402	339
45°	132	163	163	163	133	93
55°	21	22	40	24	22	21
65°	7	7	7	7	7	7
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P755340

CATALOG NUMBER: LD4D90BD010-EU4DR3070959027-4LBCSSQMW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	23926.4	23926.4	23926.4	23926.4	23926.4
2.5°	23767.8	23751.4	23760.8	23772.5	23777.2
5°	23151.1	23128.8	23124.1	23172.2	23152.3
7.5°	21907.1	21875.4	21827.2	21936.5	22038.7
10°	19823.2	19787.9	19683.4	19735.1	19818.5
12.5°	16746.6	16632.7	16630.3	16794.8	16772.5
15°	12685.6	12532.9	12617.5	12576.4	12554.1
17.5°	8530.7	8472.0	8584.8	8550.7	8403.8
20°	6136.7	6151.9	6366.9	6258.8	6128.4
22.5°	4478.0	4533.2	4788.1	4509.7	4407.5
25°	2981.4	3094.2	3362.0	3015.5	2920.3
27.5°	1833.7	1885.4	2156.8	1810.2	1758.5
30°	1140.6	1114.8	1242.8	1066.6	993.8
32.5°	748.3	715.4	756.5	679.0	620.2
35°	500.4	511.0	479.3	475.8	401.7
37.5°	312.5	359.5	317.2	338.3	258.4
40°	202.0	260.8	224.4	247.9	190.3
42.5°	165.6	200.9	184.4	196.2	169.2
45°	131.6	163.3	163.3	163.3	132.7
47.5°	72.8	109.2	139.8	111.6	77.5
50°	41.1	55.2	108.1	57.6	43.5
52.5°	28.2	31.7	74.0	32.9	29.4
55°	21.1	22.3	39.9	23.5	22.3
57.5°	16.4	17.6	21.1	17.6	16.4
60°	12.9	12.9	15.3	14.1	12.9
62.5°	9.4	9.4	10.6	9.4	9.4
65°	7.0	7.0	7.0	7.0	7.0
67.5°	3.5	4.7	4.7	4.7	4.7
70°	3.5	2.3	2.3	2.3	3.5
72.5°	2.3	1.2	1.2	1.2	1.2
75°	0.0	0.0	1.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)